

SLIDE GUIDE

BALL SPLINE
ROTARY BALL SPLINE
STROKE BALL SPLINE

TOPBALL® PRODUCTS

SLIDE BUSH

SLIDE UNIT

STROKE BUSH
SLIDE ROTARY BUSH

SLIDE SHAFT

SLIDE WAY/GONIO WAY
SLIDE TABLE
MINIATURE SLIDE

ACTUATOR

SLIDE SCREW

SLIDE BUSH

SLIDE BUSH

The NB slide bush is a linear motion mechanism utilizing the rotational motion of ball elements. Since linear motion is obtained using a simple mechanism, the slide bush can be used in a wide variety of applications, including transportation equipment, food processing equipment, and semiconductor equipment.

STRUCTURE AND ADVANTAGES

The NB slide bush consists of the outer cylinder and a ball retainer that guide the circulation of the ball elements, resulting in smooth linear motion.

Compact Mechanism:

The NB slide bush uses a round shaft for the guide, resulting in effective space utilization, which allows for compact designs.

A Wide Variety of Shapes and Installation Methods:

The NB slide bush is available in various shapes, which make it suitable for various types of installations : lightweight, standard, clearance adjustable, open, flange, and double-wide types.

Selection According to Environment:

Standard and anticorrosion NB slide bushes are available. Additionally, options available are both metallic retainers suitable for use in harsh environments and low acoustic, low-cost resin retainers.

These options can be specified according to application need.

Compatibility:

The NB slide bush is fully compatible with a variety of shaft types.

Low Friction:

The raceway surface is precision ground. Since the contact surface between the ball elements and the raceway surface is minimized, the NB slide bush provides low friction when compared to other linear motion mechanisms.

GM type series:

The GM Slide Bush makes efficient use of resin components making it possible to achieve an overall weight reduction of 30~50% when compared with the SM Slide Bush.

The ball return section is configured completely in resin material, which provides for low noise operation.

Figure D-1 Basic Structure of NB Slide Bush (GM)


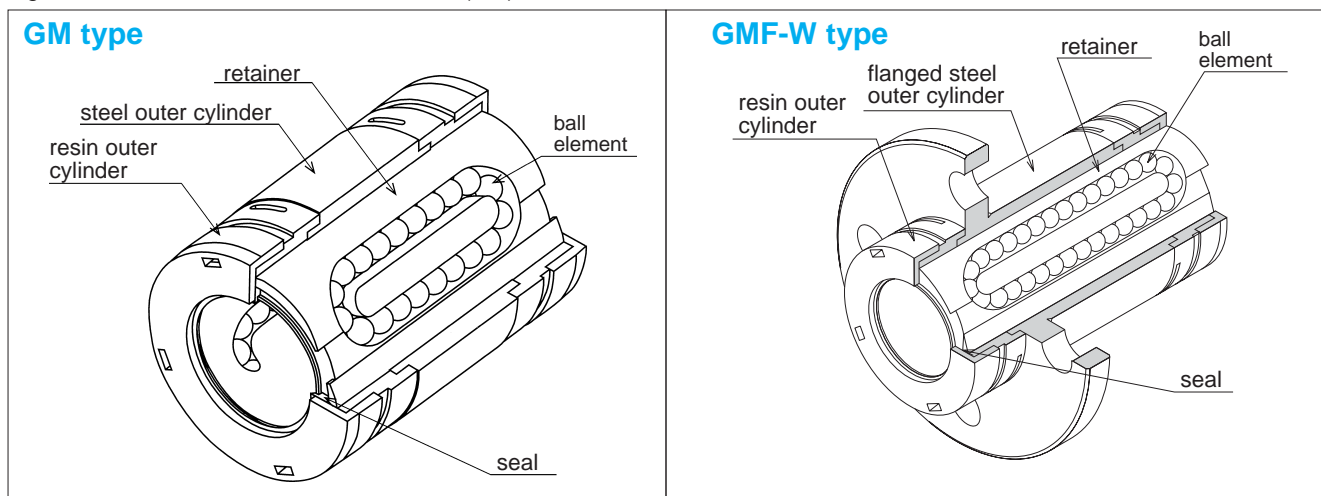


Figure D-2 Basic Structure of NB Slide Bush (SM, KB, SW)

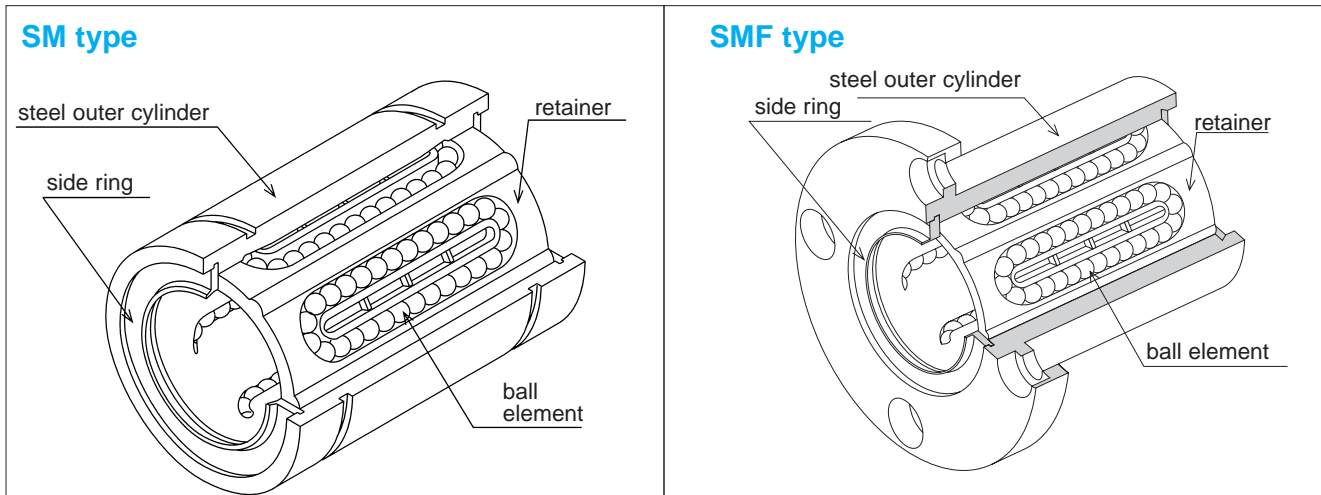

TYPES

Table D-1 Types (1)





type	standard	page
GM/GW type 	GM	D- 12
	GW	D-120
GM double-wide type 	GM-W	D- 13
GM double-wide flange type 	GMF-W	D- 14
	GMK-W	D- 16
	GMT-W	D- 18
GM double-wide pilot end flange type 	GMF-W-E	D- 20
	GMK-W-E	D- 22
	GMT-W-E	D- 24

Table D-2 Types (2)















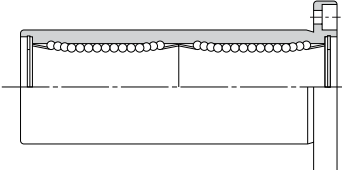





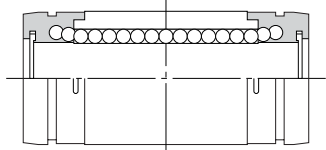




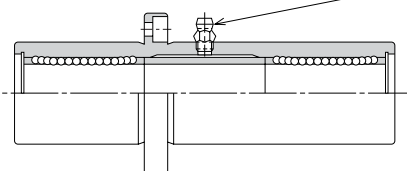

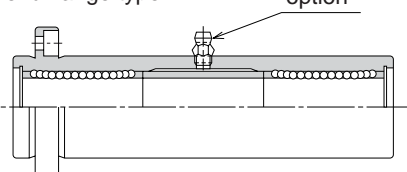

type		standard	anticorrosion	page
standard type 		SM	SMS	D- 26
		KB	KBS	D- 76
		SW	SWS	D- 98
clearance-adjustable (AJ) type 		SM-AJ	SMS-AJ	D- 28
		KB-AJ	KBS-AJ	D- 78
		SW-AJ	SWS-AJ	D-100
open (OP) type 		SM-OP	SMS-OP	D- 30
		KB-OP	KBS-OP	D- 80
		SW-OP	SWS-OP	D-102
double-wide type 		SM-W	SMS-W	D- 32
		KB-W	KBS-W	D- 82
		SW-W	SWS-W	D-104
flange type 		SMF	SMSF	D- 34
		KBF	KBSF	D- 84
		SWF	SWSF	D-106
		SMK	SMSK	D- 36
		KBK	KBSK	D- 86
		SWK	SWSK	D-108
		SMT	SMST	D- 38
		KBT	KBST	D- 88
		SWT	SWST	D-110
flange type with pilot end 		SMF-E	SMSF-E	D- 40
		SMK-E	SMSK-E	D- 42
		SMT-E	SMST-E	D- 44

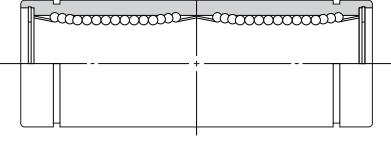Table D-3 Types (3)

type		standard	anticorrosion	page	
double wide flange type 		SMF-W	SMSF-W	D- 46	
		KBF-W	KBSF-W	D- 90	
		SWF-W	SWSF-W	D-112	
		SMK-W	SMSK-W	D- 48	
		KBK-W	KBSK-W	D- 92	
		SWK-W	SWSK-W	D-114	
center mount flange type 		SMFC	SMSFC	D- 52	
		KBFC	KBSFC	D- 94	
		SWFC	SWSFC	D-116	
		SMKC	SMSKC	D- 54	
		KBKC	KBSKC	D- 96	
		SWKC	SWSKC	D-118	
double-wide pilot end flange type 		SMF-W-E	SMSF-W-E	D- 58	
			SMK-W-E	SMSK-W-E	D- 60
			SMT-W-E	SMST-W-E	D- 62
triple wide flange type  <p>option</p> <p>※ Outer cylinder is treated with electroless nickel plating</p>		TRF	—	D- 64	
		TRK	—	D- 66	
triple-wide intermediate position flange type  <p>option</p> <p>※ Outer cylinder is treated with electroless nickel plating</p>		TRFC	—	D- 68	
		TRKC	—	D- 70	
triple-wide pilot end flange type  <p>option</p> <p>※ Outer cylinder is treated with electroless nickel plating</p>		TRF-E	—	D- 72	
		TRK-E	—	D- 74	

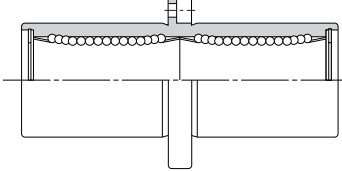SPECIFICATIONS

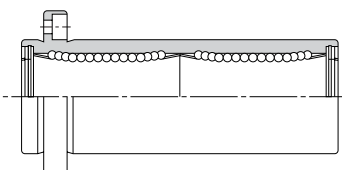Dimensional Series:

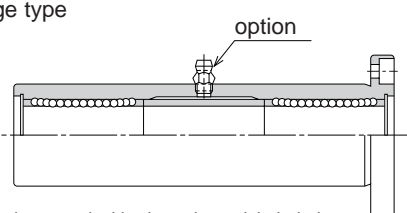The NB slide bush is available in three primary dimensional series, each with different dimensions and tolerances depending on the location of use. Select the series most appropriate for your location.

Allowable Load:

NB slide bushes are categorized into three functional types depending on the number and location of retainers: single, double, and triple. The single type uses only one retainer, so when a moment load is to be applied, the double or triple type should be used.

Material:

The standard NB slide bush uses a bearing steel outer cylinder. The anti-corrosion NB slide bush uses Martensitic stainless steel. Seamless type steel (stainless steel for the anticorrosion type) retainers and resin retainers for low acoustic operation can be specified.

Seals:

The seals effectively retain the lubricant within the slide bush, extending the time between lubrications. The UU type has seals on both sides. The U type has a seal only on one side and is available for the standard, clearance adjustable, and open types. Nitril rubber, which has low wear and good sealing characteristics, is used as the seal material.

※ Resin seals are used for GM type.

Table D-4 Dimensional Series and Use Location

series		location			
		Japan	Asia	Europe	North America
mm dimension	GM	◎	◎	○	○
	SM	○	○	◎	○
	KB	○	○	◎	○
inch dimension	SW	○	○	○	◎

◎ generally used ○ rarely used

Table D-5 Comparison of Allowable Loads

type	basic dynamic load rating	basic static load rating	allowable static moment
single	1	1	1
GM-W	1.6	2	4 approx.
double	1.6	2	6 approx.
triple	1.6	2	21 approx.


※ The single type is designated as "1" for comparison purposes.

Table D-6 Operating Environment Temperature

material		temperature range
outer cylinder	retainer	
steel	steel	-20°C ~ 110°C
	resin	-20°C ~ 80°C
stainless	steel	-20°C ~ 140°C*
	resin	-20°C ~ 80°C

* When a slide bush with seals is used, the temperature should never exceed 120°C.

Figure D-3 Seal Profile

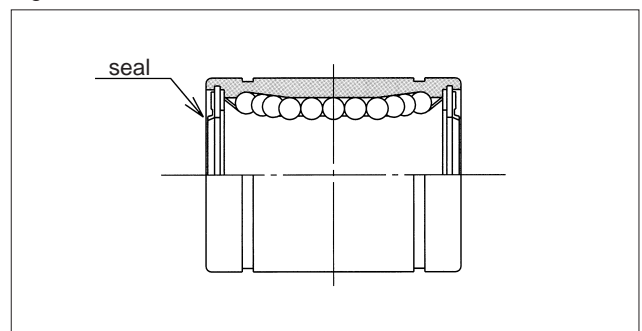

LIFE CALCULATION

Since ball elements are used as the rolling element in the NB slide bush, Equation (6) is used to calculate the Travel life.

$$L = \left(\frac{f_H \cdot f_T \cdot f_C}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50 \dots \dots \dots (6)$$

L : travel life (Km) f_H : hardness coefficient
 f_T : temperature coefficient f_w : load coefficient
 C : basic dynamic load rating P : load (N)
 *Refer to page Eng. 5 for the coefficient.

If the stroke distance and number of strokes per unit time are constant, the life is calculated using Equation (9).

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell \cdot s \cdot n_1 \cdot 60} \dots \dots \dots (9)$$

Lh : travel life in time (h) ℓ s : stroke distance (m)
 L : travel life (Km) n_1 : stroke frequency per min (cpm)

LOAD RATING FOR OPEN TYPE SLIDE BUSH

In the open type slide bush, an opening is provided to allow the shaft to be supported from underneath. When a load is constantly applied in the direction of the opening (for example, when used with a vertical shaft or when an overhang loading is applied), the rated load decreases due to the reduction in the number of rows of ball elements that are loaded. Therefore, the load rating must be calibrated at the time of design based on the direction of the loading.

Table D-7 Direction of Load and Basic Static Load Rating

part number	SM10G~16G-OP KB12G~16G-OP SW 8G~10G-OP	SM20(G)-OP KB20(G)-OP SW12(G)-OP	SM25(G)~100-OP KB25(G)~80-OP SW16(G)~64-OP	SM120,150-OP
loading from above	Load P 	Load P 	Load P 	Load P
	C	C	C	C
loading from below	Load P 	Load P 	Load P 	Load P
	0.64C	0.54C	0.57C	0.35C

※ Excludes SM12G-OP and all 3-row steel retainer open types.

MOUNTING

Examples of Mounting methods are shown in Figures D-4 ~D-7.

Figure D-4 Standard Type

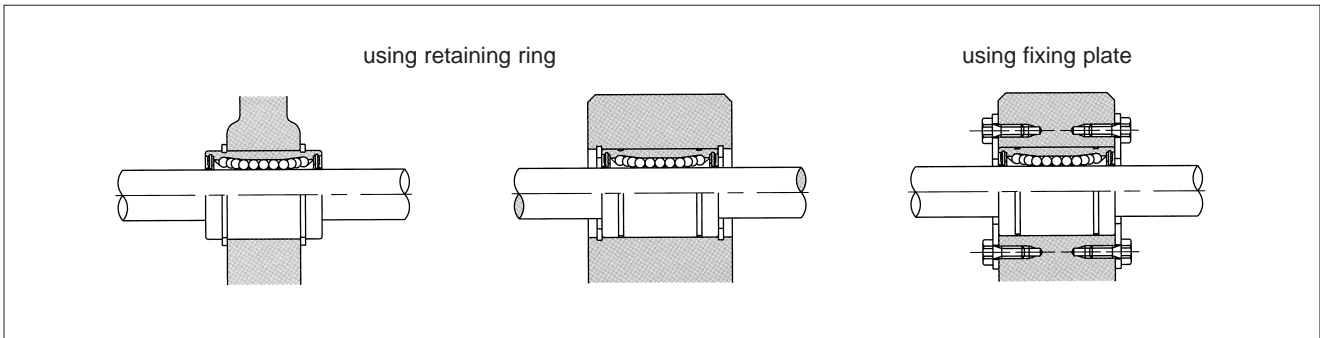


Figure D-5 Clearance Adjustable Type

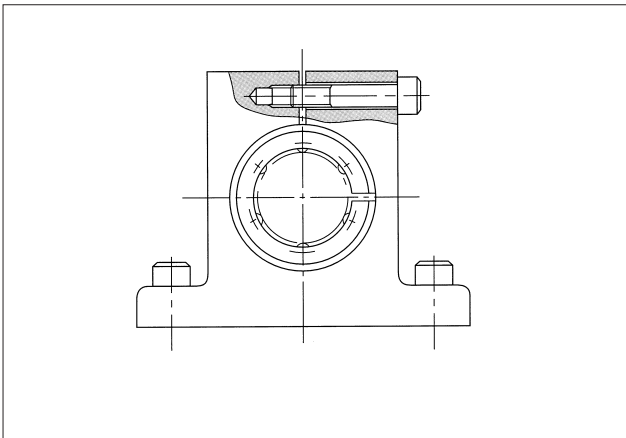


Figure D-6 Open Type


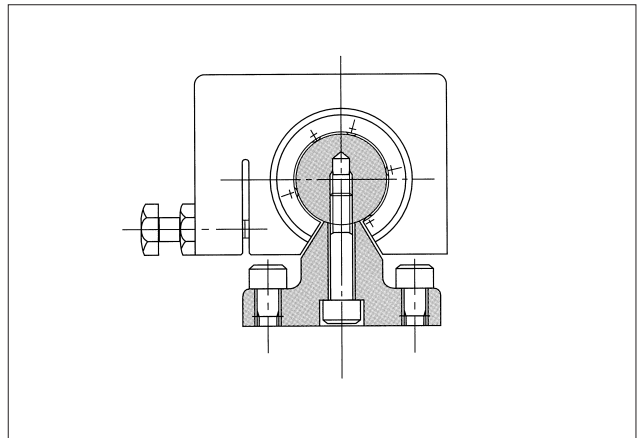


Figure D-7 Flange Type

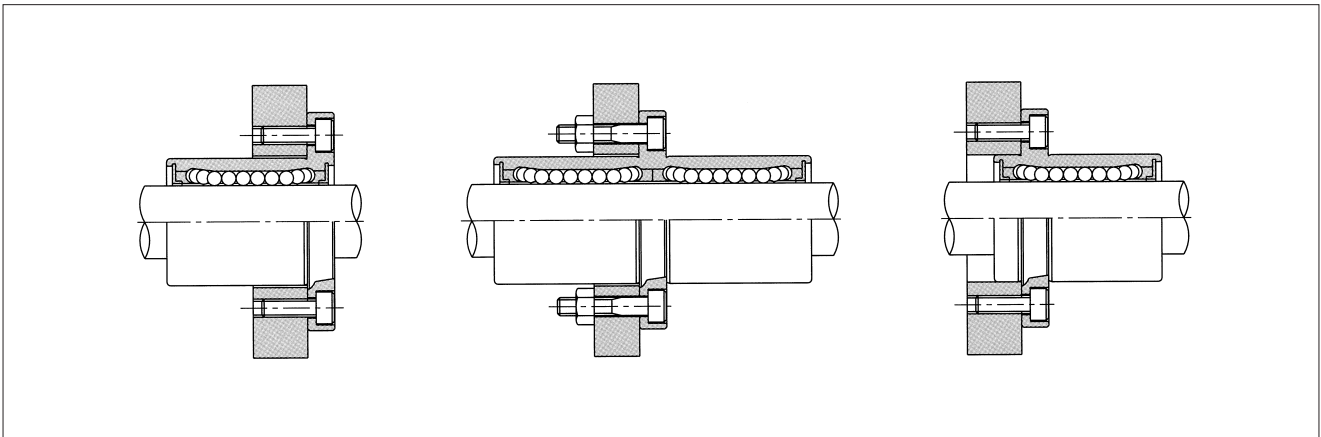

These figures illustrate the basics of flange installation.

Fit:

The normal clearances listed in Table D-8 are generally used for the NB slide bush. The transition fit is used to reduce clearance and increase accuracy. Matching the clearance as specified between bush and shaft is also possible.

The pre-load for the clearance adjustable and open type slide bush must be adjusted carefully so that excessive pre-load does not exceed limits, based on the radial clearances listed in the table.

The flange-type bush is generally inserted into an installation bore, which is slightly larger than the outer cylinder. However, if the outer cylinder is used as the pilot type, H7 tolerance is recommended.

The recommended clearances for the flange type are listed in Table D-9.

GM Flange type:

GM flange has a reference plane on one side only as Figure D-8a, do not use the other side as a reference plane. In case of using the pilot-end flange type, Figure D-8b shows that both sides can be used as a reference plane.

H7 is recommended for the housing bore tolerance.


Table D-8 Normal Clearances

series	accuracy grade	shaft		housing	
		clearance fit	transition fit	clearance fit	transition fit
GM	high	g6	h6	H7	—
GM-W	high	g6	—	H7	—
SM	high	g6	h6	H7	J7
	precision (P)	g5	h5	H6	J6
SM-W	high	g6	—	H7	—
KB	high	h6	j6	H7	J7
KB-W	high	h6	—	H7	—
SW	high	g6	h6	H7	J7
	precision (P)	g5	h5	H6	J6
SW-W	high	g6	—	H7	—

Table D-9 Recommended Fit for Flange Type Bush

series	shaft	
	clearance fit	transition fit
GMF-W	g6	—
SMF	g6	h6
SMF-W	g6	—
TRF	g6	—
KBF	h6	j6
KBF-W	h6	—
SWF	g6	h6
SWF-W	g6	—

Figure D-8 Installation of GM Flange type

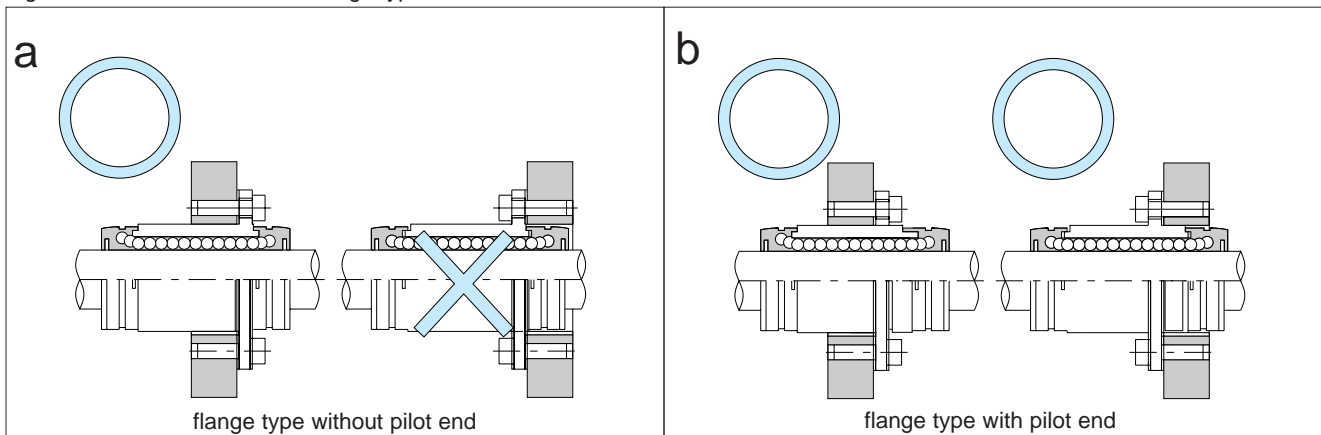


Notes on Installation:

When inserting a slide bush into a housing, carefully insert it by using a jig to apply a uniform pushing force at the end of the outer cylinder, as illustrated in Figure D-9. Motion performance may be diminished if an excessive force is applied to the resin portion of the outer cylinder, the side-ring, or the seal.

Ensure that all burrs are removed from the shaft and carefully insert the bush by aligning it with the center of the bore. The ball elements may drop out if excessive force is used during insertion.

When two or more shafts are used, the parallelism of the shafts will greatly affect the motion characteristics and life of the slide bush. The parallelism should be adjusted by moving the slide bush back and forth the length of stroke to check for freedom of movement before final fixing of shaft.

Figure D-9 Insertion of Slide Bush

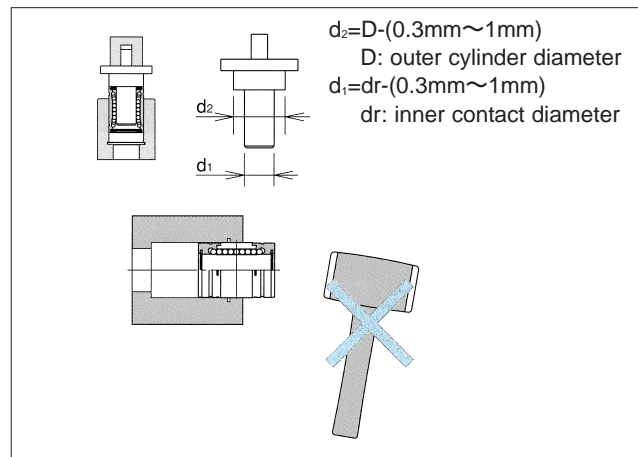

LUBRICATION

For a slide bush to continue operating accurately and have a long life, it must be lubricated on a regular basis. Anti-rust oil is applied to NB slide bush prior to shipment. When slide bushes are delivered, they should be cleaned with kerosene and dried, then a lubricant should be applied before usage.

Grease Lubricant:

Grease should be applied to the internal components of the slide bush. Grease should be periodically reapplied depending on the operating conditions. Reapplication may be done by adding the grease directly to the internal components or by using a mechanism similar to that as shown in Figure D-10. Lithium soap grease is recommended.

A special low dust generating grease for use in clean rooms is also available. (See page Eng.20) Contact NB for further details.

Oil Lubricant:

Oil can be applied directly to the shaft or by using a mechanism similar to that shown in Figure D-10. Turbine oil (ISO standard VG32-68) is recommended for highspeed applications.

Lubrication oil holes can be fabricated (see Figure D-11) in the center portion of the outer cylinder to simplify oil application. Contact NB for further details.

Figure D-10 Example of Mechanism for Applying Lubrication

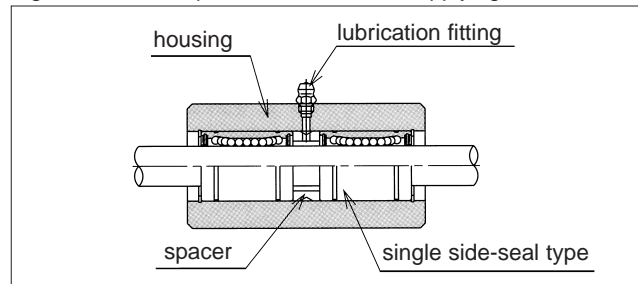


Figure D-11 Oil Hole (Custom Specification)


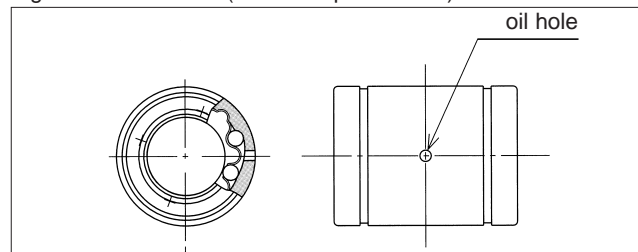


Figure D-12 Example of Dust Prevention

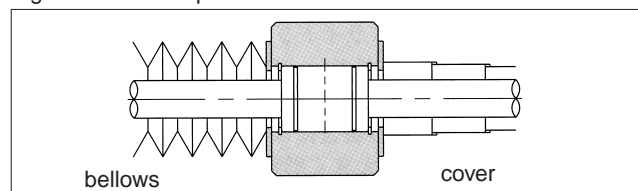


Dust Prevention

If foreign particles such as dust or grinding chips are introduced into the slide bush, they will disrupt the smooth circulation of the ball elements. The NB slide bush is available with seals as an option. Bellows or protective covers should be used under harsh environmental operating conditions.

NOTES ON HANDLING

The NB slide bush is a precision device and therefore should always be handled with care. The slide bush is not designed for rotational motion. When applications require both rotating and linear motions, a stroke bush (page F-2), slide rotary bush (page F-8), or rotary ball spline (page B-32) should be considered.

Figure D-13 Direction of Motion

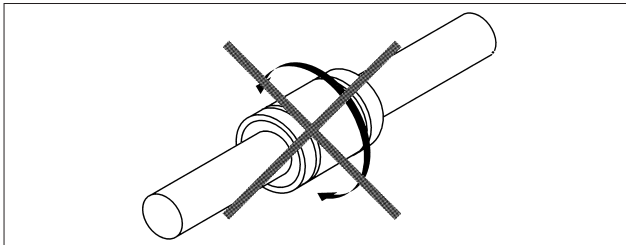

OTHER NOTES

● Flange Type Slide Bush with Surface-Treatment

The following standard surface treatments are available:


SK	electroless nickel plating
RD	Raydent treatment
SB	black oxide (excludes anti-corrosion specification)
SC	industrial chrome plating

※ In case of above treatment, tolerance of outer diameter might be difference to dimension table.

● Special Specifications

Contact NB for information for surface finish other than those listed above, oil hole (Figure D-11), or special mounting hole requirements for the flange-type bush. (Figure D-14)


Figure D-14 Examples of Special Installation Holes

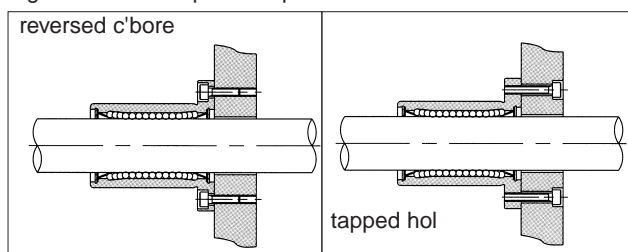

FELT SEAL

A felt seal may be used when lubrication is used with the NB slide bush. This felt seal improves the effect of the lubrication and increases the period between reapplications.

Figure D-15 Felt Seal

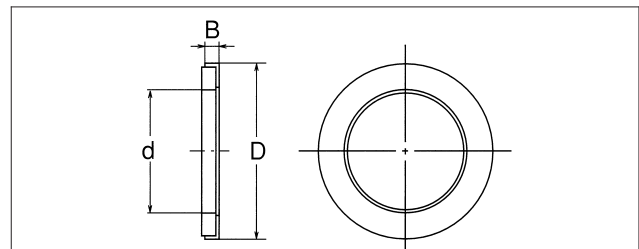


part number	major dimensions(mm)			applicable slide bush
	d	D	B	
FLM 6	6	12	2	SM 6/GM 6
FLM 8	8	15	2	SM 8/GM 8
FLM 10	10	19	3	SM10/GM10
FLM 12	12	21	3	SM12/GM12
FLM 13	13	23	3	SM13/GM13
FLM 16	16	28	4	SM16/GM16
FLM 20	20	32	4	SM20/GM20
FLM 25	25	40	5	SM25/GM25
FLM 30	30	45	5	SM30/GM30
FLM 35	35	52	5	SM 35
FLM 40	40	60	5	SM 40
FLM 50	50	80	10	SM 50
FLM 60	60	90	10	SM 60
FLM 80	80	120	10	SM 80
FLM100	100	150	10	SM100

Felt Seal Installation:



The felt seal should be installed as shown in Figure D-16.

Figure D-16 Example of Felt Seal Installation

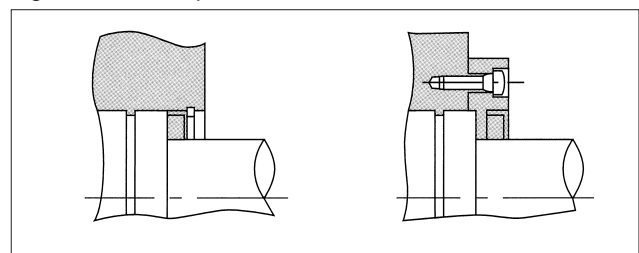

GM TYPE

— Single Type —

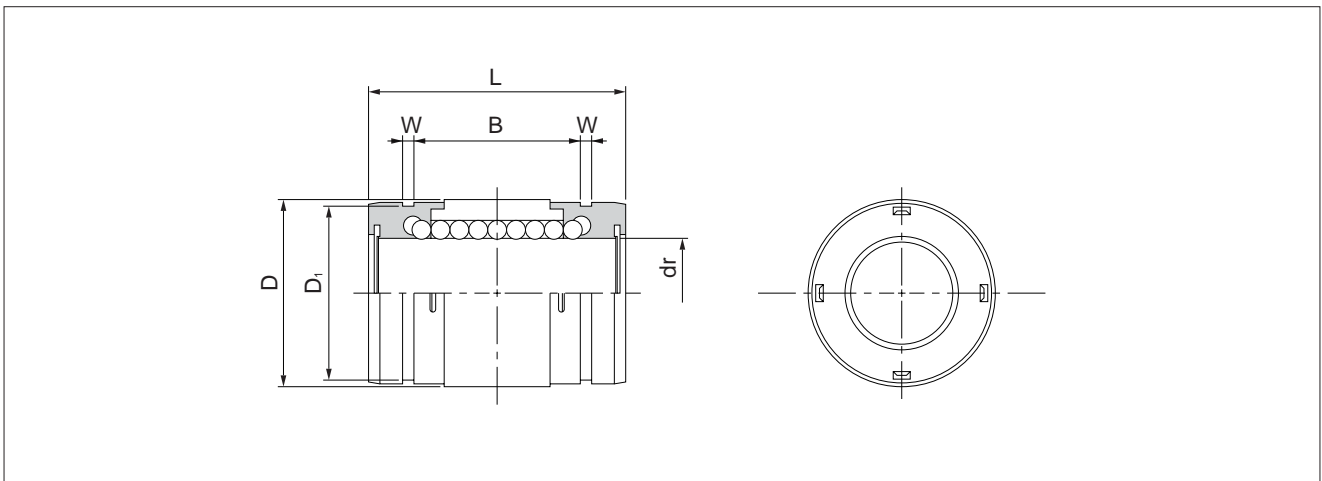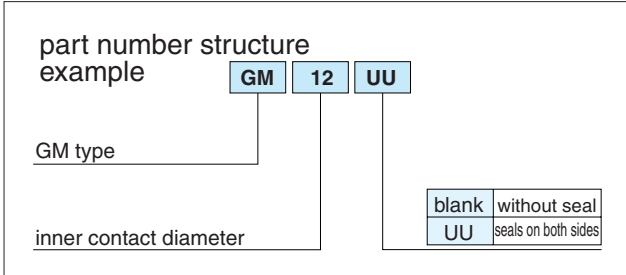




part number	number of ball circuits	major dimensions								basic load rating		mass
		dr		D		L	B	W	D ₁	dynamic C	static Co	
		mm	tolerance μm	mm	tolerance μm							
GM 6	4	6	0	12	0	19	11.3	1.1	11.5	206	265	5
GM 8	4	8		15	-11	24	15.3	1.1	14.3	274	392	10
GM10	4	10		19	-9	29	19.4	1.3	18	372	549	18
GM12	4	12		21		0	30	20.4	1.3	20	510	784
GM13	4	13	23	-13		32	20.4	1.3	22	510	784	27
GM16	4	16	28	-10	37	23.3	1.6	27	774	1,180	45	
GM20	6	20	32		0	42	27.3	1.6	30.5	882	1,370	70
GM25	6	25	40		-16	59	37.3	1.85	38	980	1,570	150
GM30	6	30	45	64		40.8	1.85	43	1,570	2,740	180	

GM-AJ type is available. Contact NB

1N \approx 0.102kgf

GM-W TYPE

— Double-Wide Type —

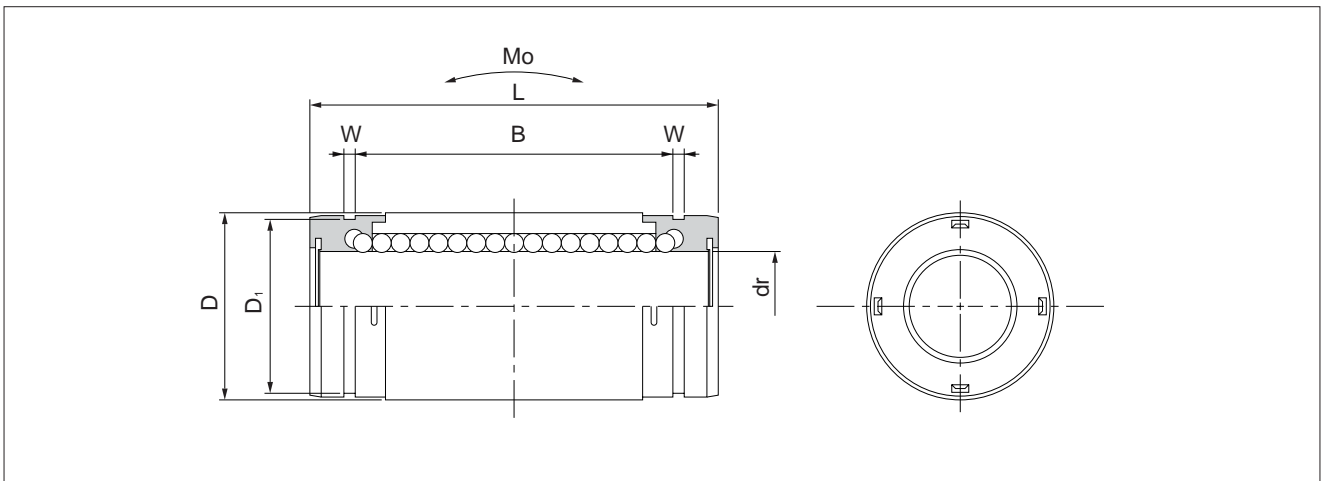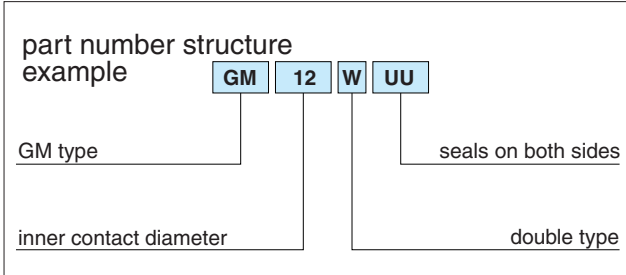
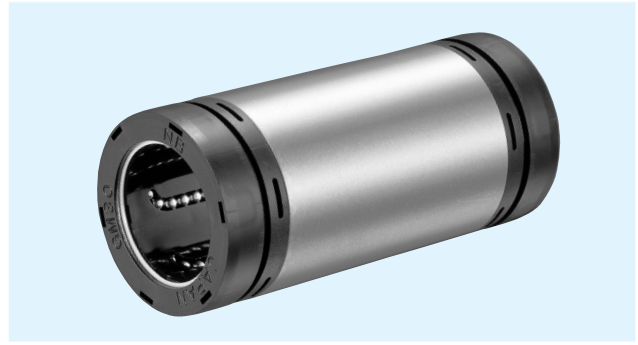


part number	number of ball circuits	major dimensions								basic load rating		allowable static moment Mo N·m	mass g
		dr		D		L	B	W	D ₁	dynamic C N	static Co N		
		mm	tolerance μm	mm	tolerance μm								
GM 6W UU	4	6	0	12	0	28	20.3	1.1	11.5	323	530	1.5	9
GM 8W UU	4	8	-10	15	-13	36	27.3	1.1	14.3	431	784	3.3	18
GM10W UU	4	10		19	0	41	31.4	1.3	18	588	1,100	5.0	31
GM12W UU	4	12		21	0	46	36.4	1.3	20	813	1,570	7.6	42
GM13W UU	4	13	-12	23	-16	48	36.4	1.3	22	813	1,570	8.1	50
GM16W UU	4	16		28	0	53	39.3	1.6	27	1,230	2,350	13.8	76
GM20W UU	6	20		32	0	65	50.3	1.6	30.5	1,400	2,740	20.0	130
GM25W UU	6	25	-19	40	-19	91	69.3	1.85	38	1,560	3,140	34.8	280
GM30W UU	6	30		45		99	75.8	1.85	43	2,490	5,490	57.5	334


1N ≅ 0.102kgf 1N·m ≅ 0.102kgf·m

GMF-W TYPE

— Round Flange Double-Wide Type —

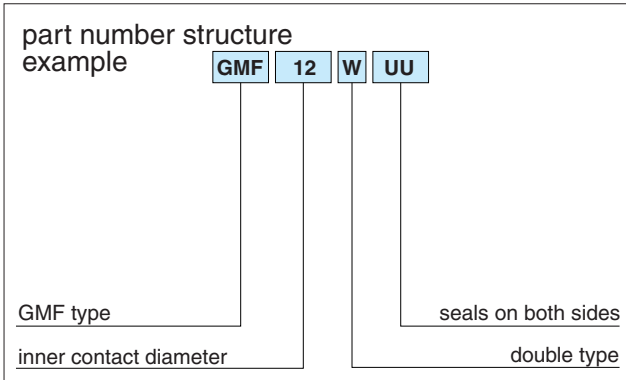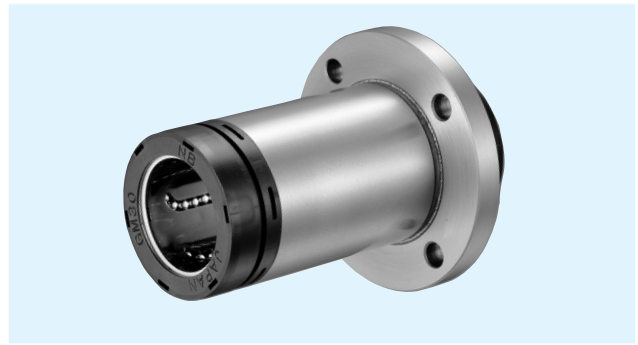

part number	number of ball circuits	major dimensions					
		dr		D		L	H
		mm	tolerance μm	mm	tolerance μm		
GMF 6W UU	4	6	0 -10	12	0	28	17.8
GMF 8W UU	4	8		15	-13	36	25.1
GMF10W UU	4	10		19	0 -16	41	28.2
GMF12W UU	4	12		21		46	34.2
GMF13W UU	4	13		23		48	34.7
GMF16W UU	4	16	28	53	38.3		
GMF20W UU	6	20	0 -12	32	0 -19	65	49.2
GMF25W UU	6	25		40		91	70.5
GMF30W UU	6	30		45		99	74.3


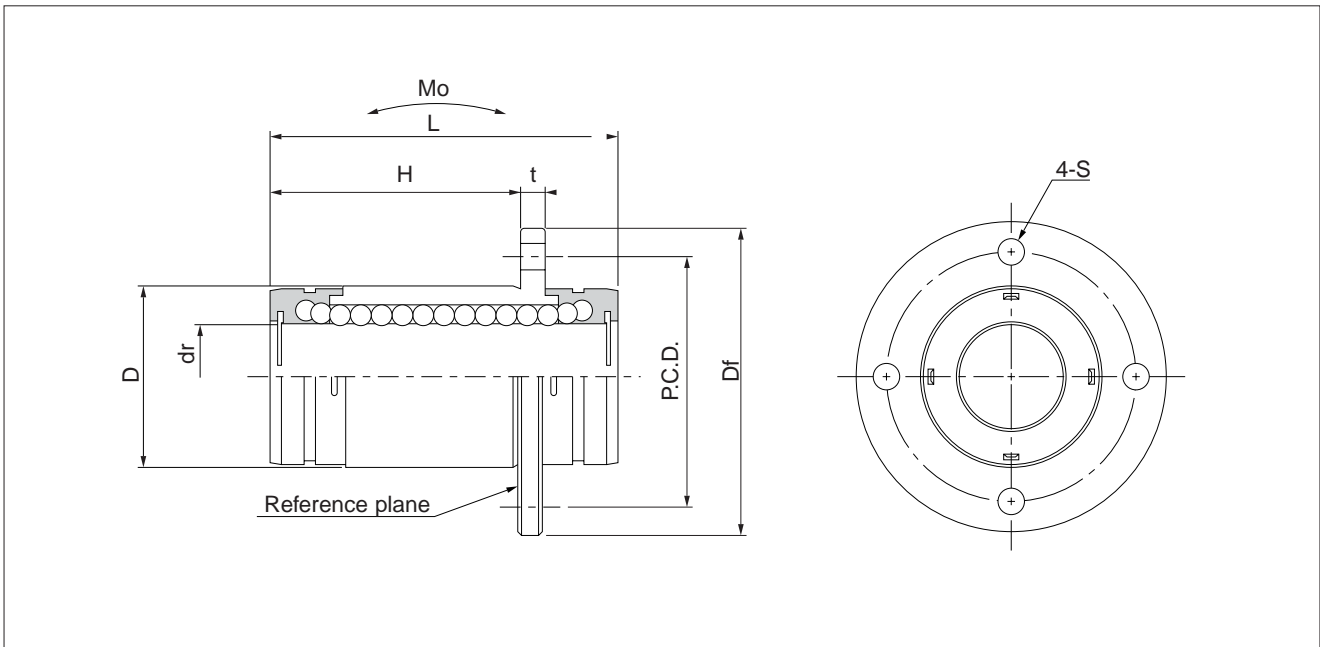


flange				perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
Df mm	t mm	P.C.D mm	S mm		dynamic C N	static C_o N			
28	4	20	3.5	15	323	530	1.5	25	6
32	4	24	3.5		431	784	3.3	38	8
40	4	29	4.5		588	1,100	5.0	62	10
42	4	32	4.5		813	1,570	7.6	75	12
43	4	33	4.5		813	1,570	8.1	83	13
48	4	38	4.5		1,230	2,350	13.8	115	16
54	5	43	5.5	20	1,400	2,740	20.0	188	20
62	5	51	5.5		1,560	3,140	34.8	350	25
74	8	60	6.6		2,490	5,490	57.5	502	30


1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

GMK-W TYPE

— Square Flange Double-Wide Type —

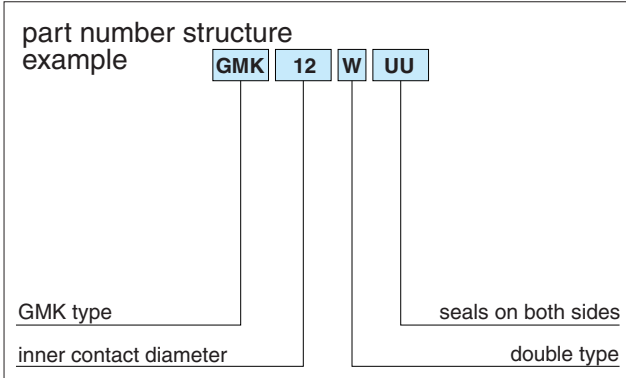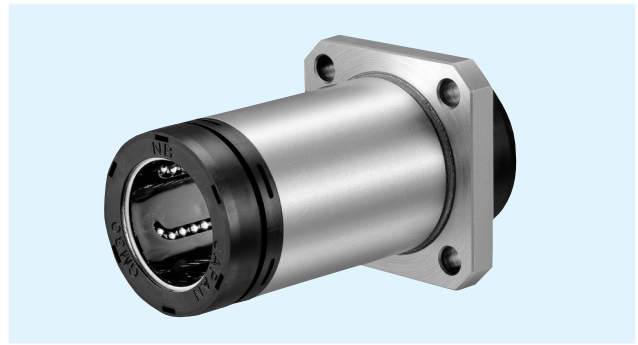

part number	number of ball circuits	major dimensions					
		dr		D		L	H
		mm	tolerance μm	mm	tolerance μm		
GMK 6W UU	4	6	0 -10	12	0	28	17.8
GMK 8W UU	4	8		15	-13	36	25.1
GMK10W UU	4	10		19	0 -16	41	28.2
GMK12W UU	4	12		21		46	34.2
GMK13W UU	4	13		23		48	34.7
GMK16W UU	4	16	28	53	38.3		
GMK20W UU	6	20	0 -12	32	0	65	49.2
GMK25W UU	6	25		40	91	70.5	
GMK30W UU	6	30		45	-19	99	74.3


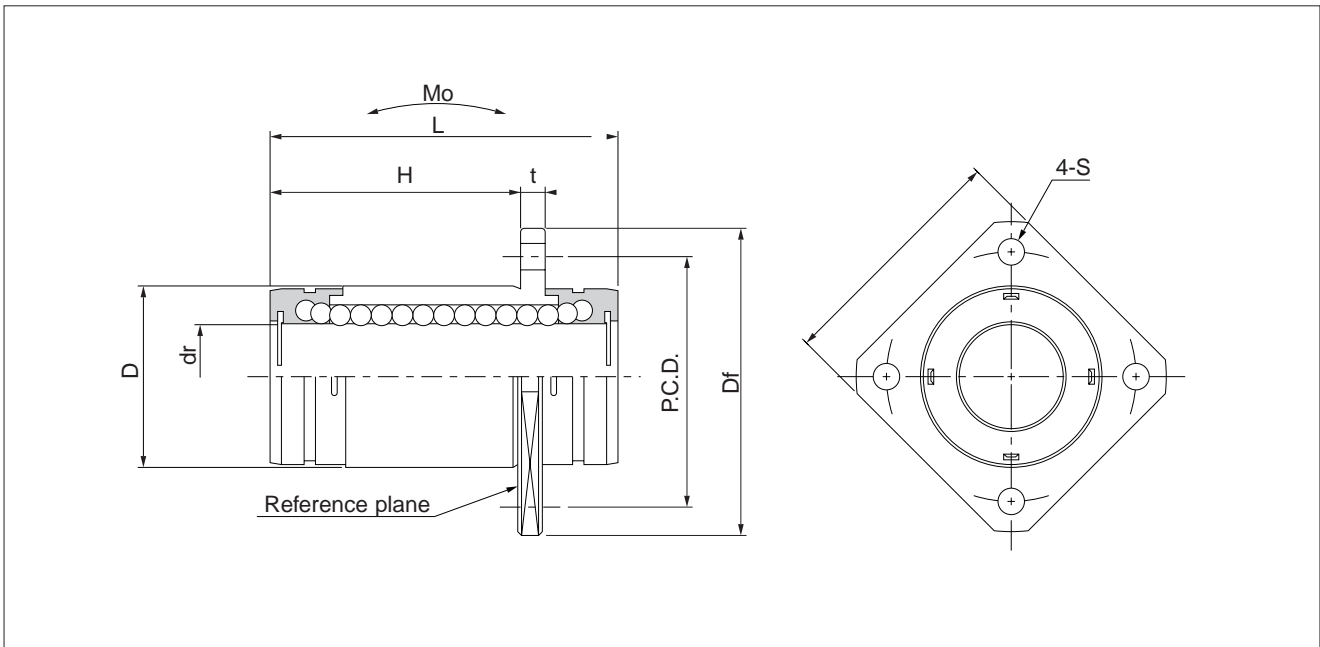


flange					perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
Df mm	t mm	P.C.D mm	K mm	S mm		dynamic C N	static Co N			
28	4	20	22	3.5	15	323	530	1.5	20	6
32	4	24	25	3.5		431	784	3.3	32	8
40	4	29	30	4.5		588	1,100	5.0	50	10
42	4	32	32	4.5		813	1,570	7.6	63	12
43	4	33	34	4.5		813	1,570	8.1	72	13
48	4	38	37	4.5		1,230	2,350	13.8	99	16
54	5	43	42	5.5	20	1,400	2,740	20.0	165	20
62	5	51	50	5.5		1,560	3,140	34.8	325	25
74	8	60	58	6.6		2,490	5,490	57.5	437	30


1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

GMT-W TYPE

— Two Side Cut Double-Wide Flange Type —

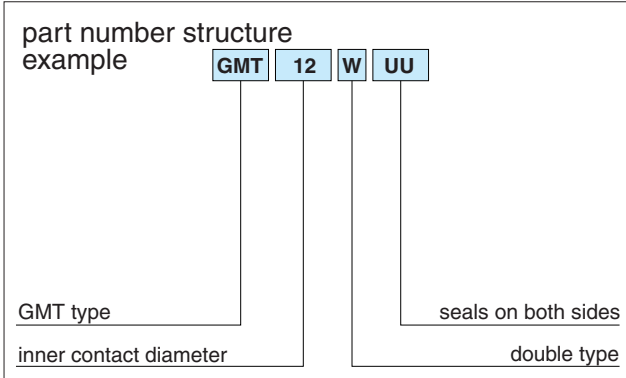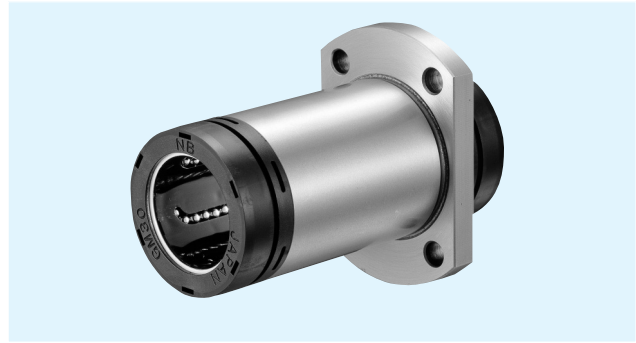

part number	number of ball circuits	major dimensions					
		dr		D		L	H
		mm	tolerance μm	mm	tolerance μm		
GMT 6W UU	4	6	0 -10	12	0	28	17.8
GMT 8W UU	4	8		15	-13	36	25.1
GMT10W UU	4	10		19	0 -16	41	28.2
GMT12W UU	4	12		21		46	34.2
GMT13W UU	4	13		23		48	34.7
GMT16W UU	4	16	28	53	38.3		
GMT20W UU	6	20	0 -12	32	0	65	49.2
GMT25W UU	6	25		40	-19	91	70.5
GMT30W UU	6	30		45		99	74.3

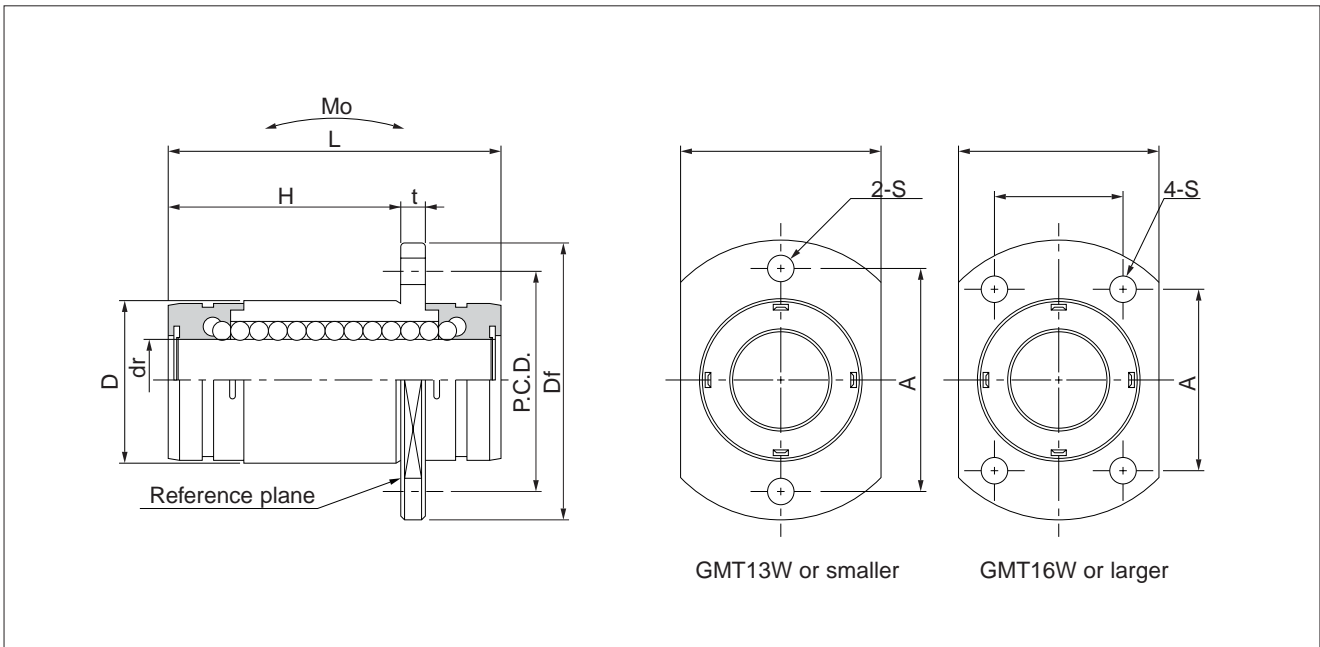


flange						perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
Df mm	t mm	W mm	A mm	F mm	S mm		C N	Co N			
28	4	18	20	—	3.5	15	323	530	1.5	21	6
32	4	21	24	—	3.5		431	784	3.3	33	8
40	4	25	29	—	4.5		588	1,100	5.0	52	10
42	4	27	32	—	4.5		813	1,570	7.6	65	12
43	4	29	33	—	4.5		813	1,570	8.1	74	13
48	4	34	31	22	4.5		1,230	2,350	13.8	104	16
54	5	38	36	24	5.5	20	1,400	2,740	20.0	171	20
62	5	46	40	32	5.5		1,560	3,140	34.8	331	25
74	8	51	49	35	6.6		2,490	5,490	57.5	447	30

1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m


GMF-W-E TYPE

– Round Flange Double-Wide Type with pilot end–

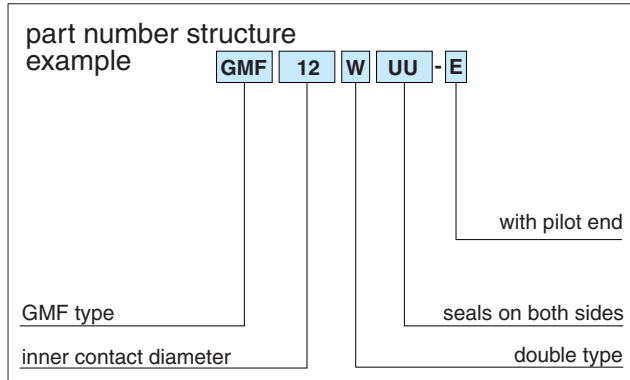

part number	number of ball circuits	major dimensions							
		dr		D		L	B	G	E
		mm	tolerance μm	mm	tolerance μm				
GMF 6W UU-E	4	6	0 -10	12	0	28	13.8	7.6	4
GMF 8W UU-E	4	8		15	-13	36	21.1	14.2	4
GMF10W UU-E	4	10		19	0 -16	41	24.2	15.4	4
GMF12W UU-E	4	12		21		46	30.2	22.4	4
GMF13W UU-E	4	13		23		48	30.65	21.3	4
GMF16W UU-E	4	16	28	0 -12	53	33.3	22.6	5	
GMF20W UU-E	6	20	32		65	44.2	33.4	5	
GMF25W UU-E	6	25	40		91	65.5	50.0	5	
GMF30W UU-E	6	30	45	-19	99	69.3	52.6	5	

Both side of flange are reference plane.


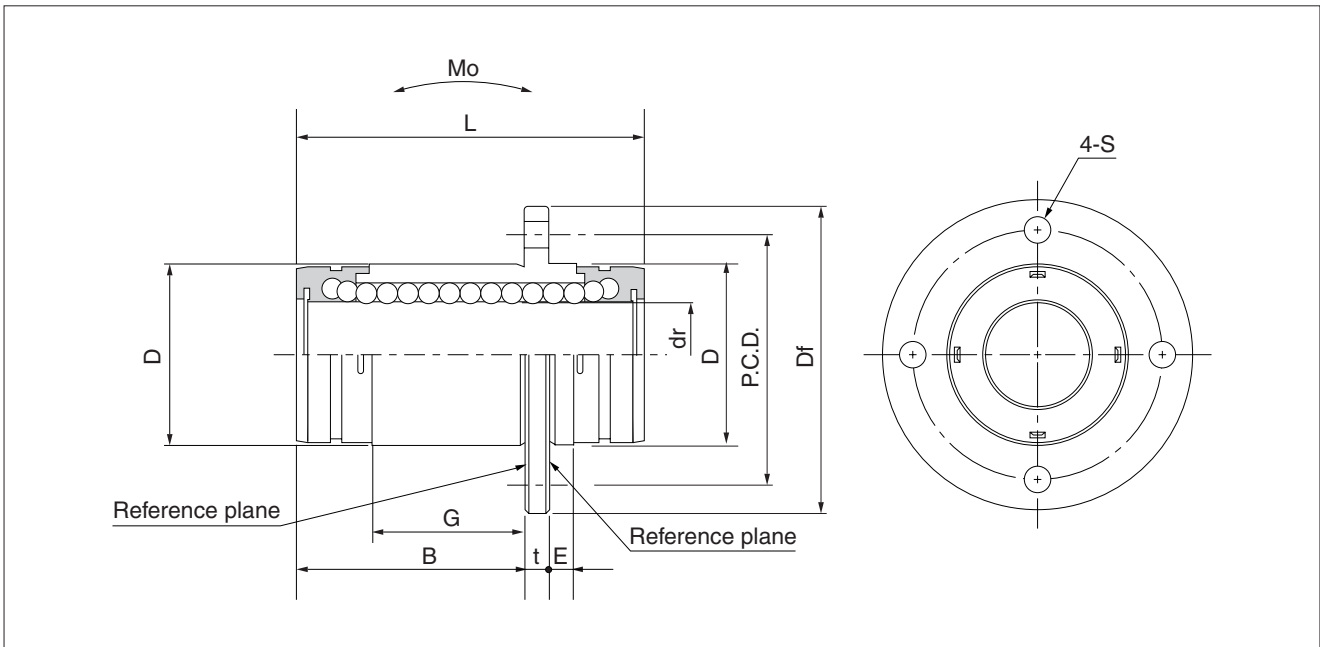


flange				perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
Df mm	t mm	P.C.D mm	S mm		C N	Co N			
28	4	20	3.5	15	323	530	1.5	25	6
32	4	24	3.5		431	784	3.3	38	8
40	4	29	4.5		588	1,100	5.0	62	10
42	4	32	4.5		813	1,570	7.6	75	12
43	4	33	4.5		813	1,570	8.1	83	13
48	4	38	4.5		1,230	2,350	13.8	115	16
54	5	43	5.5	20	1,400	2,740	20.0	188	20
62	5	51	5.5		1,560	3,140	34.8	350	25
74	8	60	6.6		2,490	5,490	57.5	502	30

1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m


GMK-W-E TYPE

– Square Flange Double-Wide Type with pilot end–

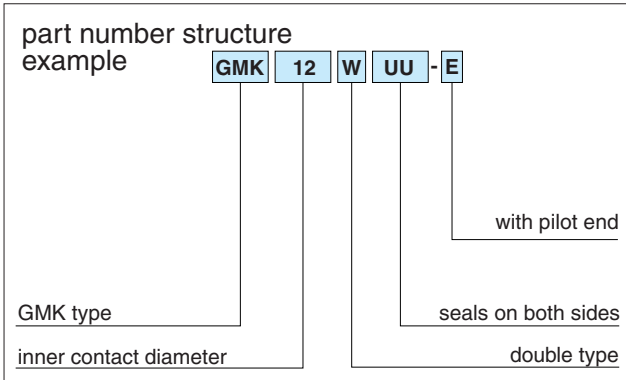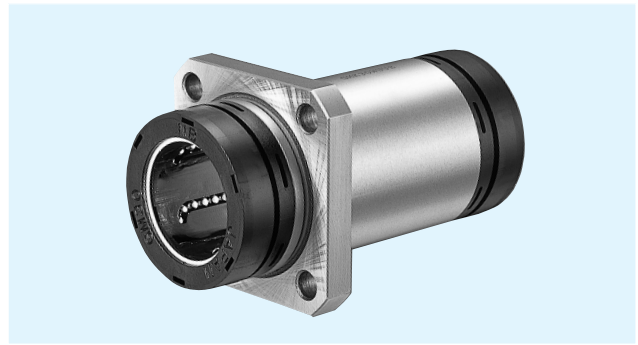

part number	number of ball circuits	major dimensions							
		dr		D		L	B	G	E
		mm	tolerance μm	mm	tolerance μm				
GMK 6W UU-E	4	6	0 -10	12	0	28	13.8	7.6	4
GMK 8W UU-E	4	8		15	-13	36	21.1	14.2	4
GMK10W UU-E	4	10		19	0 -16	41	24.2	15.4	4
GMK12W UU-E	4	12		21		46	30.2	22.4	4
GMK13W UU-E	4	13		23		48	30.65	21.3	4
GMK16W UU-E	4	16	28	0 -12	53	33.3	22.6	5	
GMK20W UU-E	6	20	32		65	44.2	33.4	5	
GMK25W UU-E	6	25	40		91	65.5	50.0	5	
GMK30W UU-E	6	30	45	-19	99	69.3	52.6	5	

Both side of flange are reference plane.


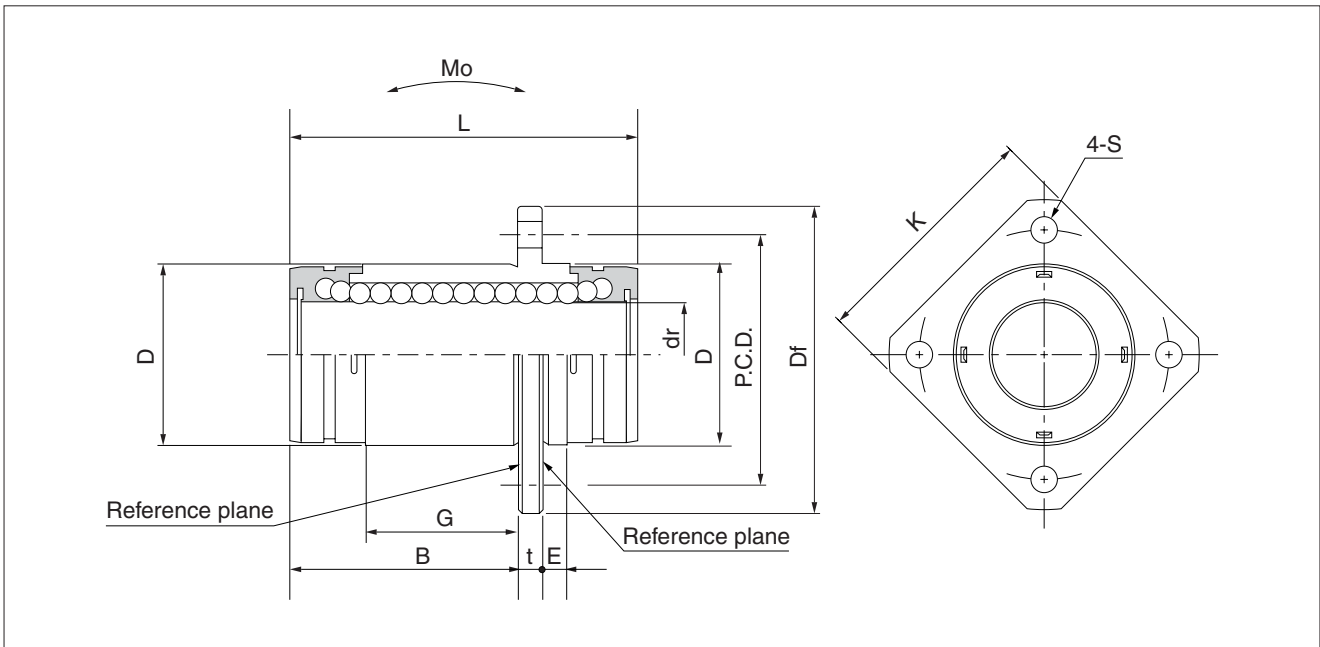


flange					perpen- dicularity μm	basic load rating		allowable static moment Mo $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
D_f mm	t mm	P.C.D. mm	K mm	S mm		dynamic C N	static Co N			
28	4	20	22	3.5	15	323	530	1.5	20	6
32	4	24	25	3.5		431	784	3.3	32	8
40	4	29	30	4.5		588	1,100	5.0	50	10
42	4	32	32	4.5		813	1,570	7.6	63	12
43	4	33	34	4.5		813	1,570	8.1	72	13
48	4	38	37	4.5		1,230	2,350	13.8	99	16
54	5	43	42	5.5	20	1,400	2,740	20.0	165	20
62	5	51	50	5.5		1,560	3,140	34.8	325	25
74	8	60	58	6.6		2,490	5,490	57.5	437	30

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m


GMT-W-E TYPE

– Two Side Cut Double-Wide Flange Type with pilot end–

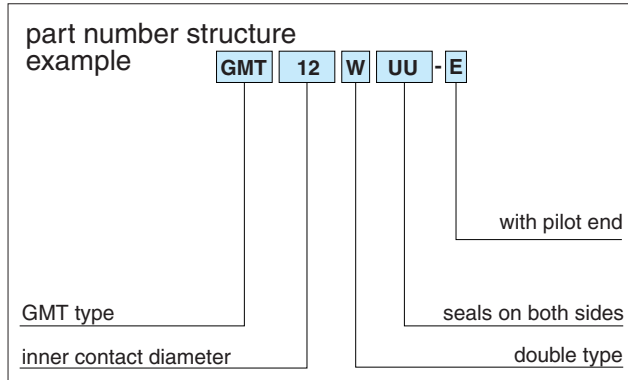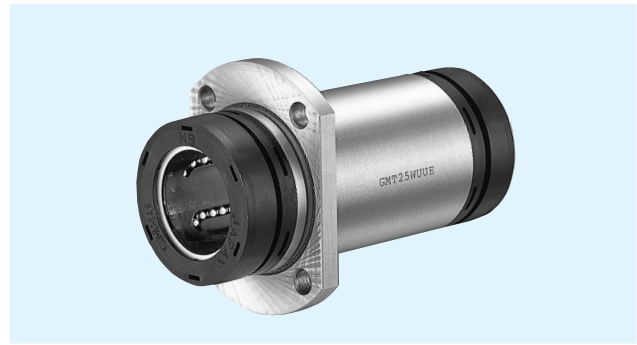

part number	number of ball circuits	major dimensions							
		dr		D		L	B	G	E
		mm	tolerance μm	mm	tolerance μm				
GMT 6W UU-E	4	6	0 -10	12	0	28	13.8	7.6	4
GMT 8W UU-E	4	8		15	-13	36	21.1	14.2	4
GMT10W UU-E	4	10		19	0 -16	41	24.2	15.4	4
GMT12W UU-E	4	12		21		46	30.2	22.4	4
GMT13W UU-E	4	13		23		48	30.65	21.3	4
GMT16W UU-E	4	16		28	53	33.3	22.6	5	
GMT20W UU-E	6	20	0 -12	32	0	65	44.2	33.4	5
GMT25W UU-E	6	25		40		91	65.5	50.0	5
GMT30W UU-E	6	30		45	-19	99	69.3	52.6	5

Both side of flange are reference plane.

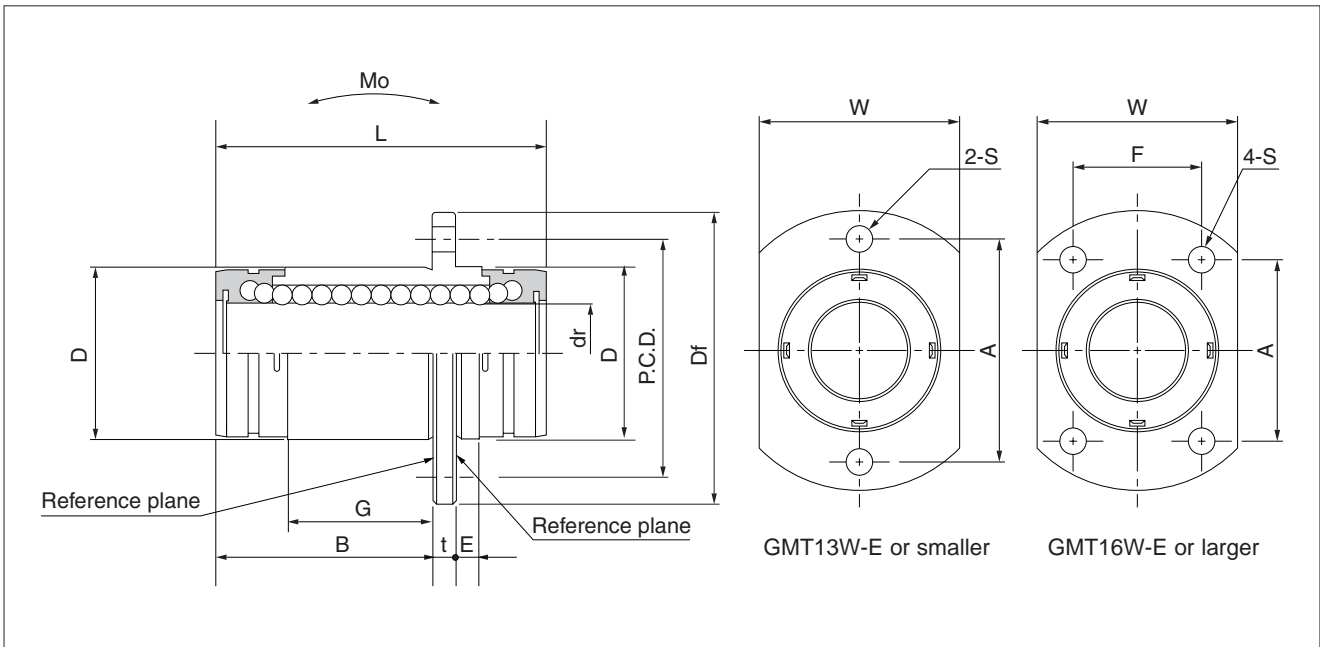


flange						perpendicularity μm	basic load rating		allowable static moment M_o $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
Df mm	t mm	W mm	A mm	F mm	S mm		C N	Co N			
28	4	18	20	—	3.5	15	323	530	1.5	21	6
32	4	21	24	—	3.5		431	784	3.3	33	8
40	4	25	29	—	4.5		588	1,100	5.0	52	10
42	4	27	32	—	4.5		813	1,570	7.6	65	12
43	4	29	33	—	4.5		813	1,570	8.1	74	13
48	4	34	31	22	4.5		1,230	2,350	13.8	104	16
54	5	38	36	24	5.5	20	1,400	2,740	20.0	171	20
62	5	46	40	32	5.5		1,560	3,140	34.8	331	25
74	8	51	49	35	6.6		2,490	5,490	57.5	447	30

1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m


SM TYPE

— Standard Type —

This type is a metric dimension series widely used in Japan and other countries.

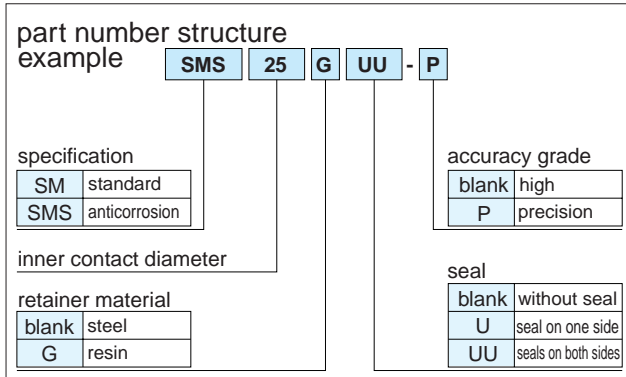

part number				number of ball circuits	dr mm	dr tolerance μm		D	
standard		anticorrosion				precision	high	mm	tolerance μm
steel retainer	resin retainer	stainless retainer	resin retainer						
SM 3	SM 3G	SMS 3	SMS 3G	4	3	0	0	7	0
SM 4	SM 4G	SMS 4	SMS 4G	4	4	- 5	- 8	8	- 9
SM 5	SM 5G	SMS 5	SMS 5G	4	5			10	
SM 6	SM 6G	SMS 6	SMS 6G	4	6			12	0
SM 8s	SM8sG	SMS8s	SMS8sG	4	8			15	- 11
SM 8	SM 8G	SMS 8	SMS 8G	4	8			15	
SM 10	SM10G	SMS10	SMS10G	4	10	0	0	19	
SM 12	SM12G	SMS12	SMS12G	4	12	- 6	- 9	21	0
SM 13	SM13G	SMS13	SMS13G	4	13			23	- 13
SM 16	SM16G	SMS16	SMS16G	4	16			28	
SM 20	SM20G	SMS20	SMS20G	5	20	0	0	32	0
SM 25	SM25G	SMS25	SMS25G	6	25	- 7	- 10	40	- 16
SM 30	SM30G	SMS30	SMS30G	6	30			45	
SM 35	SM35G	SMS35	SMS35G	6	35	0	0	52	0
SM 40	SM40G	SMS40	SMS40G	6	40	- 8	- 12	60	- 19
SM 50	SM50G	SMS50	SMS50G	6	50			80	
SM 60	SM60G	SMS60	SMS60G	6	60	0	0	90	0
SM 80	SM80G	SMS80	SMS80G	6	80	- 9	- 15	120	- 22
SM100	-	-	-	6	100	0	0	150	0
SM120	-	-	-	8	120	- 10	- 20	180	- 25
SM150	-	-	-	8	150	0/- 13	0/- 25	210	0/- 29

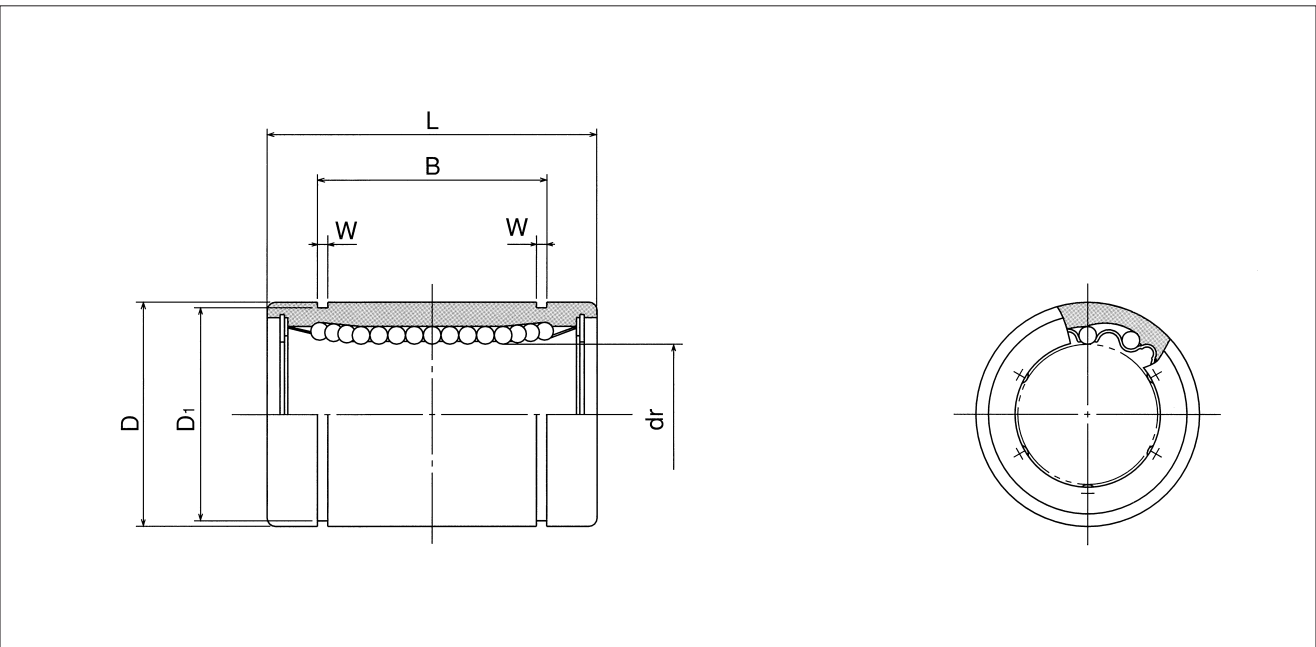


major dimensions						eccentricity		radial clearance (maximum) μm	basic load rating		mass g	shaft diameter mm	
L	B	W	D ₁	precision	high	dynamic C N	static C ₀ N						
mm	tolerance mm	mm	tolerance mm	mm	mm	μm	μm	μm	N	N	g	mm	
10	0	—	—	—	—	4	8	— 3	69	105	1.4	3	
12	-0.12	—	—	—	—				88	127	2.0	4	
15		10.2	—	—	—				167	206	4.0	5	
19	0	13.5	0	1.1	9.6	8	12	— 4	206	265	8.5	6	
17		11.5		1.1	11.5				176	216	11	8	
24		17.5		1.1	14.3				274	392	17	8	
29		22		1.3	18				372	549	36	10	
30		-0.2		23	1.3				20	510	784	42	12
32	23		1.3	22	510	784	49	13					
37	26.5		1.6	27	774	1,180	76	16					
42	0	30.5	0	1.6	30.5	10	15	— 6	882	1,370	100	20	
59		41		1.85	38				980	1,570	240	25	
64		44.5		1.85	43				1,570	2,740	270	30	
70	-0.3	49.5	0	2.1	49	12	20	- 8	1,670	3,140	425	35	
80		60.5		2.1	57				-10	2,160	4,020	654	40
100		74		2.6	76.5				-13	3,820	7,940	1,700	50
110	0	85	0	3.15	86.5	17	25	- 20	4,700	10,000	2,000	60	
140		105.5		4.15	116				7,350	16,000	4,520	80	
175		125.5		4.15	145				14,100	34,800	8,600	100	
200	-0.4	158.6	-0.4	4.15	175	20	30	- 25	16,400	40,000	15,000	120	
240		170.6		5.15	204				25	40	21,100	54,300	20,250

1N≐0.102kgf

SM-AJ TYPE


— Clearance-Adjustable Type —

This type is a metric dimension series widely used in Japan and other countries.

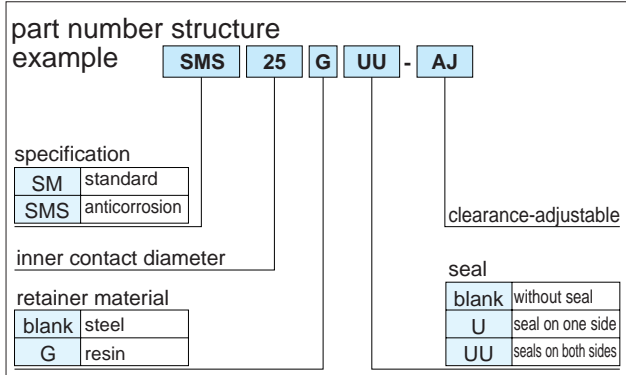

part number				number of ball circuits	dr		D	
standard		anticorrosion			mm	tolerance*	mm	tolerance*
steel retainer	resin retainer	stainless retainer	resin retainer			μm		μm
—	SM 6G-AJ	—	SMS 6G-AJ	4	6	0	12	0
—	SM8sG-AJ	—	SMS8sG-AJ	4	8		15	-11
—	SM 8G-AJ	—	SMS 8G-AJ	4	8		15	
—	SM10G-AJ	—	SMS10G-AJ	4	10		19	-13
SM 12-AJ	SM12G-AJ	SMS12-AJ	SMS12G-AJ	4	12	21		
SM 13-AJ	SM13G-AJ	SMS13-AJ	SMS13G-AJ	4	13	23		
SM 16-AJ	SM16G-AJ	SMS16-AJ	SMS16G-AJ	4	16	28	0	
SM 20-AJ	SM20G-AJ	SMS20-AJ	SMS20G-AJ	5	20	32		
SM 25-AJ	SM25G-AJ	SMS25-AJ	SMS25G-AJ	6	25	40	-16	
SM 30-AJ	SM30G-AJ	SMS30-AJ	SMS30G-AJ	6	30	45		
SM 35-AJ	SM35G-AJ	SMS35-AJ	SMS35G-AJ	6	35	52	0	
SM 40-AJ	SM40G-AJ	SMS40-AJ	SMS40G-AJ	6	40	60		
SM 50-AJ	SM50G-AJ	SMS50-AJ	SMS50G-AJ	6	50	80	-19	
SM 60-AJ	SM60G-AJ	SMS60-AJ	SMS60G-AJ	6	60	90		
SM 80-AJ	SM80G-AJ	—	—	6	80	-15	120	-22
SM100-AJ	—	—	—	6	100	0	150	0
SM120-AJ	—	—	—	8	120	-20	180	-25
SM150-AJ	—	—	—	8	150	0/-25	210	0/-29

* Accuracy is measured prior to machining clearance slot.

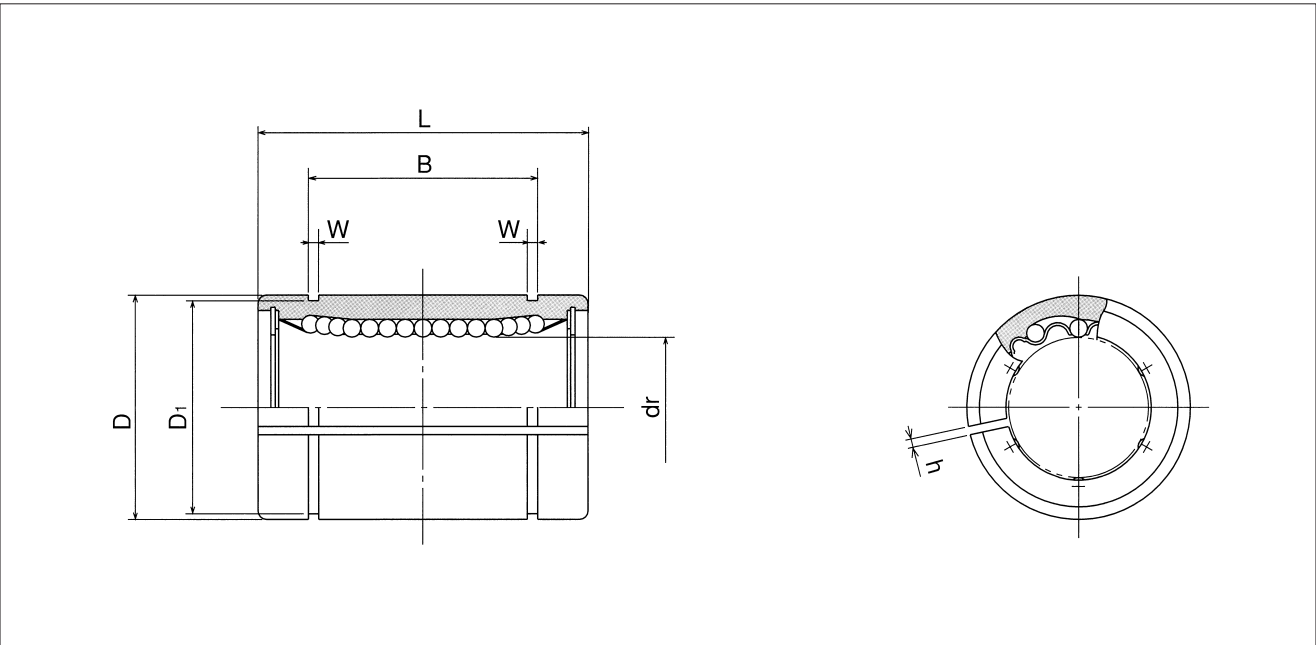



major dimensions							eccentricity* μm	basic load rating		mass g	shaft diameter mm		
L mm	tolerance mm	B mm	tolerance mm	W mm	D ₁ mm	h mm		dynamic	static				
								C N	C ₀ N				
19	0 -0.2	13.5	0 -0.2	1.1	11.5	1	12	206	265	7.5	6		
17		11.5		1.1	14.3	1		176	216			10	8
24		17.5		1.1	14.3	1		274	392			14.7	8
29		22		1.3	18	1		372	549			29	10
30		23		1.3	20	1.5		510	784			41	12
32		23		1.3	22	1.5		510	784			48	13
37		26.5		1.6	27	1.5		774	1,180			75	16
42		30.5		1.6	30.5	1.5		882	1,370			98	20
59	0 -0.3	41	0 -0.3	1.85	38	2	15	980	1,570	237	25		
64		44.5		1.85	43	2.5		1,570	2,740			262	30
70		49.5		2.1	49	2.5		1,670	3,140			420	35
80		60.5		2.1	57	3		2,160	4,020			640	40
100	-0.3	74	-0.3	2.6	76.5	3	20	3,820	7,940	1,680	50		
110		85		3.15	86.5	3		4,700	10,000			1,980	60
140		105.5		4.15	116	3		7,350	16,000			4,400	80
175	0 -0.4	125.5	0 -0.4	4.15	145	3	25	14,100	34,800	8,540	100		
200		158.6		4.15	175	3		16,400	40,000			14,900	120
240		170.6		5.15	204	3		21,100	54,300			20,150	150
									40				

1N≐0.102kgf

SM-OP TYPE


— Open Type —

This type is a metric dimension series widely used in Japan and other countries.

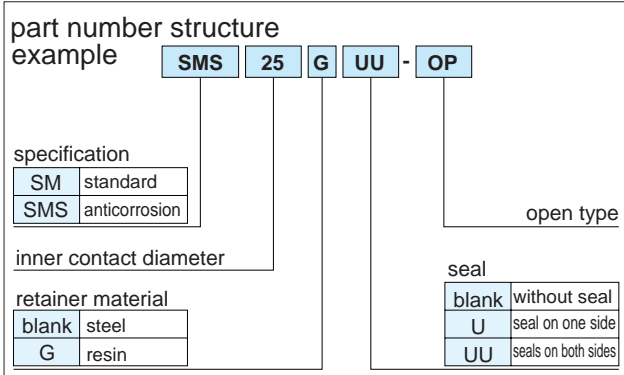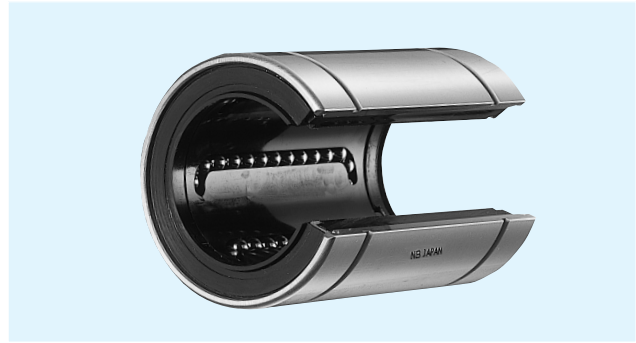

part number				number of ball circuits	dr			
standard		anticorrosion			mm	tolerance* μm	D	
steel retainer	resin retainer	stainless retainer	resin retainer				mm	tolerance* μm
—	SM10G-OP	—	SMS10G-OP	3	10		19	
SM 12-OP	SM12G-OP	SMS12-OP	SMS12G-OP	3	12	0	21	0
SM 13-OP	SM13G-OP	SMS13-OP	SMS13G-OP	3	13	-9	23	-13
SM 16-OP	SM16G-OP	SMS16-OP	SMS16G-OP	3	16		28	
SM 20-OP	SM20G-OP	SMS20-OP	SMS20G-OP	4	20	0	32	0
SM 25-OP	SM25G-OP	SMS25-OP	SMS25G-OP	5	25	-10	40	-16
SM 30-OP	SM30G-OP	SMS30-OP	SMS30G-OP	5	30		45	
SM 35-OP	SM35G-OP	SMS35-OP	SMS35G-OP	5	35	0	52	0
SM 40-OP	SM40G-OP	SMS40-OP	SMS40G-OP	5	40	-12	60	-19
SM 50-OP	SM50G-OP	SMS50-OP	SMS50G-OP	5	50		80	
SM 60-OP	SM60G-OP	SMS60-OP	SMS60G-OP	5	60	0	90	0
SM 80-OP	SM80G-OP	—	—	5	80	-15	120	-22
SM100-OP	—	—	—	5	100	0	150	0
SM120-OP	—	—	—	6	120	-20	180	-25
SM150-OP	—	—	—	6	150	0/-25	210	0/-29

* Accuracy is measured prior to machining open slot.

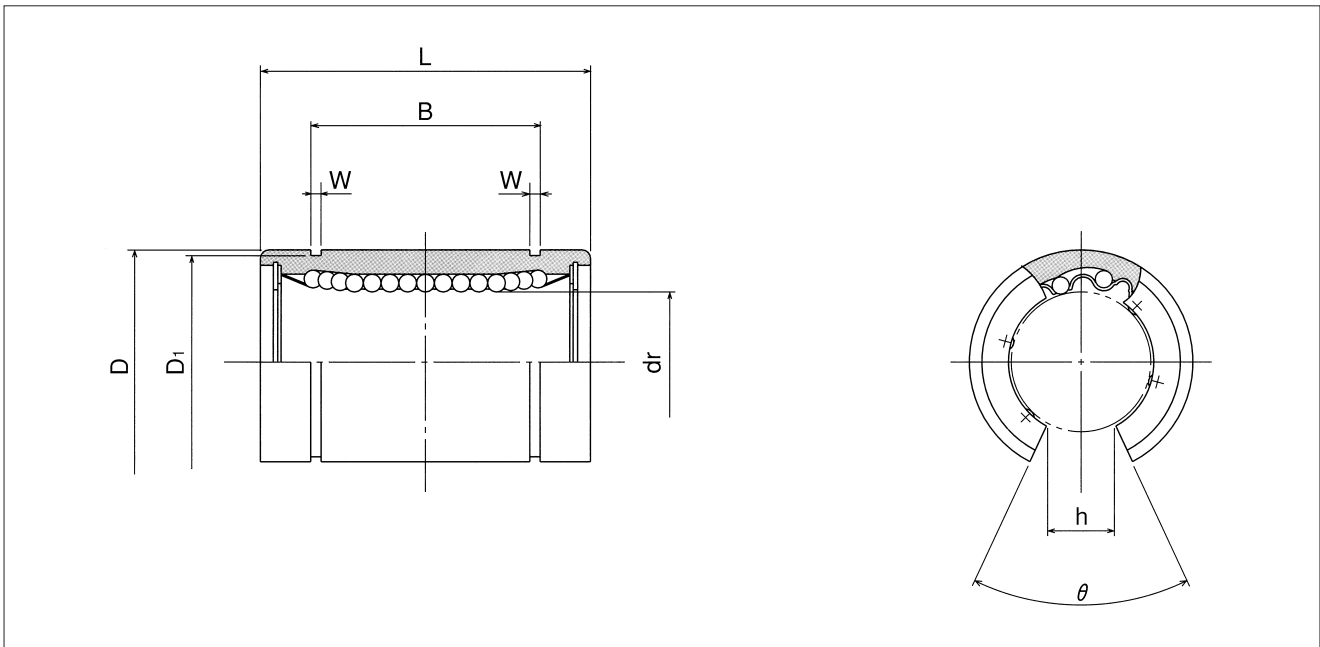


major dimensions								eccentricity*	basic load rating		mass g	shaft diameter mm
L mm	tolerance mm	B mm	tolerance mm	W mm	D_1 mm	h mm	θ		dynamic C N	static C_0 N		
29	0 -0.2	22	0 -0.2	1.3	18	6.8	80°	12	372	549	23	10
30		23		1.3	20	8	80°		510	784	32	12
32		23		1.3	22	9	80°		510	784	37	13
37		26.5		1.6	27	11	80°		774	1,180	58	16
42		30.5		1.6	30.5	11	60°		882	1,370	79	20
59	0 -0.3	41	0 -0.3	1.85	38	12	50°	15	980	1,570	203	25
64		44.5		1.85	43	15	50°		1,570	2,740	228	30
70		49.5		2.1	49	17	50°		1,670	3,140	355	35
80		60.5		2.1	57	20	50°		2,160	4,020	546	40
100		74		2.6	76.5	25	50°		3,820	7,940	1,420	50
110	0 -0.4	85	0 -0.4	3.15	86.5	30	50°	25	4,700	10,000	1,650	60
140		105.5		4.15	116	40	50°		7,350	16,000	3,750	80
175		125.5		4.15	145	50	50°		14,100	34,800	7,200	100
200		158.6		4.15	175	85	80°		16,400	40,000	11,600	120
240		170.6		5.15	204	105	80°		21,100	54,300	15,700	150

1N \approx 0.102kgf


SM-W TYPE

— Double-Wide Type —

This type is a metric dimension series widely used in Japan and other countries.

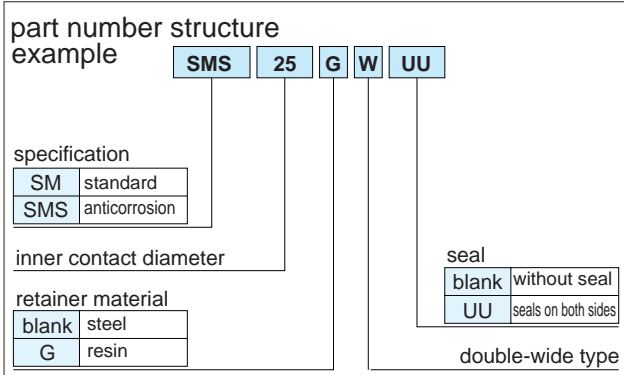

part number				number of ball circuits	dr		D	
standard		anticorrosion			mm	tolerance μm	mm	tolerance μm
steel retainer	resin retainer	stainless retainer	resin retainer					
SM 3W	SM 3GW	SMS 3W	SMS 3GW	4	3	0 -10	7	0
SM 4W	SM 4GW	SMS 4W	SMS 4GW	4	4		8	-11
SM 5W	SM 5GW	SMS 5W	SMS 5GW	4	5		10	
SM 6W	SM 6GW	SMS 6W	SMS 6GW	4	6		12	0
SM 8W	SM 8GW	SMS 8W	SMS 8GW	4	8		15	-13
SM10W	SM10GW	SMS10W	SMS10GW	4	10		19	
SM12W	SM12GW	SMS12W	SMS12GW	4	12		21	0
SM13W	SM13GW	SMS13W	SMS13GW	4	13		23	-16
SM16W	SM16GW	SMS16W	SMS16GW	4	16		28	
SM20W	SM20GW	SMS20W	SMS20GW	5	20		0 -12	32
SM25W	SM25GW	SMS25W	SMS25GW	6	25	40		-19
SM30W	SM30GW	SMS30W	SMS30GW	6	30	45		
SM35W	SM35GW	SMS35W	SMS35GW	6	35	0 -15	52	0
SM40W	SM40GW	SMS40W	SMS40GW	6	40		60	-22
SM50W	SM50GW	SMS50W	SMS50GW	6	50		80	
SM60W	SM60GW	SMS60W	SMS60GW	6	60		90	0/-25

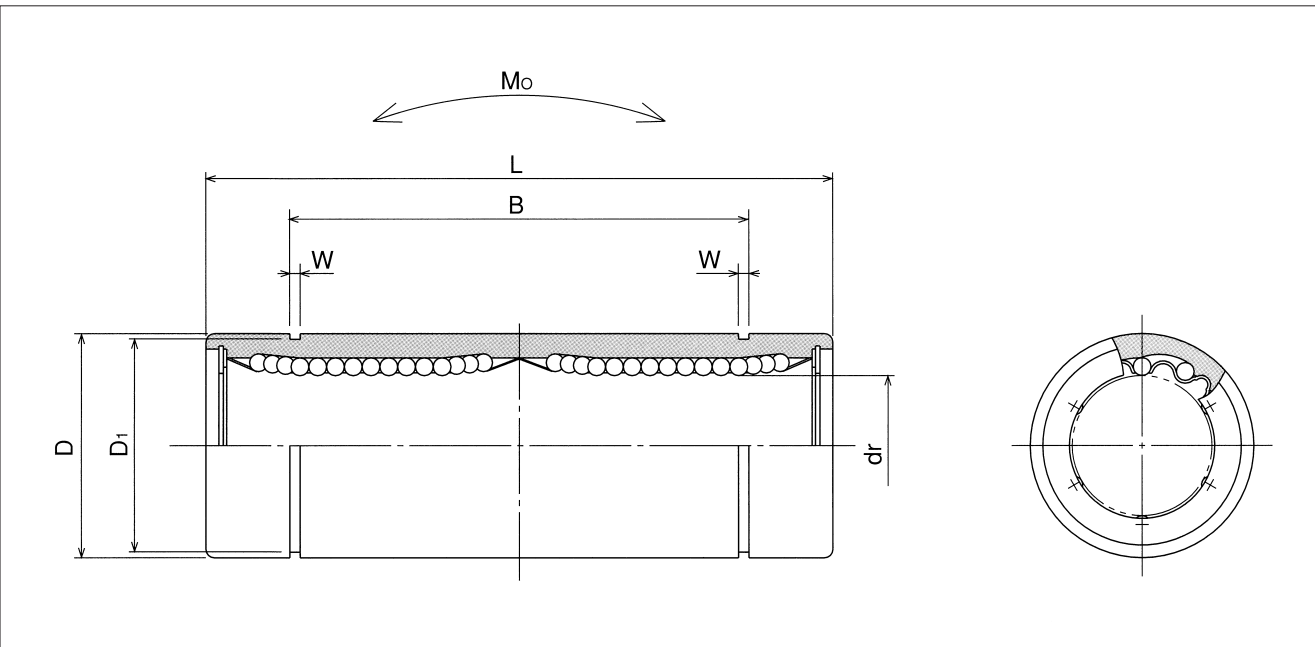



major dimensions						eccentricity	basic load rating		allowable static moment Mo	mass	shaft diameter	
L	B	W	D ₁	dynamic C	static C ₀							
mm	tolerance mm	mm	tolerance mm			mm	mm	μm	N	N	N · m	g
19	0 -0.3	-	-	-	-	10	138	210	0.51	3.2	3	
23		-	-	-	-		176	254	0.63	4.8	4	
28		20.4	0 -0.3	1.1	9.6		265	412	1.38	11	5	
35		27		1.1	11.5	323	530	2.18	16	6		
45		35		1.1	14.3	431	784	4.31	31	8		
55		44		1.3	18	588	1,100	7.24	62	10		
57		46		1.3	20	813	1,570	10.9	80	12		
61		46		1.3	22	813	1,570	11.6	90	13		
70		53		1.6	27	1,230	2,350	19.7	145	16		
80		61	1.6	30.5	1,400	2,740	26.8	180	20			
112	0 -0.4	82	0 -0.4	1.85	38	20	1,560	3,140	43.4	440	25	
123		89		1.85	43		2,490	5,490	82.8	480	30	
135		99		0 -0.4	2.1	49	25	2,650	6,270	110	795	35
151		121			2.1	57		3,430	8,040	147	1,170	40
192		148	2.6		76.5	6,080	15,900	397	3,100	50		
209		170	3.15		86.5	7,550	20,000	530	3,500	60		

1N ≙ 0.102kgf 1N · m ≙ 0.102kgf · m


SMF TYPE

— Round Flange Type —

This type is a metric dimension series widely used in Japan and other countries.

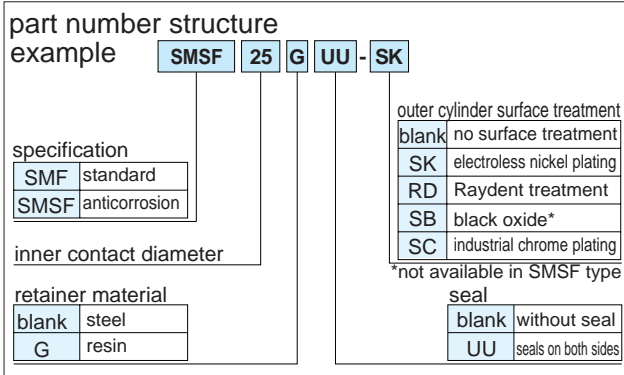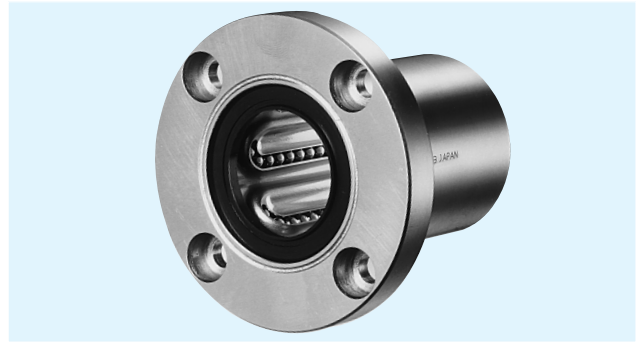

part number				dr	D	L			
standard		anticorrosion					tolerance	tolerance	±0.3
steel retainer	resin retainer	stainless retainer	resin retainer	mm	μm	mm	mm		
SMF 6	SMF 6G	SMSF 6	SMSF 6G	6	0 - 9	12	0	19	
SMF 8s	SMF8sG	SMSF8s	SMSF8sG	8		15	- 13	17	
SMF 8	SMF 8G	SMSF 8	SMSF 8G	8		15	- 16	24	
SMF 10	SMF10G	SMSF10	SMSF10G	10		19		29	
SMF 12	SMF12G	SMSF12	SMSF12G	12		21		0	30
SMF 13	SMF13G	SMSF13	SMSF13G	13		23		- 16	32
SMF 16	SMF16G	SMSF16	SMSF16G	16		28	0	37	
SMF 20	SMF20G	SMSF20	SMSF20G	20		32	0	42	
SMF 25	SMF25G	SMSF25	SMSF25G	25		40	0	59	
SMF 30	SMF30G	SMSF30	SMSF30G	30		45	- 19	64	
SMF 35	SMF35G	SMSF35	SMSF35G	35	52	0	70		
SMF 40	SMF40G	SMSF40	SMSF40G	40	60	0	80		
SMF 50	SMF50G	SMSF50	SMSF50G	50	80	- 22	100		
SMF 60	SMF60G	SMSF60	SMSF60G	60	90	0	110		
SMF 80	—	—	—	80	120	- 25	140		
SMF100	—	—	—	100	0/- 20	150	0/- 29	175	

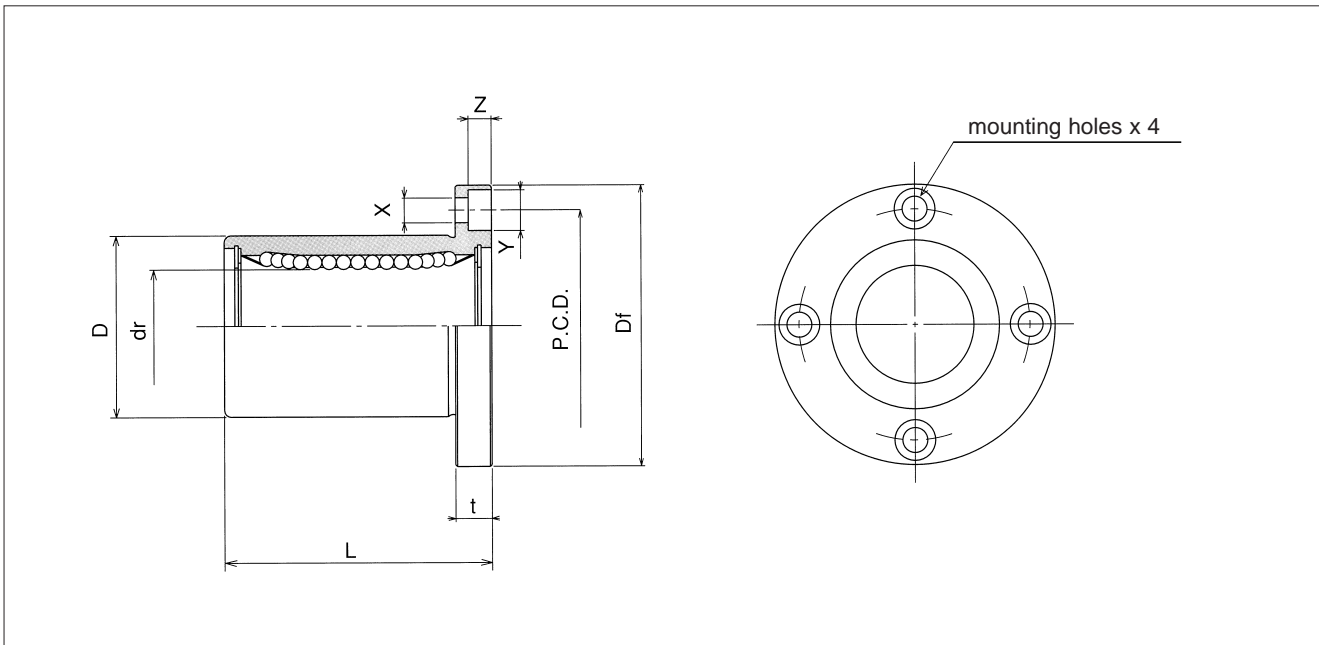

major dimensions				eccentricity	perpendicularity	basic load rating		mass	shaft diameter
flange						dynamic	static		
Df	t	P.C.D.	X×Y×Z	μm	μm			C	Co
mm	mm	mm	mm			N	N		
28	5	20	3.5×6×3.1	12	12	206	265	24	6
32	5	24	3.5×6×3.1			176	216	32	8
32	5	24	3.5×6×3.1			274	392	37	8
40	6	29	4.5×7.5×4.1			372	549	72	10
42	6	32	4.5×7.5×4.1			510	784	76	12
43	6	33	4.5×7.5×4.1			510	784	88	13
48	6	38	4.5×7.5×4.1	15	15	774	1,180	120	16
54	8	43	5.5×9×5.1			882	1,370	180	20
62	8	51	5.5×9×5.1			980	1,570	340	25
74	10	60	6.6×11×6.1	20	20	1,570	2,740	470	30
82	10	67	6.6×11×6.1			1,670	3,140	650	35
96	13	78	9×14×8.1	25	25	2,160	4,020	1,060	40
116	13	98	9×14×8.1			3,820	7,940	2,200	50
134	18	112	11×17×11.1			4,700	10,000	3,000	60
164	18	142	11×17×11.1	30	30	7,350	16,000	5,800	80
200	20	175	14×20×13.1			14,100	34,800	10,600	100

1N ≅ 0.102kgf

SMK TYPE

– Square Flange Type –


This type is a metric dimension series widely used in Japan and other countries.



part number structure											
example	SMSK 25 G UU - SK										
specification	<table border="1"> <tr> <td>SMK</td> <td>standard</td> </tr> <tr> <td>SMSK</td> <td>anticorrosion</td> </tr> </table>	SMK	standard	SMSK	anticorrosion						
SMK	standard										
SMSK	anticorrosion										
inner contact diameter											
retainer material	<table border="1"> <tr> <td>blank</td> <td>steel</td> </tr> <tr> <td>G</td> <td>resin</td> </tr> </table>	blank	steel	G	resin						
blank	steel										
G	resin										
outer cylinder surface treatment	<table border="1"> <tr> <td>blank</td> <td>no surface treatment</td> </tr> <tr> <td>SK</td> <td>electroless nickel plating</td> </tr> <tr> <td>RD</td> <td>Raydent treatment</td> </tr> <tr> <td>SB</td> <td>black oxide*</td> </tr> <tr> <td>SC</td> <td>industrial chrome plating</td> </tr> </table>	blank	no surface treatment	SK	electroless nickel plating	RD	Raydent treatment	SB	black oxide*	SC	industrial chrome plating
blank	no surface treatment										
SK	electroless nickel plating										
RD	Raydent treatment										
SB	black oxide*										
SC	industrial chrome plating										
seal	<table border="1"> <tr> <td>blank</td> <td>without seal</td> </tr> <tr> <td>UU</td> <td>seals on both sides</td> </tr> </table>	blank	without seal	UU	seals on both sides						
blank	without seal										
UU	seals on both sides										

*not available in SMSK type

part number				dr		D		L	
standard		anticorrosion		mm	tolerance μm	mm	tolerance μm	±0.3 mm	
steel retainer	resin retainer	stainless retainer	resin retainer						
SMK 6	SMK 6G	SMSK 6	SMSK 6G	6	0 - 9	12	0 - 13	19	
SMK 8s	SMK8sG	SMSK8s	SMSK8sG	8		15		17	
SMK 8	SMK 8G	SMSK 8	SMSK 8G	8		15		24	
SMK 10	SMK10G	SMSK10	SMSK10G	10		19	0 - 16	29	
SMK 12	SMK12G	SMSK12	SMSK12G	12		21		30	
SMK 13	SMK13G	SMSK13	SMSK13G	13		23		32	
SMK 16	SMK16G	SMSK16	SMSK16G	16		28		37	
SMK 20	SMK20G	SMSK20	SMSK20G	20		0 - 10	32	0	42
SMK 25	SMK25G	SMSK25	SMSK25G	25			40		59
SMK 30	SMK30G	SMSK30	SMSK30G	30			45	- 19	64
SMK 35	SMK35G	SMSK35	SMSK35G	35	0 - 12	52	0	70	
SMK 40	SMK40G	SMSK40	SMSK40G	40		60		80	
SMK 50	SMK50G	SMSK50	SMSK50G	50		80		- 22	100
SMK 60	SMK60G	SMSK60	SMSK60G	60	0	90	0	110	
SMK 80	—	—	—	80		- 15		120	- 25
SMK100	—	—	—	100	0/- 20	150	0/- 29	175	

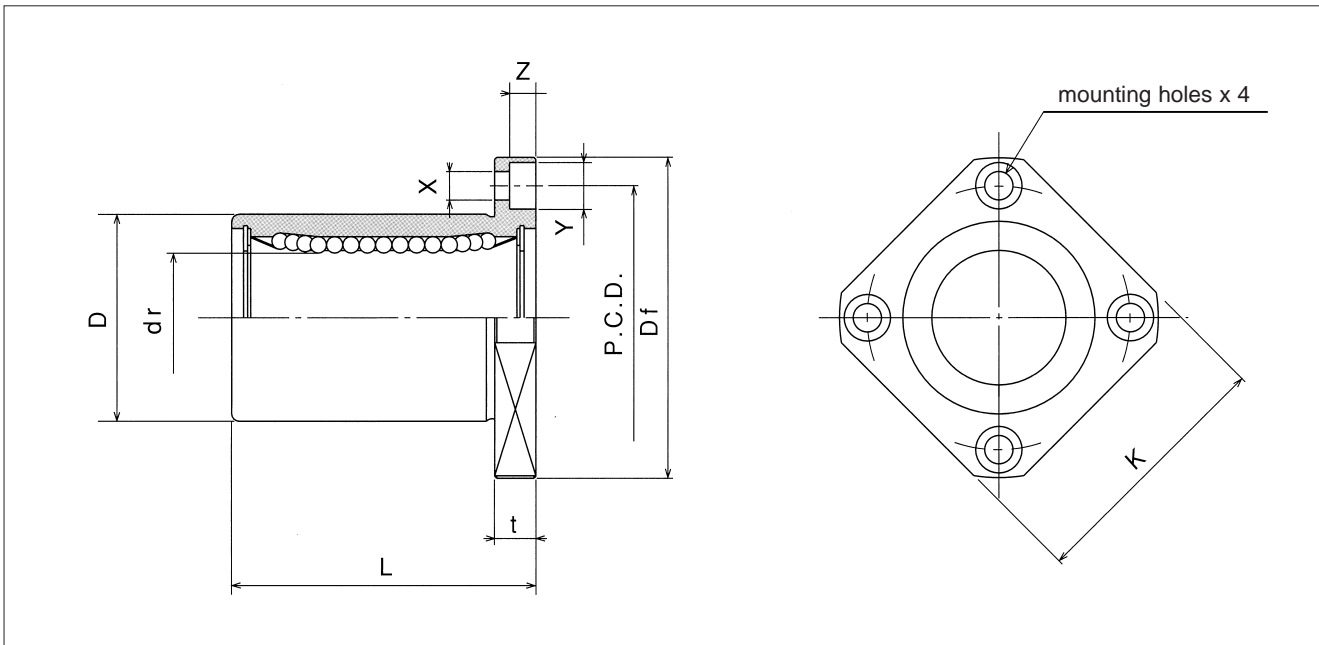


major dimensions					eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange							dynamic	static		
Df	K	t	P.C.D.	X×Y×Z	μm	μm			C	Co
28	22	5	20	3.5×6×3.1	12	12	206	265	18	6
32	25	5	24	3.5×6×3.1			176	216	24	8
32	25	5	24	3.5×6×3.1			274	392	29	8
40	30	6	29	4.5×7.5×4.1			372	549	52	10
42	32	6	32	4.5×7.5×4.1			510	784	57	12
43	34	6	33	4.5×7.5×4.1			510	784	72	13
48	37	6	38	4.5×7.5×4.1	15	15	774	1,180	104	16
54	42	8	43	5.5×9×5.1			882	1,370	145	20
62	50	8	51	5.5×9×5.1			980	1,570	300	25
74	58	10	60	6.6×11×6.1	20	20	1,570	2,740	375	30
82	64	10	67	6.6×11×6.1			1,670	3,140	560	35
96	75	13	78	9×14×8.1	25	25	2,160	4,020	880	40
116	92	13	98	9×14×8.1			3,820	7,940	2,000	50
134	106	18	112	11×17×11.1			4,700	10,000	2,560	60
164	136	18	142	11×17×11.1	30	30	7,350	16,000	5,300	80
200	170	20	175	14×20×13.1			14,100	34,800	9,900	100

1N≐0.102kgf

SMT TYPE


— Two Side Cut Flange Type —

This type is a metric dimension series widely used in Japan and other countries.

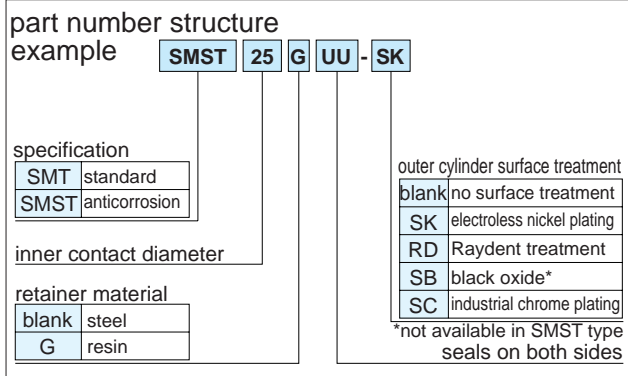

part number*								
standard		anticorrosion		dr		D		L
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm
SMT 6UU	SMT 6GUU	SMST 6UU	SMST 6GUU	6	0 - 9	12	0	19
SMT 8UU	SMT 8GUU	SMST 8UU	SMST 8GUU	8		15	-13	24
SMT10UU	SMT10GUU	SMST10UU	SMST10GUU	10		19	0	29
SMT12UU	SMT12GUU	SMST12UU	SMST12GUU	12		21	-16	30
SMT13UU	SMT13GUU	SMST13UU	SMST13GUU	13		23	-16	32
SMT16UU	SMT16GUU	SMST16UU	SMST16GUU	16		28	-16	37
SMT20UU	SMT20GUU	SMST20UU	SMST20GUU	20	0 -10	32	0	42
SMT25UU	SMT25GUU	SMST25UU	SMST25GUU	25		40	-19	59
SMT30UU	SMT30GUU	SMST30UU	SMST30GUU	30		45	-19	64

* UU type is standard feature.

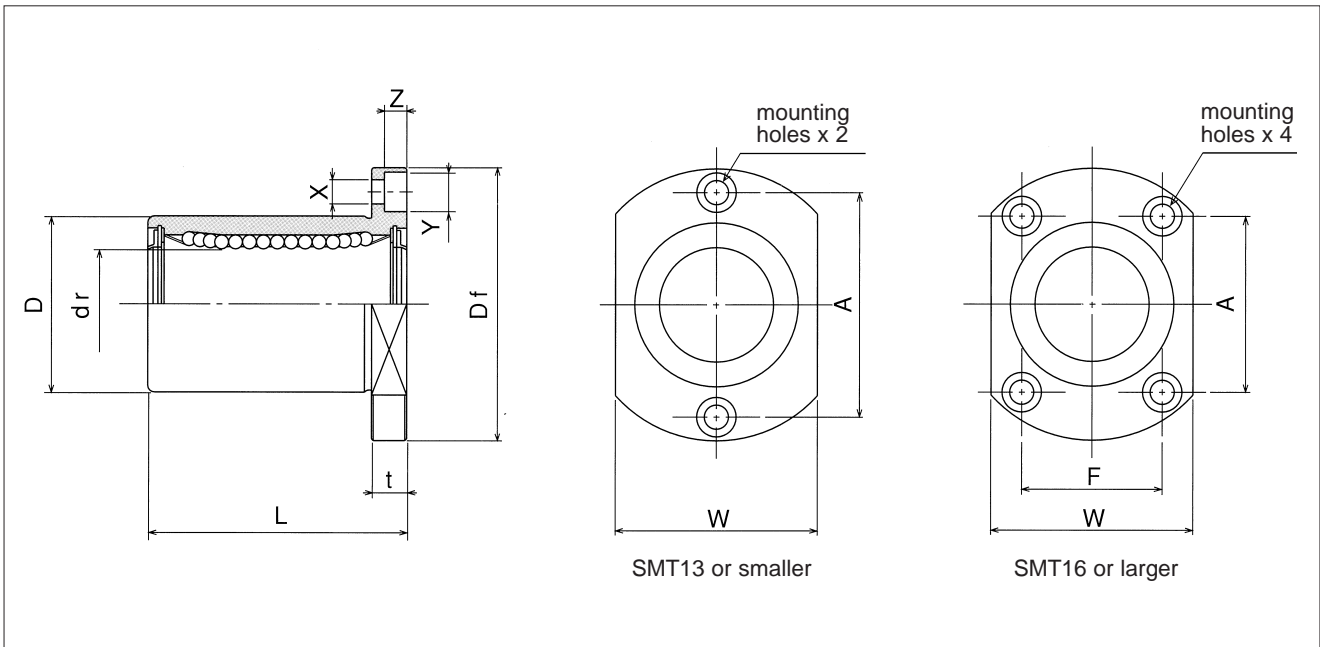


major dimensions						eccentricity μm	perpen- dicularity μm	basic load rating		mass g	shaft diameter mm
flange								dynamic C N	static Co N		
Df mm	W mm	t mm	A mm	F mm	X×Y×Z mm						
28	18	5	20	—	3.5×6×3.1	12	12	206	265	21	6
32	21	5	24	—	3.5×6×3.1			274	392	33	8
40	25	6	29	—	4.5×7.5×4.1			372	549	64	10
42	27	6	32	—	4.5×7.5×4.1			510	784	68	12
43	29	6	33	—	4.5×7.5×4.1			510	784	81	13
48	34	6	31	22	4.5×7.5×4.1	15	15	774	1,180	112	16
54	38	8	36	24	5.5×9×5.1			882	1,370	167	20
62	46	8	40	32	5.5×9×5.1			980	1,570	325	25
74	51	10	49	35	6.6×11×6.1			1,570	2,740	388	30

1N≐0.102kgf

SMF-E TYPE


– Round Flange Type with Pilot End –

This type is a metric dimension series widely used in Japan and other countries.

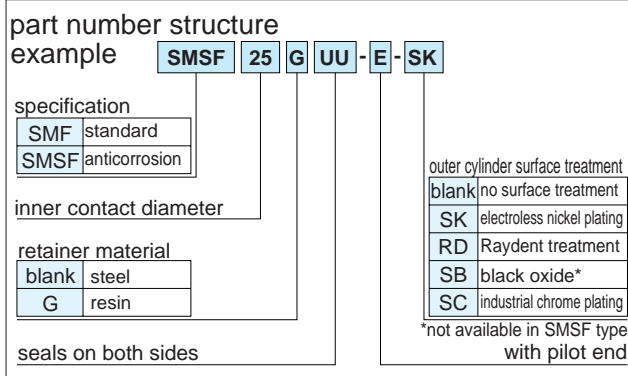

part number*								
standard		anticorrosion		dr		D		L
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm
SMF 6UU-E	SMF 6GUU-E	SMSF 6UU-E	SMSF 6GUU-E	6	0 - 9	12	0	19
SMF 8UU-E	SMF 8GUU-E	SMSF 8UU-E	SMSF 8GUU-E	8		15	-13	24
SMF10UU-E	SMF10GUU-E	SMSF10UU-E	SMSF10GUU-E	10		19	0 -16	29
SMF12UU-E	SMF12GUU-E	SMSF12UU-E	SMSF12GUU-E	12		21		30
SMF13UU-E	SMF13GUU-E	SMSF13UU-E	SMSF13GUU-E	13		23		32
SMF16UU-E	SMF16GUU-E	SMSF16UU-E	SMSF16GUU-E	16		28		37
SMF20UU-E	SMF20GUU-E	SMSF20UU-E	SMSF20GUU-E	20	0 -10	32	0	42
SMF25UU-E	SMF25GUU-E	SMSF25UU-E	SMSF25GUU-E	25		40	59	
SMF30UU-E	SMF30GUU-E	SMSF30UU-E	SMSF30GUU-E	30		45	-19	64
SMF35UU-E	SMF35GUU-E	—	—	35	0 -12	52	0	70
SMF40UU-E	SMF40GUU-E	—	—	40		60	80	
SMF50UU-E	SMF50GUU-E	—	—	50		80	-22	100
SMF60UU-E	SMF60GUU-E	—	—	60		0/-15	90	0/-25

* UU type is standard feature.

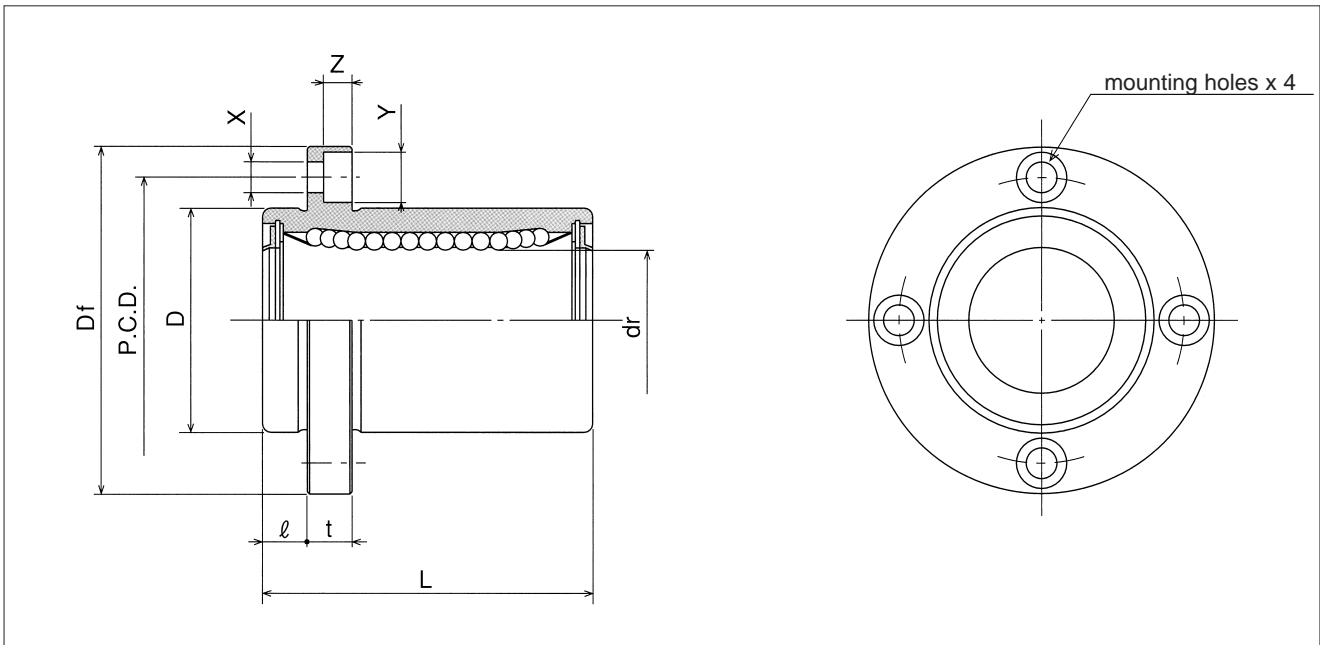


major dimensions					eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange							dynamic	static		
ℓ mm	Df mm	t mm	P.C.D. mm	X×Y×Z mm	μm	μm			C N	Co N
5	28	5	20	3.5×6×3.1	12	12	206	265	24	6
5	32	5	24	3.5×6×3.1			274	392	37	8
6	40	6	29	4.5×7.5×4.1			372	549	72	10
6	42	6	32	4.5×7.5×4.1			510	784	76	12
6	43	6	33	4.5×7.5×4.1			510	784	88	13
6	48	6	38	4.5×7.5×4.1			774	1,180	120	16
8	54	8	43	5.5×9×5.1	15	15	882	1,370	180	20
8	62	8	51	5.5×9×5.1			980	1,570	340	25
10	74	10	60	6.6×11×6.1			1,570	2,740	470	30
10	82	10	67	6.6×11×6.1	20	20	1,670	3,140	650	35
13	96	13	78	9×14×8.1			2,160	4,020	1,060	40
13	116	13	98	9×14×8.1			3,820	7,940	2,200	50
18	134	18	112	11×17×11.1			4,700	10,000	3,000	60

1N \approx 0.102kgf

SMK-E TYPE


– Square Flange Type with Pilot End –

This type is a metric dimension series widely used in Japan and other countries.

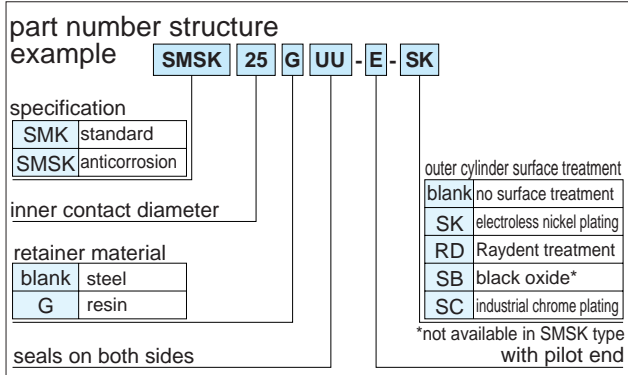

part number*								
standard		anticorrosion		dr		D		L
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm
SMK 6UU-E	SMK 6GUU-E	SMSK 6UU-E	SMSK 6GUU-E	6	0 - 9	12	0	19
SMK 8UU-E	SMK 8GUU-E	SMSK 8UU-E	SMSK 8GUU-E	8		15	-13	24
SMK10UU-E	SMK10GUU-E	SMSK10UU-E	SMSK10GUU-E	10		19	0	29
SMK12UU-E	SMK12GUU-E	SMSK12UU-E	SMSK12GUU-E	12		21	-16	30
SMK13UU-E	SMK13GUU-E	SMSK13UU-E	SMSK13GUU-E	13		23	-16	32
SMK16UU-E	SMK16GUU-E	SMSK16UU-E	SMSK16GUU-E	16		28	-16	37
SMK20UU-E	SMK20GUU-E	SMSK20UU-E	SMSK20GUU-E	20	0 -10	32	0	42
SMK25UU-E	SMK25GUU-E	SMSK25UU-E	SMSK25GUU-E	25		40	0	59
SMK30UU-E	SMK30GUU-E	SMSK30UU-E	SMSK30GUU-E	30		45	-19	64
SMK35UU-E	SMK35GUU-E	—	—	35	0 -12	52	0	70
SMK40UU-E	SMK40GUU-E	—	—	40		60	0	80
SMK50UU-E	SMK50GUU-E	—	—	50		80	-22	100
SMK60UU-E	SMK60GUU-E	—	—	60	0/-15	90	0/-25	110

* UU type is standard feature.

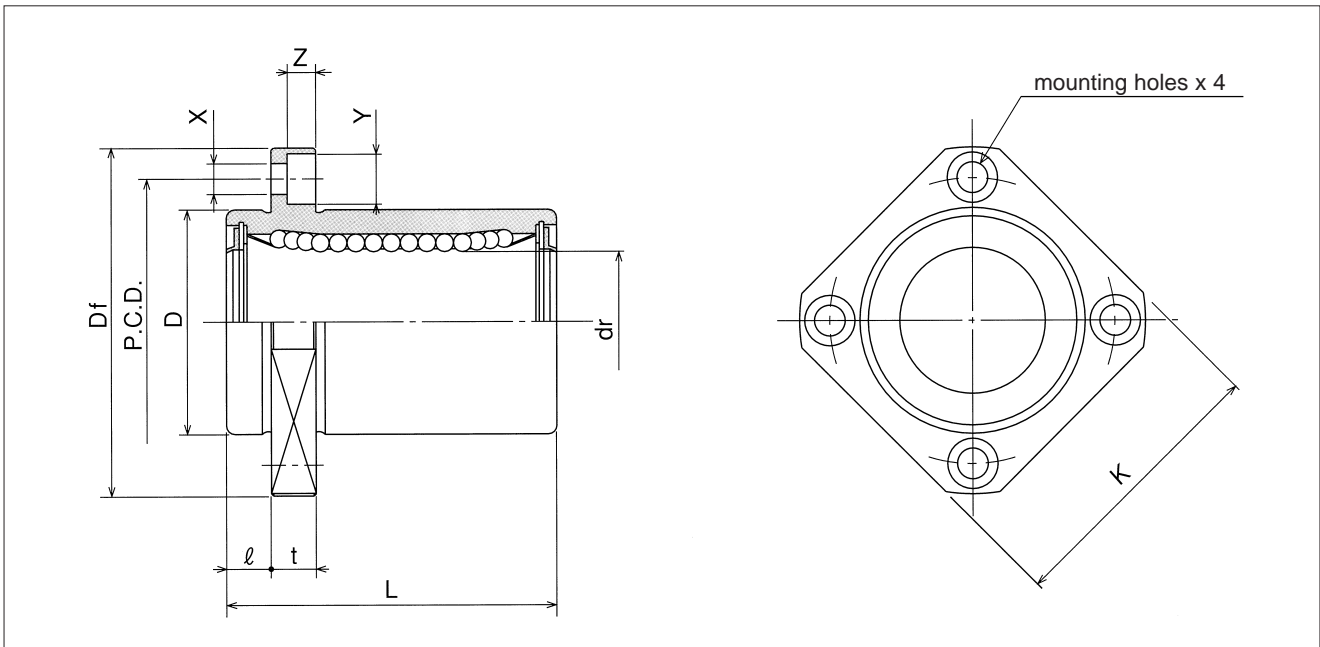


major dimensions						eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange								dynamic	static		
\varnothing mm	Df mm	K mm	t mm	P.C.D. mm	X×Y×Z mm	μ m	μ m			C N	Co N
5	28	22	5	20	3.5×6×3.1	12	12	206	265	18	6
5	32	25	5	24	3.5×6×3.1			274	392	29	8
6	40	30	6	29	4.5×7.5×4.1			372	549	52	10
6	42	32	6	32	4.5×7.5×4.1			510	784	57	12
6	43	34	6	33	4.5×7.5×4.1			510	784	72	13
6	48	37	6	38	4.5×7.5×4.1			774	1,180	104	16
8	54	42	8	43	5.5×9×5.1	15	15	882	1,370	145	20
8	62	50	8	51	5.5×9×5.1			980	1,570	300	25
10	74	58	10	60	6.6×11×6.1			1,570	2,740	375	30
10	82	64	10	67	6.6×11×6.1	20	20	1,670	3,140	560	35
13	96	75	13	78	9×14×8.1			2,160	4,020	880	40
13	116	92	13	98	9×14×8.1			3,820	7,940	2,000	50
18	134	106	18	112	11×17×11.1	25	25	4,700	10,000	2,560	60

1N \approx 0.102kgf

SMT-E TYPE


– Two Side Cut Pilot End Flange Type –

This type is a metric dimension series widely used in Japan and other countries.

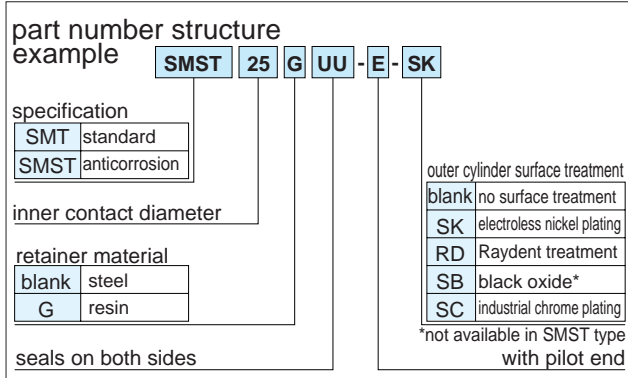

part number*									
standard		anticorrosion		dr		D		L	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	ℓ mm
SMT 6UU-E	SMT 6GUU-E	SMST 6UU-E	SMST 6GUU-E	6	0 - 9	12	0	19	5
SMT 8UU-E	SMT 8GUU-E	SMST 8UU-E	SMST 8GUU-E	8		15	-13	24	5
SMT10UU-E	SMT10GUU-E	SMST10UU-E	SMST10GUU-E	10		19	0 -16	29	6
SMT12UU-E	SMT12GUU-E	SMST12UU-E	SMST12GUU-E	12		21		30	6
SMT13UU-E	SMT13GUU-E	SMST13UU-E	SMST13GUU-E	13		23		32	6
SMT16UU-E	SMT16GUU-E	SMST16UU-E	SMST16GUU-E	16		28		37	6
SMT20UU-E	SMT20GUU-E	SMST20UU-E	SMST20GUU-E	20	0 -10	32	0 -19	42	8
SMT25UU-E	SMT25GUU-E	SMST25UU-E	SMST25GUU-E	25		40		59	8
SMT30UU-E	SMT30GUU-E	SMST30UU-E	SMST30GUU-E	30		45		64	10

* UU type is standard feature.

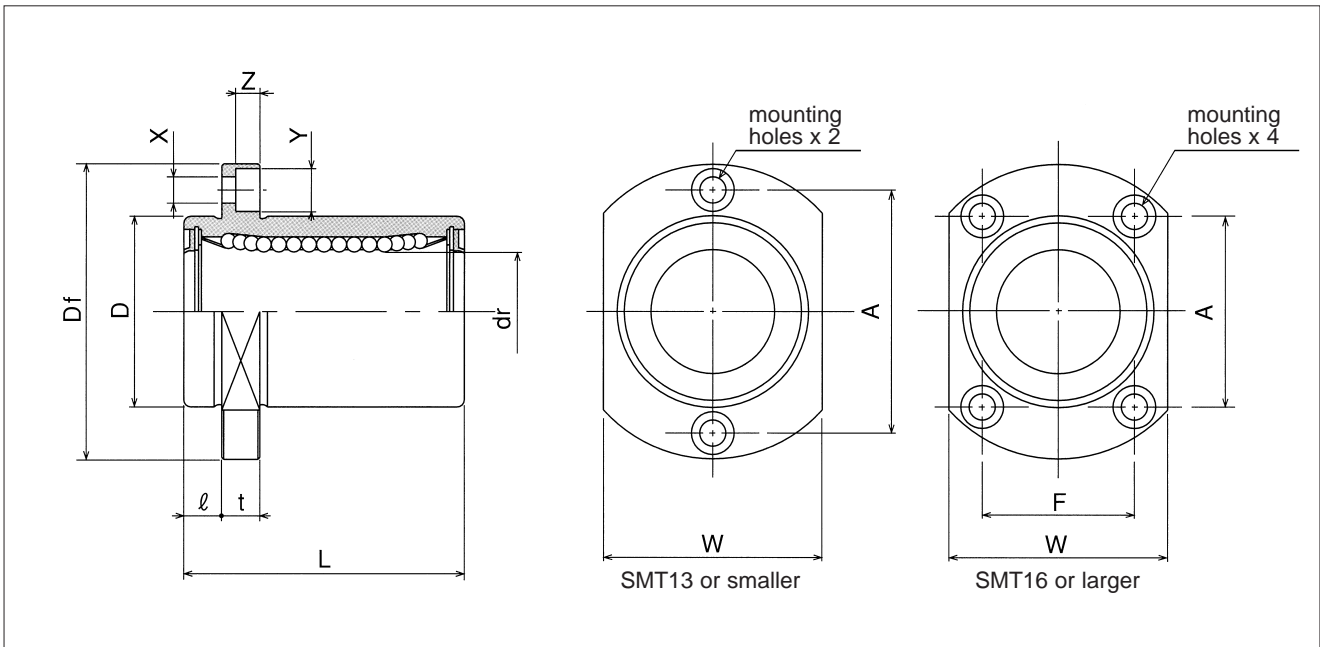



major dimensions						eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange								dynamic	static		
Df mm	W mm	t mm	A mm	F mm	X×Y×Z mm	μm	μm			C N	Co N
28	18	5	20	—	3.5×6×3.1	12	12	206	265	21	6
32	21	5	24	—	3.5×6×3.1			274	392	33	8
40	25	6	29	—	4.5×7.5×4.1			372	549	64	10
42	27	6	32	—	4.5×7.5×4.1			510	784	68	12
43	29	6	33	—	4.5×7.5×4.1			510	784	81	13
48	34	6	31	22	4.5×7.5×4.1			774	1,180	112	16
54	38	8	36	24	5.5×9×5.1	15	15	882	1,370	167	20
62	46	8	40	32	5.5×9×5.1			980	1,570	325	25
74	51	10	49	35	6.6×11×6.1			1,570	2,740	388	30

1N≐0.102kgf


SMF-W TYPE

— Round Flange Double-Wide Type —

This type is a metric dimension series widely used in Japan and other countries.

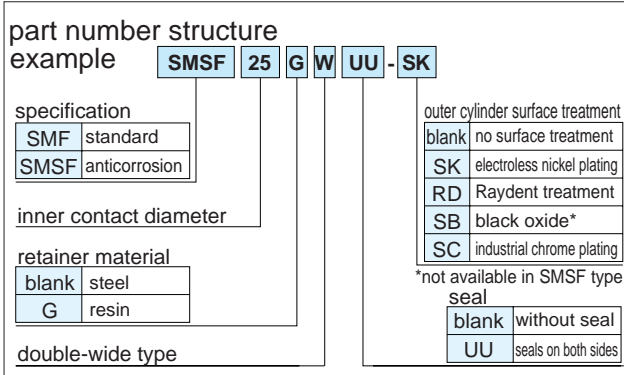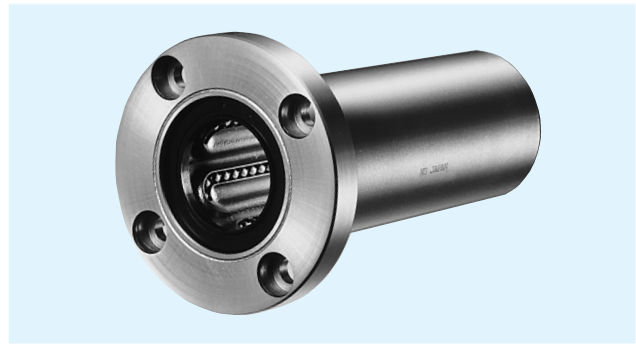

part number				dr		D		L
standard		anticorrosion		mm	tolerance μm	mm	tolerance μm	±0.3 mm
steel retainer	resin retainer	stainless retainer	resin retainer					
SMF 6W	SMF 6GW	SMSF 6W	SMSF 6GW	6	0	12	0	35
SMF 8W	SMF 8GW	SMSF 8W	SMSF 8GW	8		15	-13	45
SMF10W	SMF10GW	SMSF10W	SMSF10GW	10		19	0	55
SMF12W	SMF12GW	SMSF12W	SMSF12GW	12		21		61
SMF13W	SMF13GW	SMSF13W	SMSF13GW	13		23		70
SMF16W	SMF16GW	SMSF16W	SMSF16GW	16		28	-16	80
SMF20W	SMF20GW	SMSF20W	SMSF20GW	20	32	0		112
SMF25W	SMF25GW	SMSF25W	SMSF25GW	25	40	-19		123
SMF30W	SMF30GW	SMSF30W	SMSF30GW	30	45			135
SMF35W	SMF35GW	SMSF35W	SMSF35GW	35	52			151
SMF40W	SMF40GW	SMSF40W	SMSF40GW	40	60	-22		192
SMF50W	SMF50GW	SMSF50W	SMSF50GW	50	80		209	
SMF60W	SMF60GW	SMSF60W	SMSF60GW	60	0/-20		90	0/-25

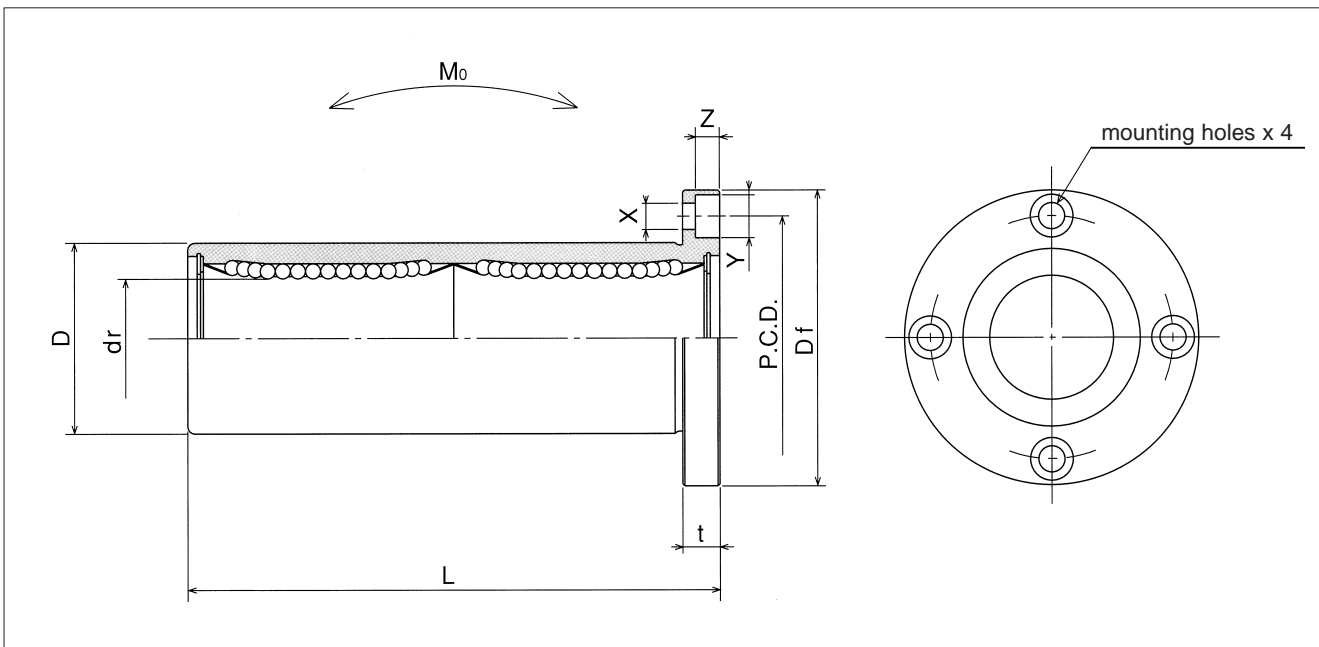



major dimensions				eccentricity	perpendicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						dynamic	static			
Df mm	t mm	P.C.D. mm	X×Y×Z mm	μm	μm	C N	Co N	Mo N·m	g	mm
28	5	20	3.5×6×3.1	15	15	323	530	2.18	31	6
32	5	24	3.5×6×3.1			431	784	4.31	51	8
40	6	29	4.5×7.5×4.1			588	1,100	7.24	98	10
42	6	32	4.5×7.5×4.1			813	1,570	10.9	110	12
43	6	33	4.5×7.5×4.1			813	1,570	11.6	130	13
48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190	16
54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260	20
62	8	51	5.5×9×5.1			1,560	3,140	43.4	540	25
74	10	60	6.6×11×6.1			2,490	5,490	82.8	680	30
82	10	67	6.6×11×6.1			2,650	6,270	110	1,020	35
96	13	78	9×14×8.1	25	25	3,430	8,040	147	1,570	40
116	13	98	9×14×8.1			6,080	15,900	397	3,600	50
134	18	112	11×17×11.1			7,550	20,000	530	4,500	60

1N≐0.102kgf 1N·m≐0.102kgf·m


SMK-W TYPE

— Square Flange Double-Wide Type —

This type is a metric dimension series widely used in Japan and other countries.

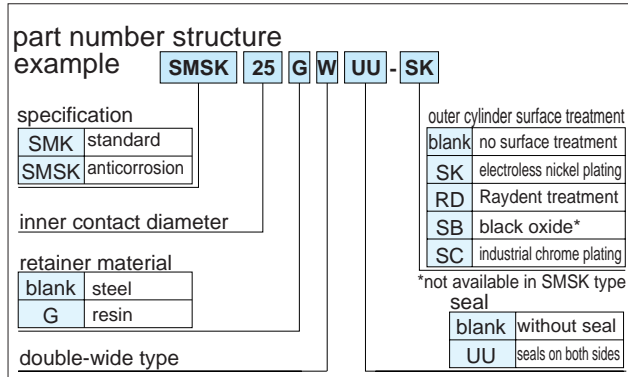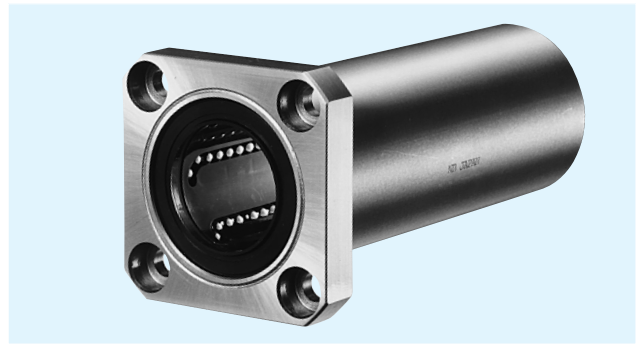

part number									
standard		anticorrosion		dr		D		L	Df
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	mm
SMK 6W	SMK 6GW	SMSK 6W	SMSK 6GW	6	-10	12	0	35	28
SMK 8W	SMK 8GW	SMSK 8W	SMSK 8GW	8		15	-13	45	32
SMK10W	SMK10GW	SMSK10W	SMSK10GW	10		19	0	55	40
SMK12W	SMK12GW	SMSK12W	SMSK12GW	12		21		57	42
SMK13W	SMK13GW	SMSK13W	SMSK13GW	13	-16	23	61	43	
SMK16W	SMK16GW	SMSK16W	SMSK16GW	16		28	70	48	
SMK20W	SMK20GW	SMSK20W	SMSK20GW	20	0	32	80	54	
SMK25W	SMK25GW	SMSK25W	SMSK25GW	25		40	112	62	
SMK30W	SMK30GW	SMSK30W	SMSK30GW	30	-12	45	-19	123	74
SMK35W	SMK35GW	SMSK35W	SMSK35GW	35	0	52	135	82	
SMK40W	SMK40GW	SMSK40W	SMSK40GW	40		60	151	96	
SMK50W	SMK50GW	SMSK50W	SMSK50GW	50	-15	80	-22	192	116
SMK60W	SMK60GW	SMSK60W	SMSK60GW	60	0/-20	90	0/-25	209	134

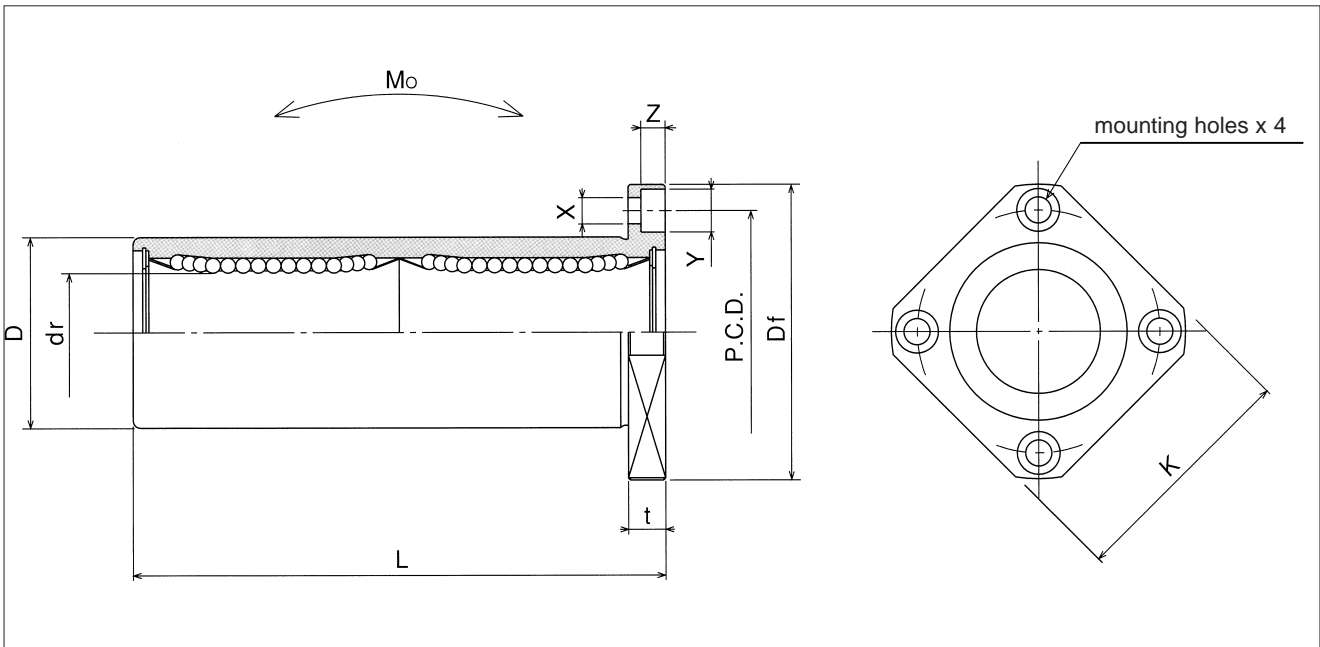


major dimensions				eccentricity μm	perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
flange						dynamic C N	static C_o N			
K mm	t mm	P.C.D. mm	$X \times Y \times Z$ mm							
22	5	20	3.5×6×3.1	15	15	323	530	2.18	25	6
25	5	24	3.5×6×3.1			431	784	4.31	43	8
30	6	29	4.5×7.5×4.1			588	1,100	7.24	78	10
32	6	32	4.5×7.5×4.1			813	1,570	10.9	90	12
34	6	33	4.5×7.5×4.1			813	1,570	11.6	108	13
37	6	38	4.5×7.5×4.1			1,230	2,350	19.7	165	16
42	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	225	20
50	8	51	5.5×9×5.1			1,560	3,140	43.4	500	25
58	10	60	6.6×11×6.1			2,490	5,490	82.8	590	30
64	10	67	6.6×11×6.1	25	25	2,650	6,270	110	930	35
75	13	78	9×14×8.1			3,430	8,040	147	1,380	40
92	13	98	9×14×8.1			6,080	15,900	397	3,400	50
106	18	112	11×17×11.1			7,550	20,000	530	4,060	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

SMT-W TYPE


— Two Side Cut Double-Wide Flange Type —

This type is a metric dimension series widely used in Japan and other countries.

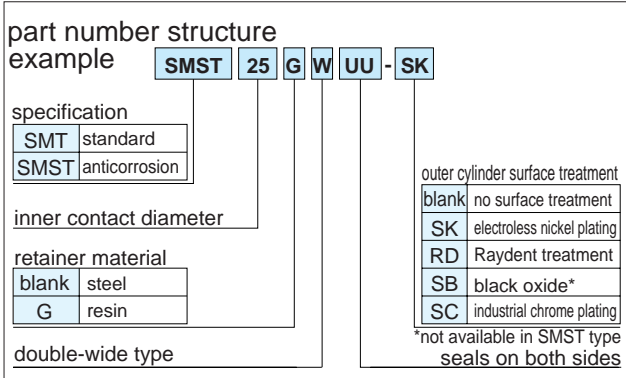

part number*										
standard		anticorrosion		dr		D		L	Df	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	mm	
SMT 6WUU	SMT 6GWUU	SMST 6WUU	SMST 6GWUU	6	-10	12	0	35	28	
SMT 8WUU	SMT 8GWUU	SMST 8WUU	SMST 8GWUU	8		15	-13	45	32	
SMT10WUU	SMT10GWUU	SMST10WUU	SMST10GWUU	10		19	-16	55	40	
SMT12WUU	SMT12GWUU	SMST12WUU	SMST12GWUU	12		21		0	57	42
SMT13WUU	SMT13GWUU	SMST13WUU	SMST13GWUU	13		23		61	43	
SMT16WUU	SMT16GWUU	SMST16WUU	SMST16GWUU	16		28	70	48		
SMT20WUU	SMT20GWUU	SMST20WUU	SMST20GWUU	20	-12	32	0	80	54	
SMT25WUU	SMT25GWUU	SMST25WUU	SMST25GWUU	25		40		112	62	
SMT30WUU	SMT30GWUU	SMST30WUU	SMST30GWUU	30		45		-19	123	74

* UU type is standard feature.

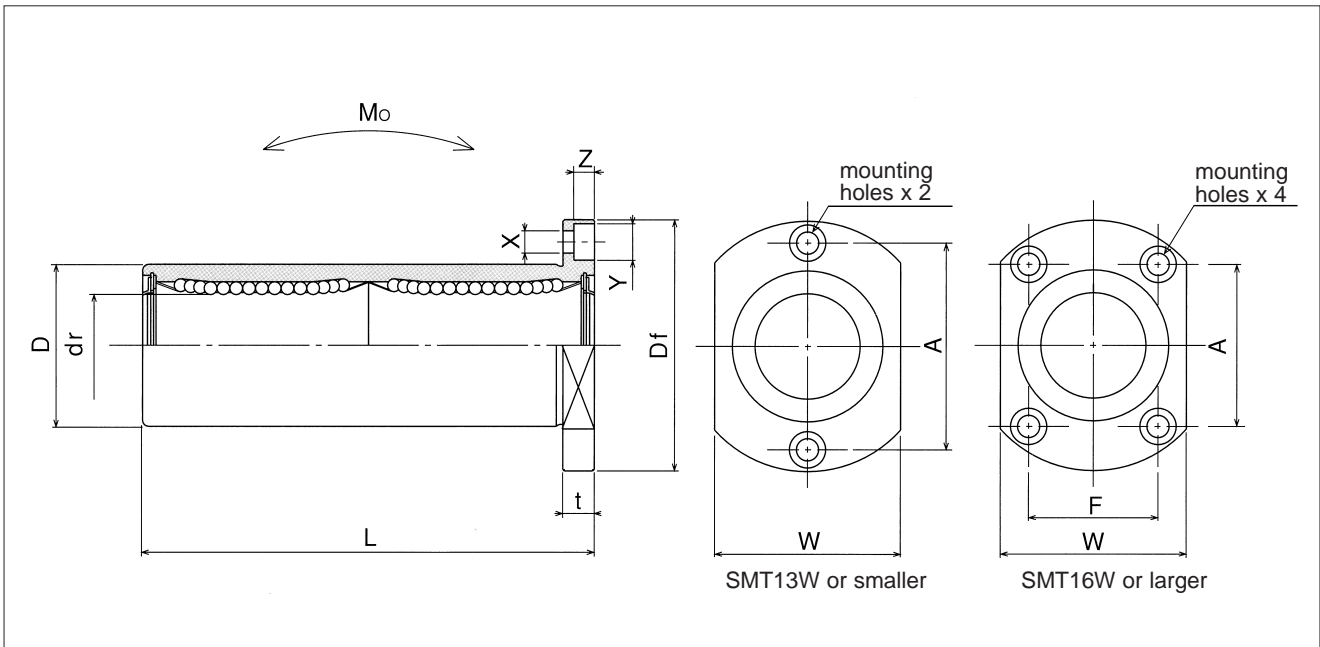


major dimensions					eccentricity μm	perpen- dicularity μm	basic load rating		allowable static moment Mo $\text{N}\cdot\text{m}$	mass g	shaft diameter mm
flange							dynamic C N	static Co N			
W mm	t mm	A mm	F mm	X×Y×Z mm							
18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16
38	8	36	24	5.5×9×5.1	20	20	1,400	2,740	26.8	247	20
46	8	40	32	5.5×9×5.1			1,560	3,140	43.4	525	25
51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m


SMFC TYPE

– Center Mount Round Flange Type –

This type is a metric dimension series widely used in Japan and other countries.

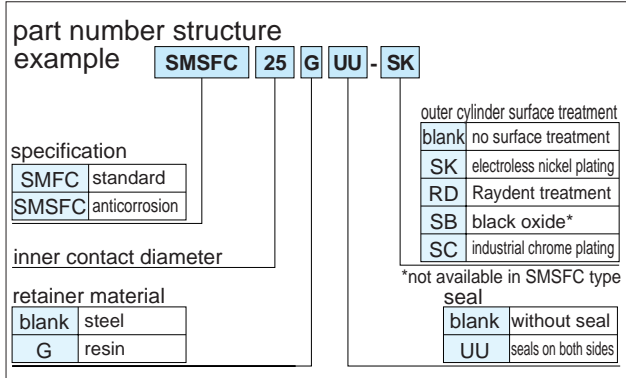

part number									
standard		anticorrosion		dr		D		L	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	ℓ mm
SMFC 6	SMFC 6G	SMSFC 6	SMSFC 6G	6		12	0	35	15
SMFC 8	SMFC 8G	SMSFC 8	SMSFC 8G	8		15	-13	45	20
SMFC10	SMFC10G	SMSFC10	SMSFC10G	10	0	19		55	24.5
SMFC12	SMFC12G	SMSFC12	SMSFC12G	12	-10	21	0	57	25.5
SMFC13	SMFC13G	SMSFC13	SMSFC13G	13		23	-16	61	27.5
SMFC16	SMFC16G	SMSFC16	SMSFC16G	16		28		70	32
SMFC20	SMFC20G	SMSFC20	SMSFC20G	20	0	32	0	80	36
SMFC25	SMFC25G	SMSFC25	SMSFC25G	25		40	0	112	52
SMFC30	SMFC30G	SMSFC30	SMSFC30G	30	-12	45	-19	123	56.5
SMFC35	SMFC35G	SMSFC35	SMSFC35G	35	0	52	0	135	62.5
SMFC40	SMFC40G	SMSFC40	SMSFC40G	40		60	0	151	69
SMFC50	SMFC50G	SMSFC50	SMSFC50G	50	-15	80	-22	192	89.5
SMFC60	SMFC60G	SMSFC60	SMSFC60G	60	0/-20	90	0/-25	209	95.5

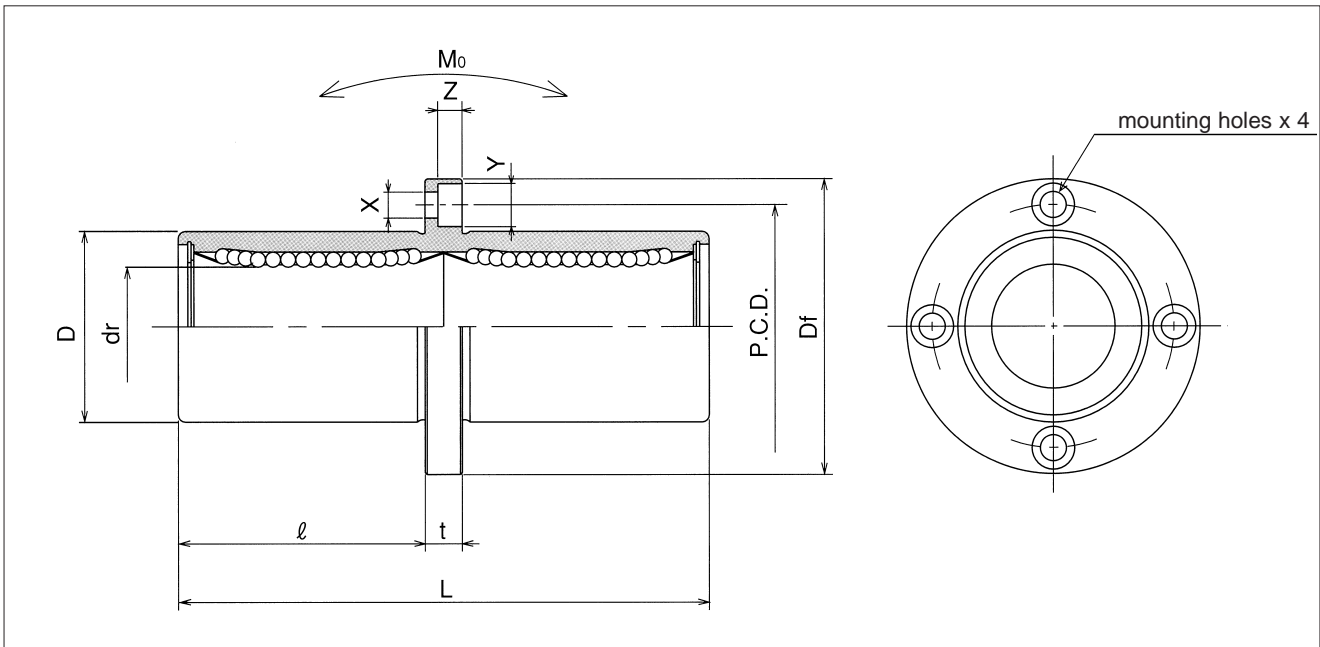



major dimensions				eccentricity	perpendicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						dynamic	static			
Df	t	P.C.D.	X×Y×Z	μm	μm			C	Co	Mo
mm	mm	mm	mm			N	N	N·m		
28	5	20	3.5×6×3.1	15	15	323	530	2.18	31	6
32	5	24	3.5×6×3.1			431	784	4.31	51	8
40	6	29	4.5×7.5×4.1			588	1,100	7.24	98	10
42	6	32	4.5×7.5×4.1			813	1,570	10.9	110	12
43	6	33	4.5×7.5×4.1			813	1,570	11.6	130	13
48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190	16
54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260	20
62	8	51	5.5×9×5.1			1,560	3,140	43.4	540	25
74	10	60	6.6×11×6.1			2,490	5,490	82.8	680	30
82	10	67	6.6×11×6.1	25	25	2,650	6,270	110	1,020	35
96	13	78	9×14×8.1			3,430	8,040	147	1,570	40
116	13	98	9×14×8.1			6,080	15,900	397	3,600	50
134	18	112	11×17×11.1			7,550	20,000	530	4,500	60

1N ≅ 0.102kgf 1N·m ≅ 0.102kgf·m


SMKC TYPE

– Center Mount Square Flange Type –

This type is a metric dimension series widely used in Japan and other countries.

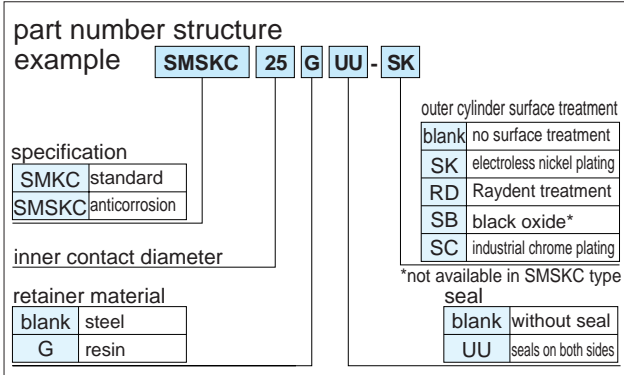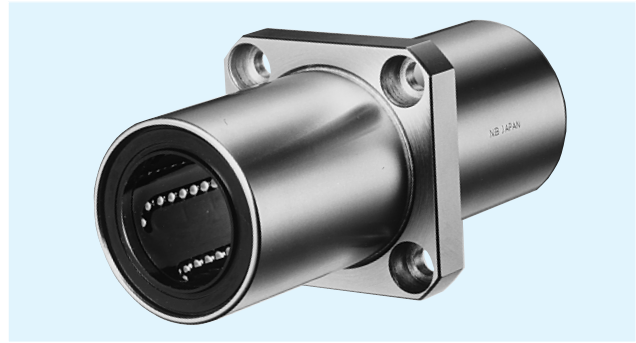

part number									
standard		anticorrosion		dr		D		L	ℓ
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	mm
SMKC 6	SMKC 6G	SMSKC 6	SMSKC 6G	6		12	0	35	15
SMKC 8	SMKC 8G	SMSKC 8	SMSKC 8G	8		15	-13	45	20
SMKC10	SMKC10G	SMSKC10	SMSKC10G	10	0	19		55	24.5
SMKC12	SMKC12G	SMSKC12	SMSKC12G	12	-10	21	0	57	25.5
SMKC13	SMKC13G	SMSKC13	SMSKC13G	13		23	-16	61	27.5
SMKC16	SMKC16G	SMSKC16	SMSKC16G	16		28		70	32
SMKC20	SMKC20G	SMSKC20	SMSKC20G	20	0	32	0	80	36
SMKC25	SMKC25G	SMSKC25	SMSKC25G	25		40		112	52
SMKC30	SMKC30G	SMSKC30	SMSKC30G	30	-12	45	-19	123	56.5
SMKC35	SMKC35G	SMSKC35	SMSKC35G	35	0	52	0	135	62.5
SMKC40	SMKC40G	SMSKC40	SMSKC40G	40		60		151	69
SMKC50	SMKC50G	SMSKC50	SMSKC50G	50	-15	80	-22	192	89.5
SMKC60	SMKC60G	SMSKC60	SMSKC60G	60	0/-20	90	0/-25	209	95.5

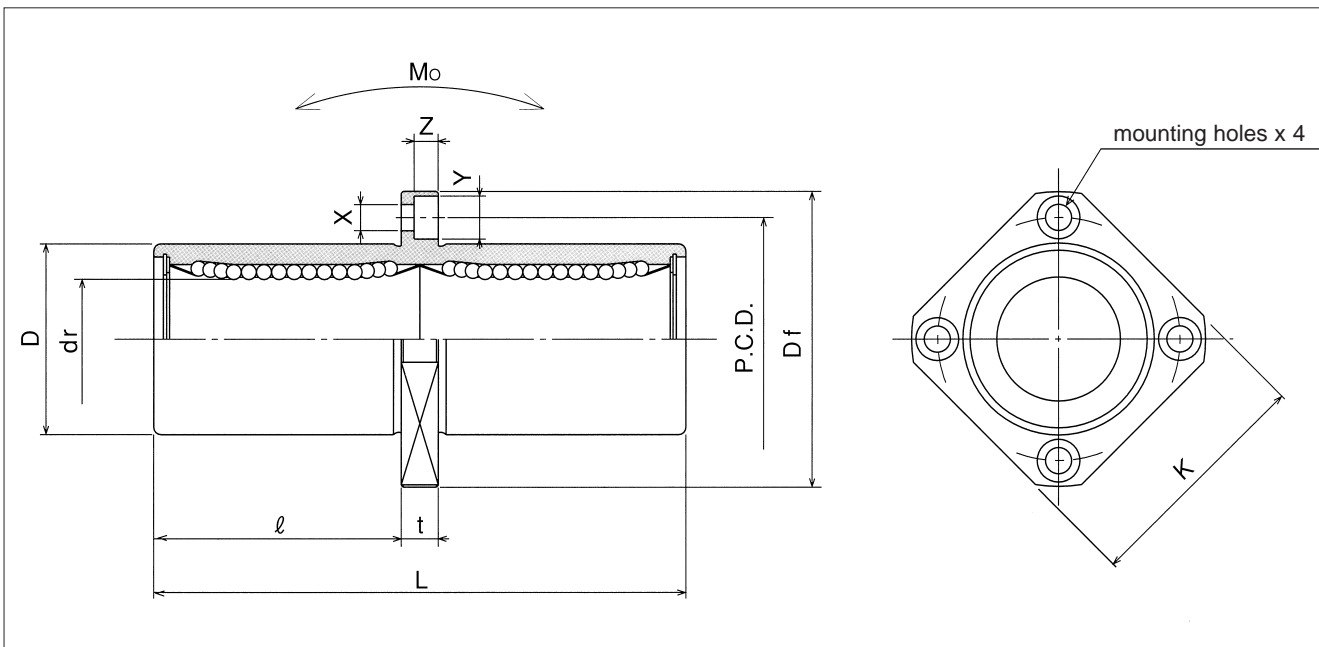


major dimensions					eccentricity μm	perpen- dicularity μm	basic load rating		allowable static moment Mo $\text{N}\cdot\text{m}$	mass g	shaft diameter mm
flange							dynamic C N	static Co N			
Df mm	K mm	t mm	P.C.D. mm	X×Y×Z mm							
28	22	5	20	3.5×6×3.1	15	15	323	530	2.18	25	6
32	25	5	24	3.5×6×3.1			431	784	4.31	43	8
40	30	6	29	4.5×7.5×4.1			588	1,100	7.24	78	10
42	32	6	32	4.5×7.5×4.1			813	1,570	10.9	90	12
43	34	6	33	4.5×7.5×4.1			813	1,570	11.6	108	13
48	37	6	38	4.5×7.5×4.1			1,230	2,350	19.7	165	16
54	42	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	225	20
62	50	8	51	5.5×9×5.1			1,560	3,140	43.4	500	25
74	58	10	60	6.6×11×6.1			2,490	5,490	82.8	590	30
82	64	10	67	6.6×11×6.1	25	25	2,650	6,270	110	930	35
96	75	13	78	9×14×8.1			3,430	8,040	147	1,380	40
116	92	13	98	9×14×8.1			6,080	15,900	397	3,400	50
134	106	18	112	11×17×11.1			7,550	20,000	530	4,060	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

SMTC TYPE


– Two Side Cut Center Flange Type –

This type is a metric dimension series widely used in Japan and other countries.

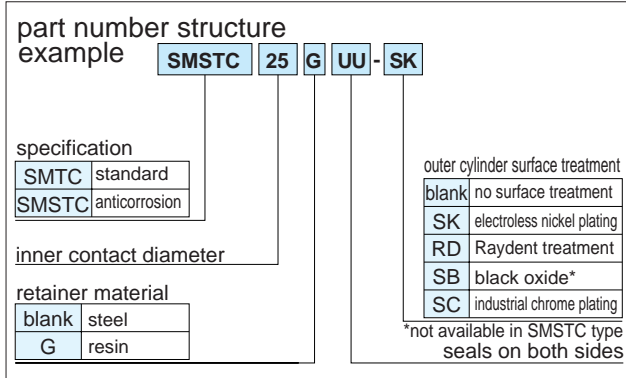

part number*										
standard		anticorrosion		dr		D		L		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	± 0.3	ℓ	Df
								mm	mm	mm
SMTC 6UU	SMTC 6GUU	SMSTC 6UU	SMSTC 6GUU	6		12	0	35	15	28
SMTC 8UU	SMTC 8GUU	SMSTC 8UU	SMSTC 8GUU	8		15	-13	45	20	32
SMTC10UU	SMTC10GUU	SMSTC10UU	SMSTC10GUU	10	0	19		55	24.5	40
SMTC12UU	SMTC12GUU	SMSTC12UU	SMSTC12GUU	12	-10	21	0	57	25.5	42
SMTC13UU	SMTC13GUU	SMSTC13UU	SMSTC13GUU	13		23	-16	61	27.5	43
SMTC16UU	SMTC16GUU	SMSTC16UU	SMSTC16GUU	16		28		70	32	48
SMTC20UU	SMTC20GUU	SMSTC20UU	SMSTC20GUU	20	0	32	0	80	36	54
SMTC25UU	SMTC25GUU	SMSTC25UU	SMSTC25GUU	25		40		112	52	62
SMTC30UU	SMTC30GUU	SMSTC30UU	SMSTC30GUU	30	-12	45	-19	123	56.5	74

* UU type is standard.

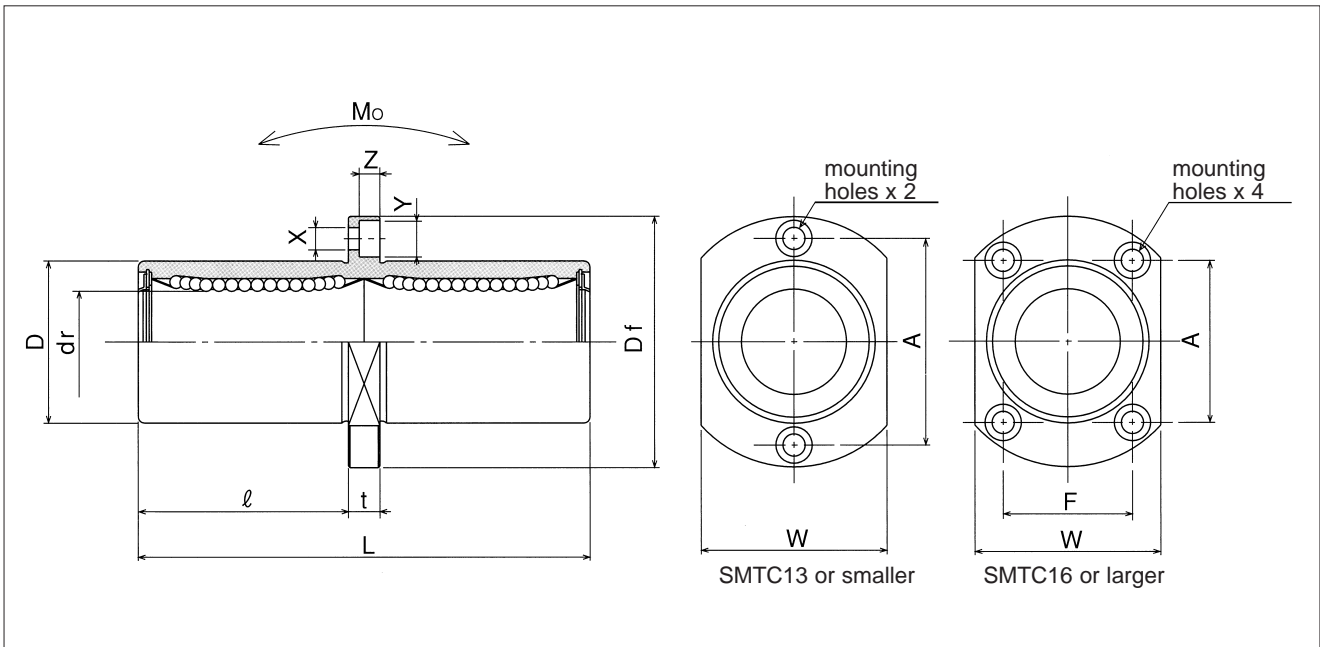


major dimensions					eccentricity μm	perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N}\cdot\text{m}$	mass g	shaft diameter mm
flange							dynamic C N	static C_o N			
W mm	t mm	A mm	F mm	$X\times Y\times Z$ mm							
18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
34	6	31	22	4.5×7.5×4.1	20	20	1,230	2,350	19.7	182	16
38	8	36	24	5.5×9×5.1			1,400	2,740	26.8	247	20
46	8	40	32	5.5×9×5.1			1,560	3,140	43.4	525	25
51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N≐0.102kgf 1N·m≐0.102kgf·m

SMF-W-E TYPE


— Round Flange Double-Wide Pilot End Type —

This type is a metric dimension series widely used in Japan and other countries.

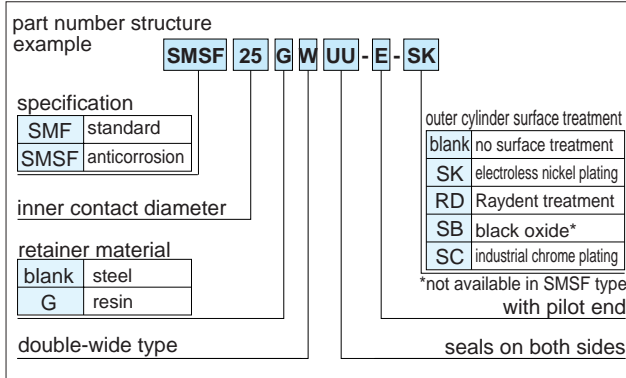

part number*									
standard		anticorrosion		dr		D		L	ℓ
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	mm
SMF 6WUU-E	SMF 6GWUU-E	SMSF 6WUU-E	SMSF 6GWUU-E	6		12	0	35	5
SMF 8WUU-E	SMF 8GWUU-E	SMSF 8WUU-E	SMSF 8GWUU-E	8		15	-13	45	5
SMF10WUU-E	SMF10GWUU-E	SMSF10WUU-E	SMSF10GWUU-E	10	0	19		55	6
SMF12WUU-E	SMF12GWUU-E	SMSF12WUU-E	SMSF12GWUU-E	12	-10	21	0	57	6
SMF13WUU-E	SMF13GWUU-E	SMSF13WUU-E	SMSF13GWUU-E	13		23	-16	61	6
SMF16WUU-E	SMF16GWUU-E	SMSF16WUU-E	SMSF16GWUU-E	16		28		70	6
SMF20WUU-E	SMF20GWUU-E	SMSF20WUU-E	SMSF20GWUU-E	20	0	32	0	80	8
SMF25WUU-E	SMF25GWUU-E	SMSF25WUU-E	SMSF25GWUU-E	25		40		112	8
SMF30WUU-E	SMF30GWUU-E	SMSF30WUU-E	SMSF30GWUU-E	30	-12	45	-19	123	10
SMF35WUU-E	SMF35GWUU-E	—	—	35	0	52	0	135	10
SMF40WUU-E	SMF40GWUU-E	—	—	40		60		151	13
SMF50WUU-E	SMF50GWUU-E	—	—	50	-15	80	-22	192	13
SMF60WUU-E	SMF60GWUU-E	—	—	60	0/-20	90	0/-25	209	18

* UU type is standard.

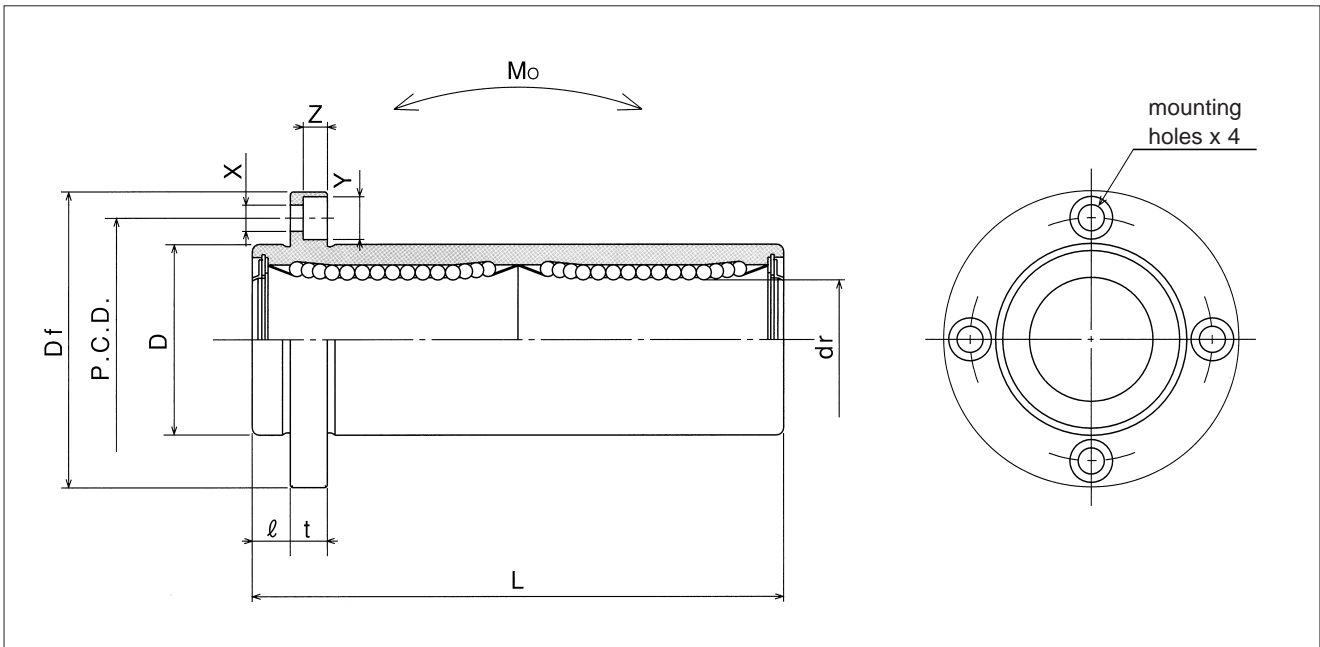


major dimensions				eccentricity	perpendicularity	basic load rating		allowable static moment Mo	mass	shaft diameter
flange						dynamic	static			
Df	t	P.C.D.	X×Y×Z	μm	μm			C	Co	N·m
mm	mm	mm	mm			N	N			
28	5	20	3.5×6×3.1	15	15	323	530	2.18	31	6
32	5	24	3.5×6×3.1			431	784	4.31	51	8
40	6	29	4.5×7.5×4.1			588	1,100	7.24	98	10
42	6	32	4.5×7.5×4.1			813	1,570	10.9	110	12
43	6	33	4.5×7.5×4.1			813	1,570	11.6	130	13
48	6	38	4.5×7.5×4.1			1,230	2,350	19.7	190	16
54	8	43	5.5×9×5.1	20	20	1,400	2,740	26.8	260	20
62	8	51	5.5×9×5.1			1,560	3,140	43.4	540	25
74	10	60	6.6×11×6.1			2,490	5,490	82.8	680	30
82	10	67	6.6×11×6.1	25	25	2,650	6,270	110	1,020	35
96	13	78	9×14×8.1			3,430	8,040	147	1,570	40
116	13	98	9×14×8.1			6,080	15,900	397	3,600	50
134	18	112	11×17×11.1			7,550	20,000	530	4,500	60

1N≐0.102kgf 1N·m≐0.102kgf·m

SMK-W-E TYPE


— Square Flange Double-Wide Pilot End Type —

This type is a metric dimension series widely used in Japan and other countries.

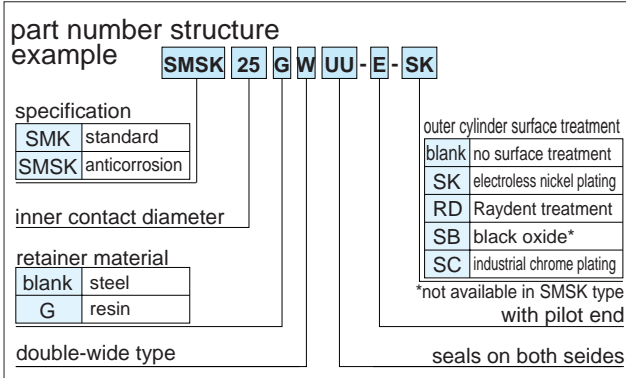

part number*									
standard		anticorrosion		dr		D		L	ℓ
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	mm
SMK 6WUU-E	SMK 6GWUU-E	SMSK 6WUU-E	SMSK 6GWUU-E	6	0	12	0	35	5
SMK 8WUU-E	SMK 8GWUU-E	SMSK 8WUU-E	SMSK 8GWUU-E	8		15	-13	45	5
SMK10WUU-E	SMK10GWUU-E	SMSK10WUU-E	SMSK10GWUU-E	10		19	0	55	6
SMK12WUU-E	SMK12GWUU-E	SMSK12WUU-E	SMSK12GWUU-E	12		21		57	6
SMK13WUU-E	SMK13GWUU-E	SMSK13WUU-E	SMSK13GWUU-E	13	-10	23	-16	61	6
SMK16WUU-E	SMK16GWUU-E	SMSK16WUU-E	SMSK16GWUU-E	16		28	70	6	
SMK20WUU-E	SMK20GWUU-E	SMSK20WUU-E	SMSK20GWUU-E	20	0	32	0	80	8
SMK25WUU-E	SMK25GWUU-E	SMSK25WUU-E	SMSK25GWUU-E	25		40		112	8
SMK30WUU-E	SMK30GWUU-E	SMSK30WUU-E	SMSK30GWUU-E	30	-12	45	-19	123	10
SMK35WUU-E	SMK35GWUU-E	—	—	35		52	0	135	10
SMK40WUU-E	SMK40GWUU-E	—	—	40	0	60	0	151	13
SMK50WUU-E	SMK50GWUU-E	—	—	50		80		-22	192
SMK60WUU-E	SMK60GWUU-E	—	—	60	0/-20	90	0/-25	209	18

* UU type is standard.

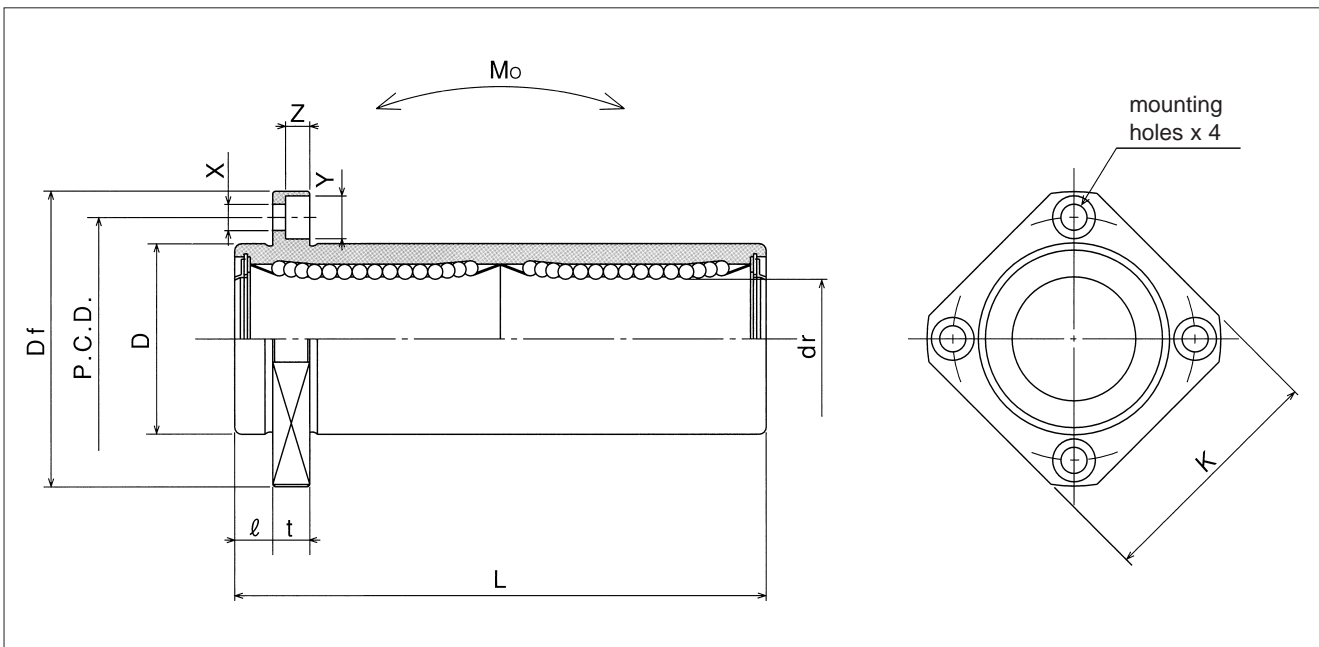


major dimensions					eccentricity μm	perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N}\cdot\text{m}$	mass g	shaft diameter mm
flange							dynamic C N	static C_o N			
D_f mm	K mm	t mm	P.C.D. mm	$X\times Y\times Z$ mm							
28	22	5	20	3.5×6×3.1	15	15	323	530	2.18	25	6
32	25	5	24	3.5×6×3.1			431	784	4.31	43	8
40	30	6	29	4.5×7.5×4.1			588	1,100	7.24	78	10
42	32	6	32	4.5×7.5×4.1			813	1,570	10.9	90	12
43	34	6	33	4.5×7.5×4.1			813	1,570	11.6	108	13
48	37	6	38	4.5×7.5×4.1	20	20	1,230	2,350	19.7	165	16
54	42	8	43	5.5×9×5.1			1,400	2,740	26.8	225	20
62	50	8	51	5.5×9×5.1			1,560	3,140	43.4	500	25
74	58	10	60	6.6×11×6.1	25	25	2,490	5,490	82.8	590	30
82	64	10	67	6.6×11×6.1			2,650	6,270	110	930	35
96	75	13	78	9×14×8.1			3,430	8,040	147	1,380	40
116	92	13	98	9×14×8.1	30	30	6,080	15,900	397	3,400	50
134	106	18	112	11×17×11.1			7,550	20,000	530	4,060	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

SMT-W-E TYPE


— Two Side Cut Double-Wide Flange Pilot End Type —

This type is a metric dimension series widely used in Japan and other countries.

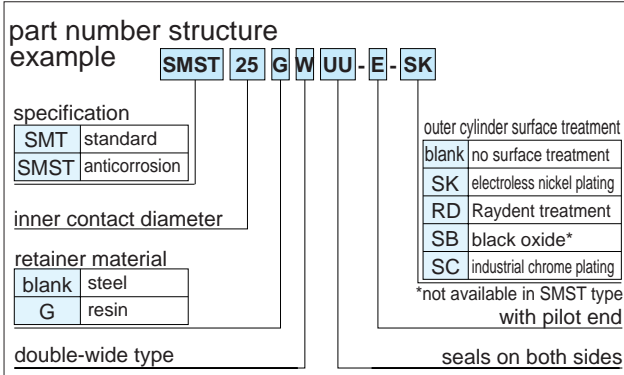

part number*										
standard		anticorrosion		dr		D		L		
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	ℓ mm	Df mm
SMT 6WUU-E	SMT 6GWUU-E	SMST 6WUU-E	SMST 6GWUU-E	6		12	0	35	5	28
SMT 8WUU-E	SMT 8GWUU-E	SMST 8WUU-E	SMST 8GWUU-E	8		15	-13	45	5	32
SMT10WUU-E	SMT10GWUU-E	SMST10WUU-E	SMST10GWUU-E	10	0	19		55	6	40
SMT12WUU-E	SMT12GWUU-E	SMST12WUU-E	SMST12GWUU-E	12	-10	21	0	57	6	42
SMT13WUU-E	SMT13GWUU-E	SMST13WUU-E	SMST13GWUU-E	13		23	-16	61	6	43
SMT16WUU-E	SMT16GWUU-E	SMST16WUU-E	SMST16GWUU-E	16		28		70	6	48
SMT20WUU-E	SMT20GWUU-E	SMST20WUU-E	SMST20GWUU-E	20	0	32	0	80	8	54
SMT25WUU-E	SMT25GWUU-E	SMST25WUU-E	SMST25GWUU-E	25		40		112	8	62
SMT30WUU-E	SMT30GWUU-E	SMST30WUU-E	SMST30GWUU-E	30	-12	45	-19	123	10	74

* UU type is standard feature.

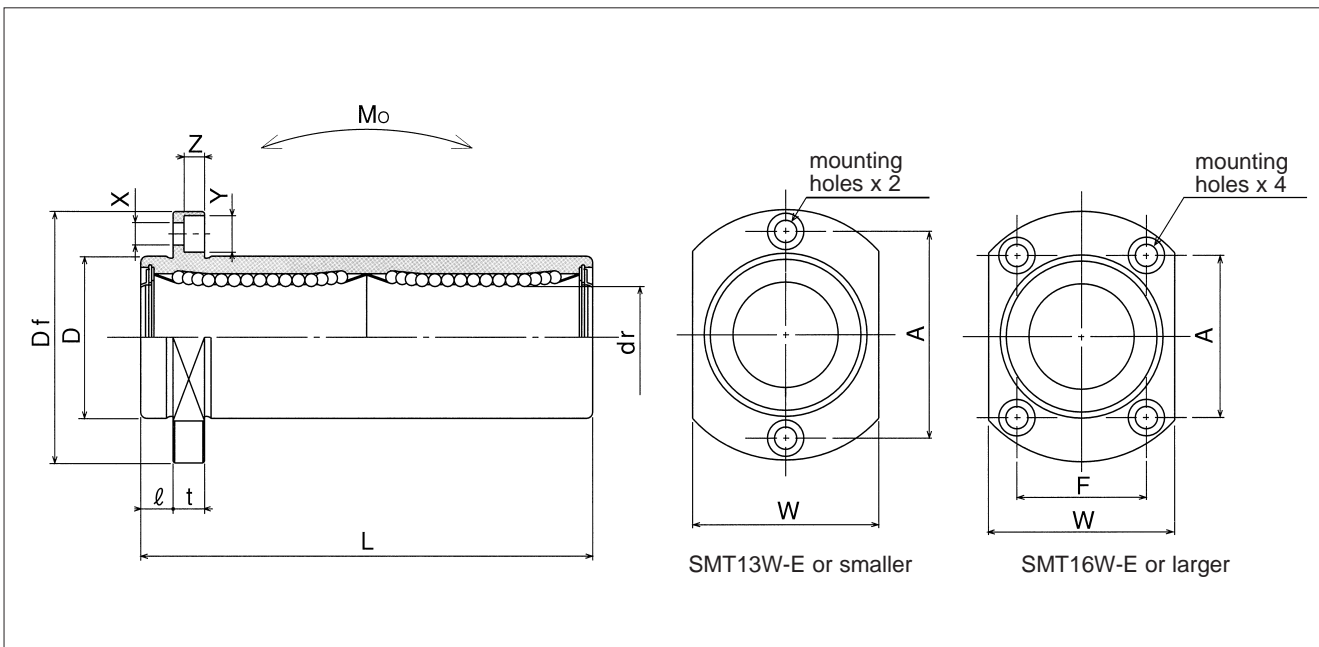



major dimensions					eccentricity	perpen- dicularity	basic load rating		allowable static moment Mo	mass	shaft diameter
flange							dynamic	static			
W mm	t mm	A mm	F mm	X×Y×Z mm	μm	μm			C N	Co N	N·m
18	5	20	—	3.5×6×3.1	15	15	323	530	2.18	28	6
21	5	24	—	3.5×6×3.1			431	784	4.31	47	8
25	6	29	—	4.5×7.5×4.1			588	1,100	7.24	90	10
27	6	32	—	4.5×7.5×4.1			813	1,570	10.9	102	12
29	6	33	—	4.5×7.5×4.1			813	1,570	11.6	123	13
34	6	31	22	4.5×7.5×4.1			1,230	2,350	19.7	182	16
38	8	36	24	5.5×9×5.1	20	20	1,400	2,740	26.8	247	20
46	8	40	32	5.5×9×5.1			1,560	3,140	43.4	525	25
51	10	49	35	6.6×11×6.1			2,490	5,490	82.8	645	30

1N≒0.102kgf 1N·m≒0.102kgf·m

TRF TYPE

– Triple-Wide Round Flange Type –

This type is a metric dimension series widely used in Japan and other countries.

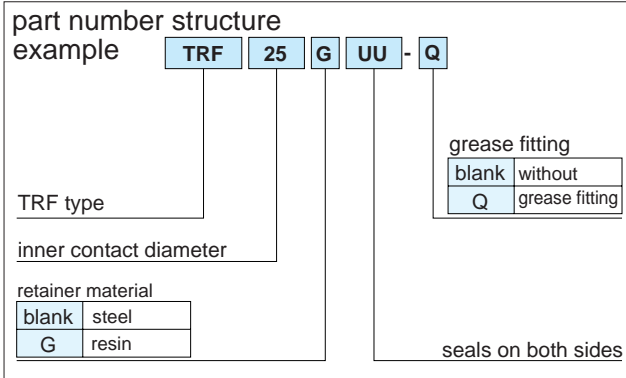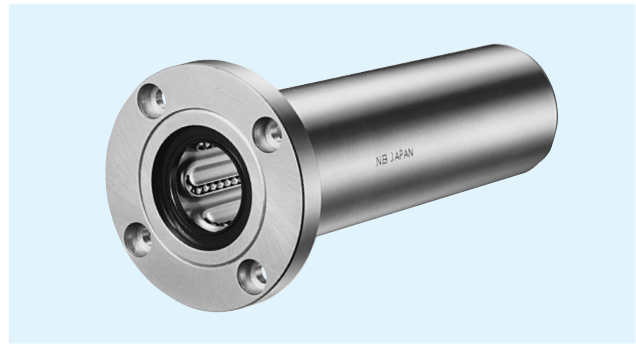


part number*							
steel retainer	resin retainer	dr		D		L	Df
		mm	tolerance μm	mm	tolerance μm	±0.3 mm	
TRF 6UU	TRF 6GUU	6	0	15	0/-18	51	32
TRF 8UU	TRF 8GUU	8	-12	19	0	66	40
TRF10UU	TRF10GUU	10	-15	23		80	43
TRF12UU	TRF12GUU	12	0	26	-21	84	46
TRF13UU	TRF13GUU	13	-15	28	0	90	48
TRF16UU	TRF16GUU	16	-18	32		103	54
TRF20UU	TRF20GUU	20	0	40	-25	118	62
TRF25UU	TRF25GUU	25	-18	45	0	165	74
TRF30UU	TRF30GUU	30	0	52		182	82
TRF35UU	TRF35GUU	35	-21	60	-30	200	96
TRF40UU	TRF40GUU	40	0	65	0	230	101
TRF50UU	TRF50GUU	50	-21	85		290	129
TRF60UU	TRF60GUU	60	0/-25	100	-35	310	144

* UU type is standard feature.

** Outer cylinder is treated with electroless nickel plating.

*** TRF6-8: A-MT6x1 TRF10-30: A-M6F TRF35-60: A-PT1/8

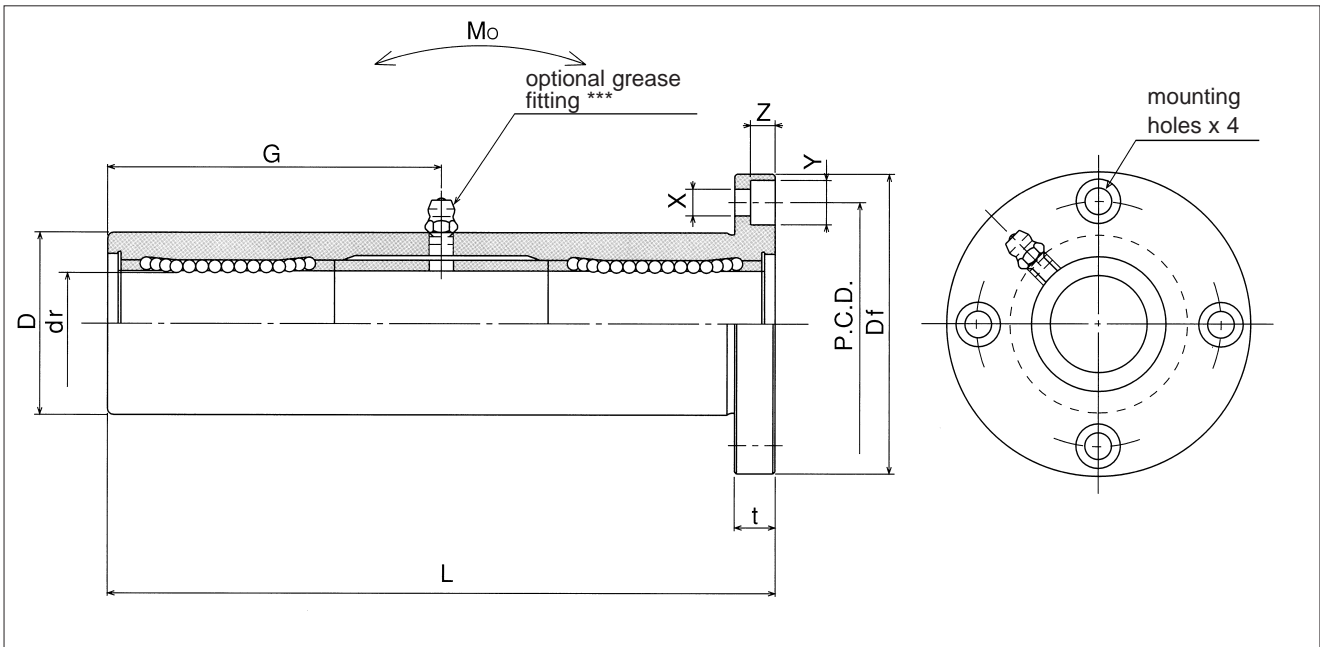



major dimensions			grease fitting	eccentricity	perpendicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						G	dynamic			
t	P.C.D.	X×Y×Z	μm	μm	C			Co	Mo	g
5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	412	16
8	51	5.5×9×5.1	59			1,400	2,740	98.0	752	20
10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
13	78	9×14×8.1	100	30	30	2,650	6,270	373	2,580	35
13	83	9×14×8.1	115			3,430	8,040	553	2,950	40
18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60

1N≐0.102kgf 1N·m≐0.102kgf·m

TRK TYPE

– Triple-Wide Square Flange Type –

This type is a metric dimension series widely used in Japan and other countries.

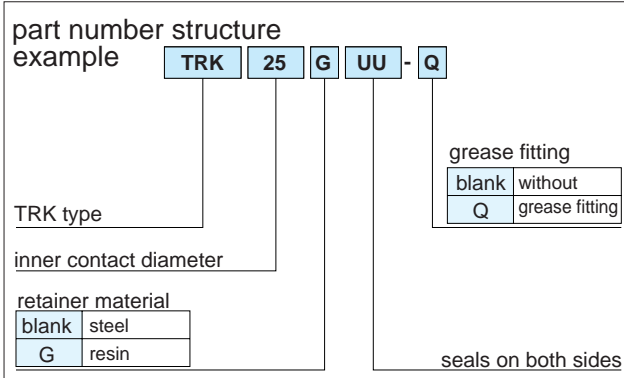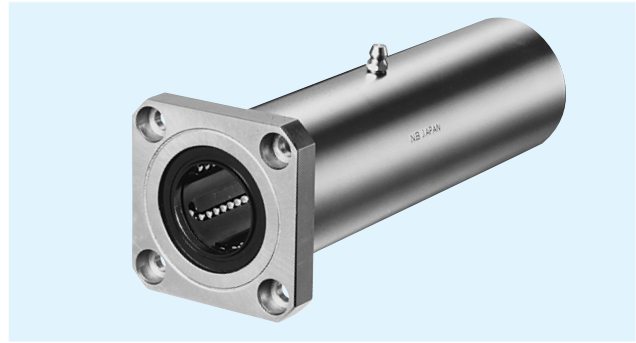


part number*		dr		D		L	Df
steel retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	mm
TRK 6UU	TRK 6GUU	6	0	15	0/-18	51	32
TRK 8UU	TRK 8GUU	8	-12	19	0	66	40
TRK10UU	TRK10GUU	10	-15	23		80	43
TRK12UU	TRK12GUU	12		0	26	-21	84
TRK13UU	TRK13GUU	13	-18	28	0	90	48
TRK16UU	TRK16GUU	16		32		103	54
TRK20UU	TRK20GUU	20	0	40	-25	118	62
TRK25UU	TRK25GUU	25	-18	45		165	74
TRK30UU	TRK30GUU	30	0	52	0	182	82
TRK35UU	TRK35GUU	35		60		200	96
TRK40UU	TRK40GUU	40	-21	65	-30	230	101
TRK50UU	TRK50GUU	50	0	85		290	129
TRK60UU	TRK60GUU	60	0/-25	100	-35	310	144

* UU type is standard feature.

** Outer cylinder is electroless nickel plated.

*** TRK6~8: A-MT6x1 TRK10~30: A-M6F TRK35~60: A-PT1/8

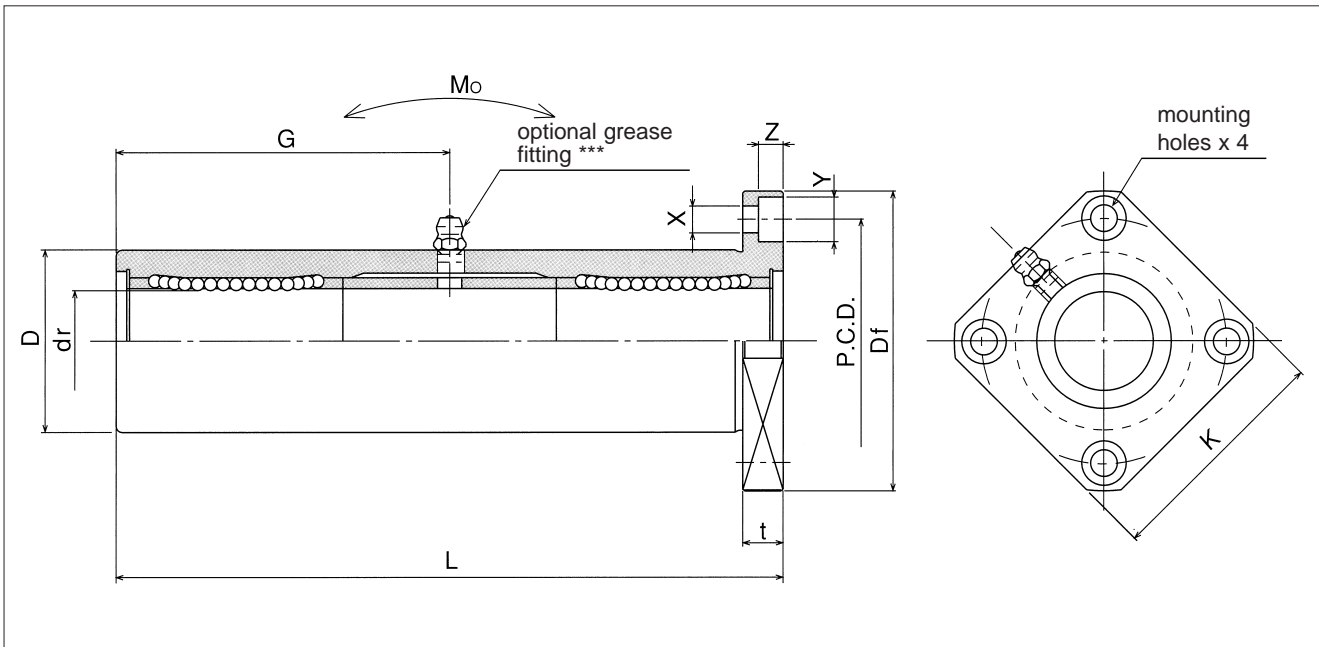


major dimensions				grease fitting	eccentricity	perpen- dicularity	basic load rating		allowable static moment	mass	shaft diameter
flange			G				dynamic	static			
K	t	P.C.D.		X×Y×Z	μm	μm			C	Co	Mo
25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6
30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8
34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10
35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12
37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13
42	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	376	16
50	8	51	5.5×9×5.1	59			1,400	2,740	98.0	714	20
58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25
64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30
75	13	78	9×14×8.1	100	30	30	2,650	6,270	373	2,400	35
80	13	83	9×14×8.1	115			3,430	8,040	553	2,510	40
100	18	107	11×17×11.1	145			6,080	15,900	1,370	6,400	50
116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60

1N ≅ 0.102kgf 1N·m ≅ 0.102kgf·m

TRFC TYPE

— Triple-Wide Intermediate Position Round Flange Type —

This type is a metric dimension series widely used in Japan and other countries.

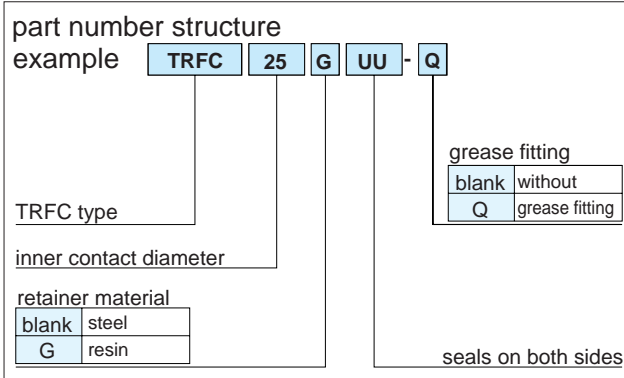


part number*							
steel retainer	resin retainer	dr		D		L	
		mm	tolerance μm	mm	tolerance μm	±0.3 mm	ℓ mm
TRFC 6UU	TRFC 6GUU	6	0	15	0/-18	51	17
TRFC 8UU	TRFC 8GUU	8	-12	19	0	66	22
TRFC10UU	TRFC10GUU	10	-15	23		80	27
TRFC12UU	TRFC12GUU	12		26		-21	84
TRFC13UU	TRFC13GUU	13	-18	28	0	90	30
TRFC16UU	TRFC16GUU	16		32		103	35
TRFC20UU	TRFC20GUU	20	0	40	-25	118	40
TRFC25UU	TRFC25GUU	25	-18	45		165	55
TRFC30UU	TRFC30GUU	30	0	52	0	182	61
TRFC35UU	TRFC35GUU	35		60		200	67
TRFC40UU	TRFC40GUU	40	-21	65	-30	230	77
TRFC50UU	TRFC50GUU	50		85		290	97
TRFC60UU	TRFC60GUU	60	0/-25	100	-35	310	104

* UU type seal is standard feature.

** Outer cylinder is electroless nickel plated.

*** TRFC6~8: A-MT6x1 TRFC10~30: A-M6F TRFC35~60: A-PT1/8

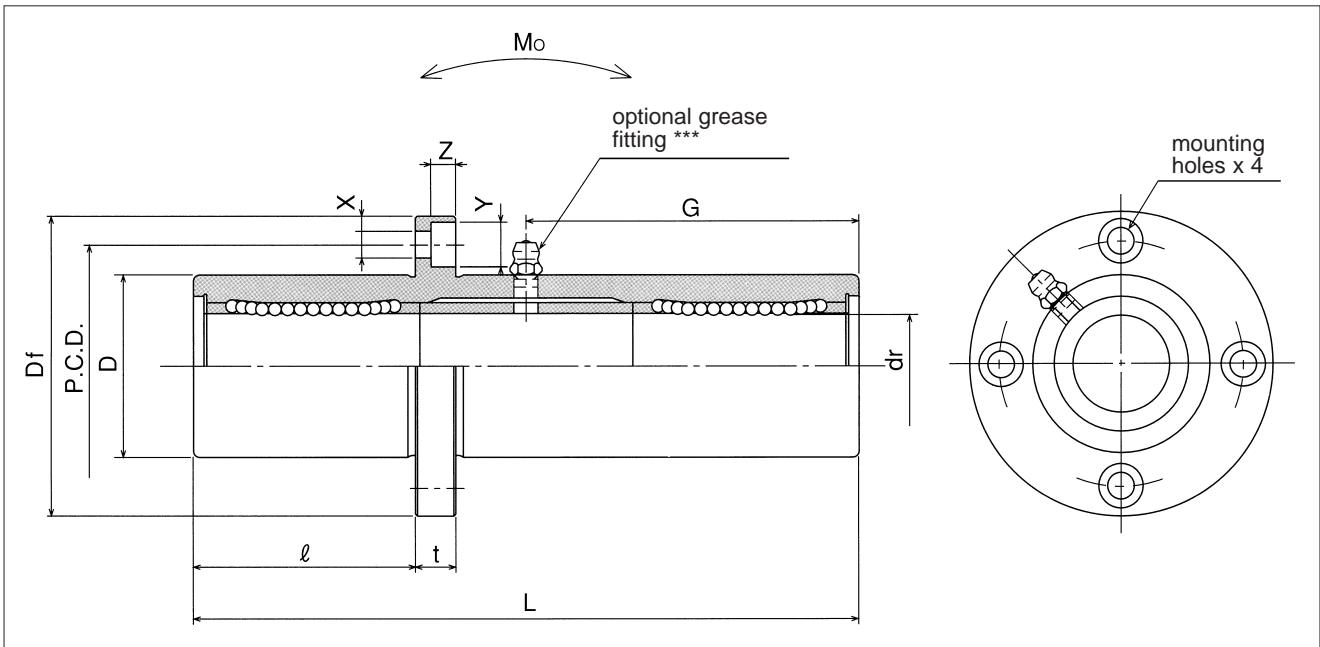


major dimensions				grease fitting G mm	eccentricity μm	perpen- dicularity μm	basic load rating		allowable static moment Mo N · m	mass g	shaft diameter mm
Df mm	t mm	P.C.D. mm	X × Y × Z mm				C N	Co N			
32	5	24	3.5 × 6 × 3.1	20.5	20	20	323	530	8.2	66	6
40	6	29	4.5 × 7.5 × 4.1	29			431	784	16.0	135	8
43	6	33	4.5 × 7.5 × 4.1	38			588	1,100	27.0	205	10
46	6	36	4.5 × 7.5 × 4.1	41			813	1,570	40.1	248	12
48	6	38	4.5 × 7.5 × 4.1	45			813	1,570	42.9	308	13
54	8	43	5.5 × 9 × 5.1	51	25	25	1,230	2,350	73.5	412	16
62	8	51	5.5 × 9 × 5.1	59			1,400	2,740	98.0	752	20
74	10	60	6.6 × 11 × 6.1	82.5			1,560	3,140	157	1,244	25
82	10	67	6.6 × 11 × 6.1	91			2,490	5,490	297	1,636	30
96	13	78	9 × 14 × 8.1	100	30	30	2,650	6,270	373	2,580	35
101	13	83	9 × 14 × 8.1	115			3,430	8,040	553	2,950	40
129	18	107	11 × 17 × 11.1	145			6,080	15,900	1,370	6,860	50
144	18	122	11 × 17 × 11.1	155			7,550	20,000	1,800	9,660	60

1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

TRKC TYPE

— Triple-Wide Intermediate Position Square Flange Type —

This type is a metric dimension series widely used in Japan and other countries.

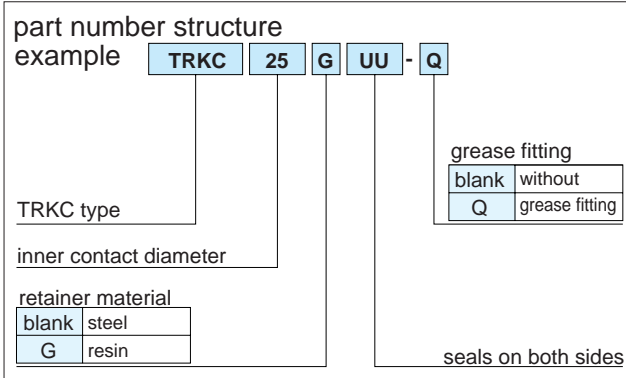


part number*							
steel retainer	resin retainer	dr		D		L	
		mm	tolerance μm	mm	tolerance μm	±0.3 mm	ℓ mm
TRKC 6UU	TRKC 6GUU	6	0	15	0/-18	51	17
TRKC 8UU	TRKC 8GUU	8	-12	19	0	66	22
TRKC10UU	TRKC10GUU	10	-12	23		80	27
TRKC12UU	TRKC12GUU	12	0	26	-21	84	28
TRKC13UU	TRKC13GUU	13	-15	28	0	90	30
TRKC16UU	TRKC16GUU	16	-15	32		103	35
TRKC20UU	TRKC20GUU	20	0	40	-25	118	40
TRKC25UU	TRKC25GUU	25	0	45	-25	165	55
TRKC30UU	TRKC30GUU	30	-18	52		182	61
TRKC35UU	TRKC35GUU	35	0	60	0	200	67
TRKC40UU	TRKC40GUU	40	-21	65	-30	230	77
TRKC50UU	TRKC50GUU	50	-21	85	0	290	97
TRKC60UU	TRKC60GUU	60	0/-25	100	-35	310	104

* UU type is standard feature.

** Outer cylinder is electroless nickel plated.

*** TRKC6~8: A-MT6x1 TRKC10~30: A-M6F TRKC35~60: A-PT1/8

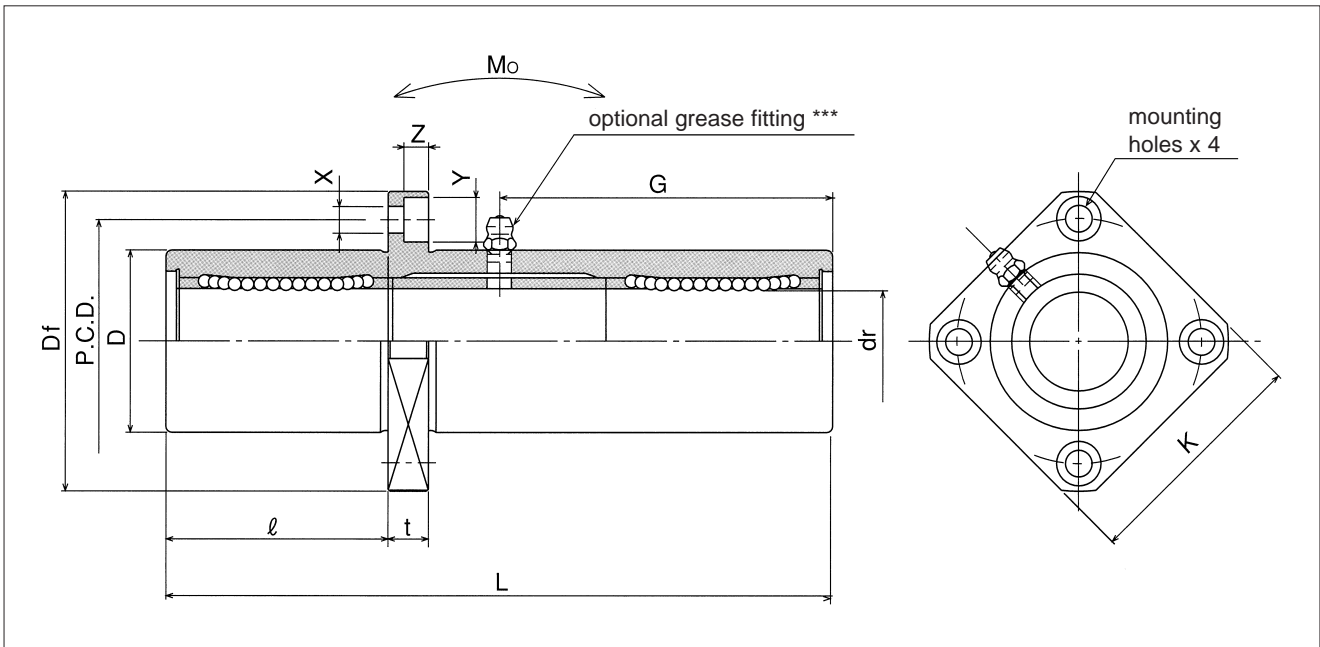


major dimensions					grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment M_o $\text{N}\cdot\text{m}$	mass g	shaft diameter mm
flange								C N	Co N			
D_f mm	K mm	t mm	P.C.D. mm	X×Y×Z mm								
32	25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6
40	30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8
43	34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10
46	35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12
48	37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13
54	42	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	376	16
62	50	8	51	5.5×9×5.1	59			1,400	2,740	98.0	714	20
74	58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25
82	64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30
96	75	13	78	9×14×8.1	100			2,650	6,270	373	2,400	35
101	80	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,510	40
129	100	18	107	11×17×11.1	145			6,080	15,900	1,370	6,400	50
144	116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

TRF-E TYPE

— Triple-Wide Round Flange Pilot End Type —

This type is a metric dimension series widely used in Japan and other countries.

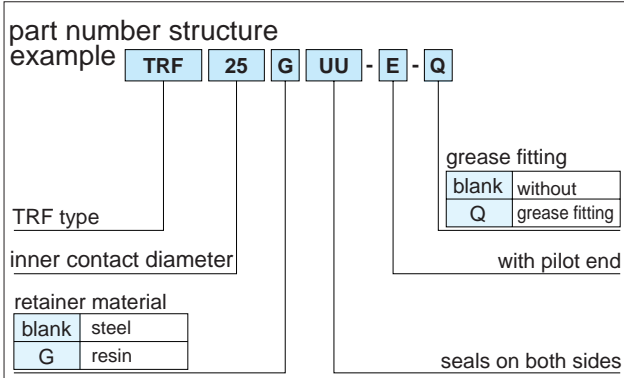


part number*							
steel retainer	resin retainer	dr		D		L	ℓ
		mm	tolerance μm	mm	tolerance μm	±0.3 mm	
TRF 6UU-E	TRF 6GUU-E	6	0	15	0/-18	51	5
TRF 8UU-E	TRF 8GUU-E	8	-12	19	0	66	6
TRF10UU-E	TRF10GUU-E	10	-15	23		0	80
TRF12UU-E	TRF12GUU-E	12		0	26	-21	84
TRF13UU-E	TRF13GUU-E	13	-18	28	0	90	6
TRF16UU-E	TRF16GUU-E	16		0		32	-25
TRF20UU-E	TRF20GUU-E	20	0	40	-30	118	8
TRF25UU-E	TRF25GUU-E	25	-18	45		0	165
TRF30UU-E	TRF30GUU-E	30	-21	52	0	182	10
TRF35UU-E	TRF35GUU-E	35		0	60	-30	200
TRF40UU-E	TRF40GUU-E	40	-25	65	0	230	13
TRF50UU-E	TRF50GUU-E	50		0		85	0
TRF60UU-E	TRF60GUU-E	60	0/-25	100	-35	310	18

* UU type is standard feature.

** Outer cylinder is electroless nickel plated.

*** TRF6~8-E: A-MT6x1 TRF10~30-E: A-M6F TRF35~60-E: A-PT1/8

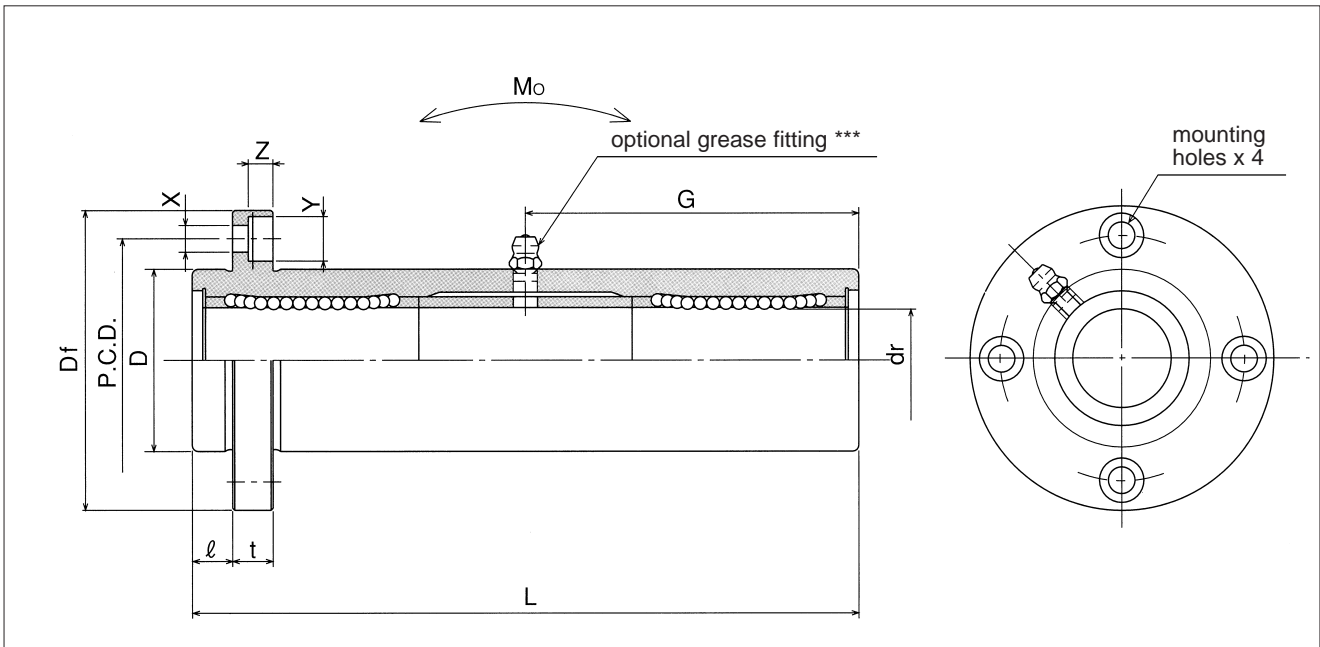



major dimensions				grease fitting G mm	eccentricity μm	perpen- dicularity μm	basic load rating		allowable static moment M_o $\text{N} \cdot \text{m}$	mass g	shaft diameter mm
flange							dynamic C N	static C_o N			
D_f mm	t mm	P.C.D. mm	X×Y×Z mm								
32	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	66	6
40	6	29	4.5×7.5×4.1	29			431	784	16.0	135	8
43	6	33	4.5×7.5×4.1	38			588	1,100	27.0	205	10
46	6	36	4.5×7.5×4.1	41			813	1,570	40.1	248	12
48	6	38	4.5×7.5×4.1	45			813	1,570	42.9	308	13
54	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	412	16
62	8	51	5.5×9×5.1	59			1,400	2,740	98.0	752	20
74	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,244	25
82	10	67	6.6×11×6.1	91			2,490	5,490	297	1,636	30
96	13	78	9×14×8.1	100	30	30	2,650	6,270	373	2,580	35
101	13	83	9×14×8.1	115			3,430	8,040	553	2,950	40
129	18	107	11×17×11.1	145			6,080	15,900	1,370	6,860	50
144	18	122	11×17×11.1	155			7,550	20,000	1,800	9,660	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

TRK-E TYPE

– Triple-Wide Square Flange Pilot End Type –

This type is a metric dimension series widely used in Japan and other countries.

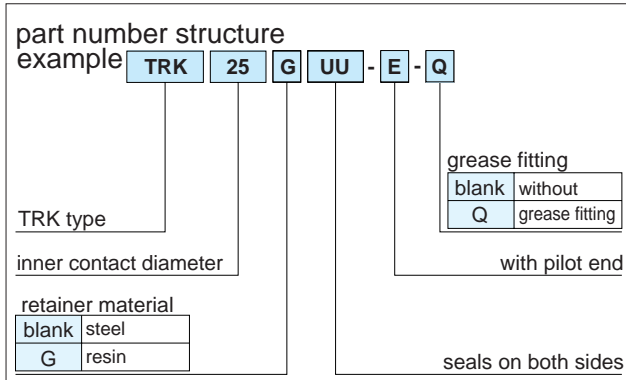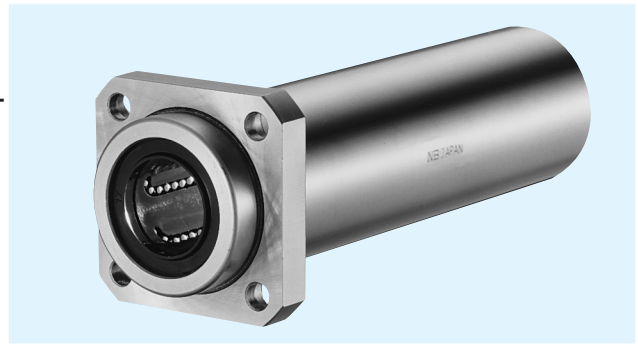


part number*							
steel retainer	resin retainer	dr		D		L	ℓ
		mm	tolerance μm	mm	tolerance μm	±0.3 mm	
TRK 6UU-E	TRK 6GUU-E	6	0	15	0/-18	51	5
TRK 8UU-E	TRK 8GUU-E	8	-12	19	0	66	6
TRK10UU-E	TRK10GUU-E	10	-15	23		80	6
TRK12UU-E	TRK12GUU-E	12		0	26	-21	84
TRK13UU-E	TRK13GUU-E	13	-18	28	0	90	6
TRK16UU-E	TRK16GUU-E	16		32		103	8
TRK20UU-E	TRK20GUU-E	20	0	40	-25	118	8
TRK25UU-E	TRK25GUU-E	25	-21	45	0	165	10
TRK30UU-E	TRK30GUU-E	30		52		182	10
TRK35UU-E	TRK35GUU-E	35	0	60	-30	200	13
TRK40UU-E	TRK40GUU-E	40	-25	65	0	230	13
TRK50UU-E	TRK50GUU-E	50		85		290	18
TRK60UU-E	TRK60GUU-E	60	0/-25	100	-35	310	18

* UU type is standard feature.

** Outer cylinder is electroless nickel plated.

*** TRK6-8-E: A-MT6x1 TRK10-30-E: A-M6F TRK35-60-E: A-PT1/8

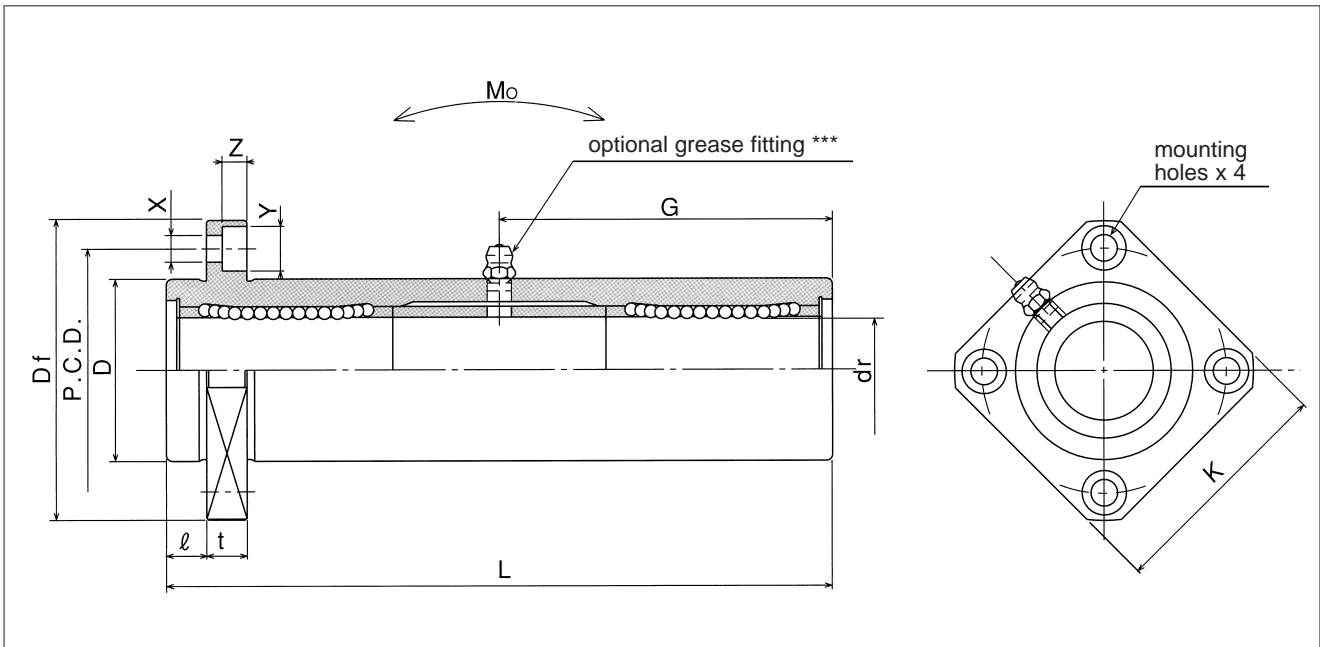


major dimensions					grease fitting G mm	eccentricity μm	perpendicularity μm	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter mm
Df mm	K mm	t mm	P.C.D. mm	X×Y×Z mm				C N	Co N			
32	25	5	24	3.5×6×3.1	20.5	20	20	323	530	8.2	58	6
40	30	6	29	4.5×7.5×4.1	29			431	784	16.0	117	8
43	34	6	33	4.5×7.5×4.1	38			588	1,100	27.0	189	10
46	35	6	36	4.5×7.5×4.1	41			813	1,570	40.1	228	12
48	37	6	38	4.5×7.5×4.1	45			813	1,570	42.9	286	13
54	42	8	43	5.5×9×5.1	51	25	25	1,230	2,350	73.5	376	16
62	50	8	51	5.5×9×5.1	59			1,400	2,740	98.0	714	20
74	58	10	60	6.6×11×6.1	82.5			1,560	3,140	157	1,163	25
82	64	10	67	6.6×11×6.1	91			2,490	5,490	297	1,543	30
96	75	13	78	9×14×8.1	100			2,650	6,270	373	2,400	35
101	80	13	83	9×14×8.1	115	30	30	3,430	8,040	553	2,510	40
129	100	18	107	11×17×11.1	145			6,080	15,900	1,370	6,400	50
144	116	18	122	11×17×11.1	155			7,550	20,000	1,800	9,200	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m


KB TYPE

– Standard Type –

This type is a metric dimension series generally used in Europe.

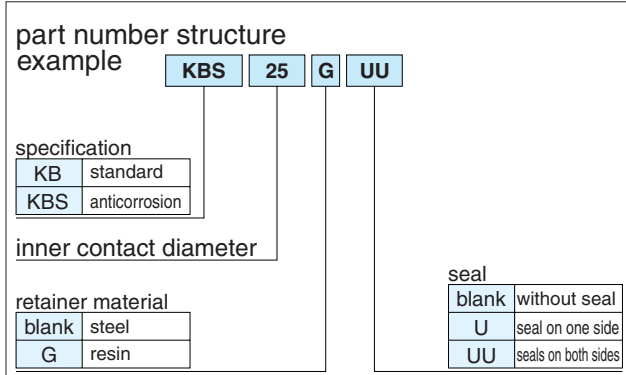

part number				number of ball circuits	D			
standard		anticorrosion			dr		D	
steel retainer	resin retainer	stainless retainer	resin retainer		mm	tolerance μm	mm	tolerance μm
KB 3	KB 3G	KBS 3	KBS 3G	4	3		7	
KB 4	KB 4G	KBS 4	KBS 4G	4	4		8	0
KB 5	KB 5G	KBS 5	KBS 5G	4	5	+ 8	12	- 8
KB 8	KB 8G	KBS 8	KBS 8G	4	8	0	16	
KB10	KB10G	KBS10	KBS10G	4	10		19	0
KB12	KB12G	KBS12	KBS12G	4	12		22	- 9
KB16	KB16G	KBS16	KBS16G	4	16	+ 9	26	
KB20	KB20G	KBS20	KBS20G	5	20	- 1	32	0
KB25	KB25G	KBS25	KBS25G	6	25	+11	40	-11
KB30	KB30G	KBS30	KBS30G	6	30	- 1	47	
KB40	KB40G	KBS40	KBS40G	6	40	+13	62	0
KB50	KB50G	KBS50	KBS50G	6	50	- 2	75	-13
KB60	KB60G	KBS60	KBS60G	6	60		90	0
KB80	—	—	—	6	80	+16/-4	120	-15

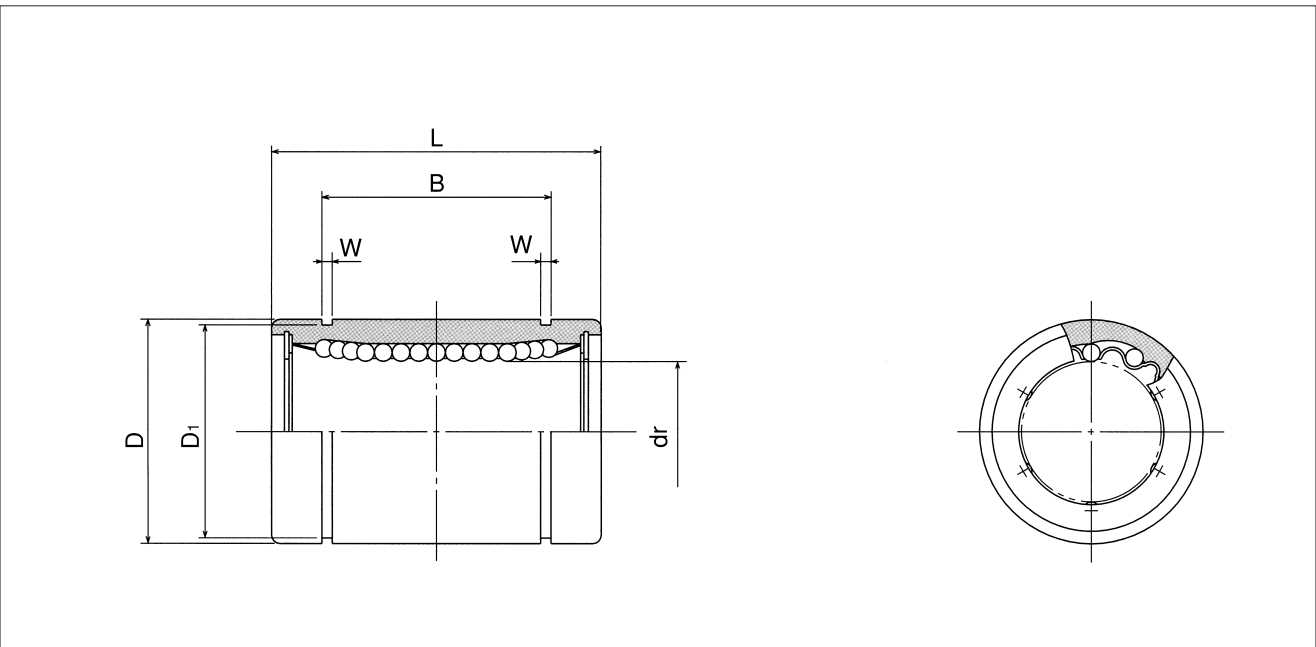


major dimensions						eccentricity μm	radial clearance (maximum) μm	basic load rating		mass g	shaft diameter mm
mm	L	B		W mm	D ₁ mm			dynamic C N	static C ₀ N		
	tolerance mm	mm	tolerance mm								
10	0	—	—	—	—	10	- 3	69	105	1.4	3
12	-0.12	—	—	—	—			88	127	2	4
22	0	14.5	0	1.1	11.5			12	- 4	206	265
25		16.5		1.1	15.2	265	402			22	8
29		22		1.3	18	372	549			36	10
32		-0.2		22.9	1.3	21	510			784	45
36	-0.2	24.9	-0.2	1.3	24.9	15	- 6	578	892	60	16
45		31.5		1.6	30.3			862	1,370	102	20
58		44.1		1.85	37.5			980	1,570	235	25
68	0	52.1	0	1.85	44.5	17	- 8	1,570	2,740	360	30
80	-0.3	60.6	-0.3	2.15	59			2,160	4,020	770	40
100	0	77.6	0	2.65	72	20	- 13	3,820	7,940	1,250	50
125		101.7		3.15	86.5			4,700	9,800	2,220	60
165		-0.4		133.7	-0.4			4.15	116	7,350	16,000

1N \approx 0.102kgf

KB-AJ TYPE


– Clearance Adjustable Type –

This type is a metric dimension series generally used in Europe.

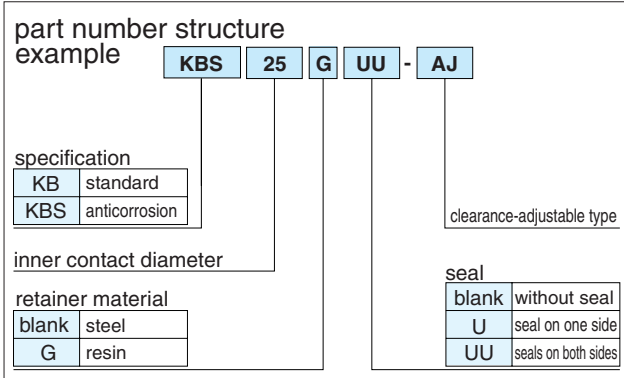

part number				number of ball circuits	D			
standard		anticorrosion			dr		D	
steel retainer	resin retainer	stainless retainer	resin retainer		mm	tolerance* μm	mm	tolerance* μm
—	KB 5G-AJ	—	KBS 5G-AJ	4	5	+ 8 0	12	0
—	KB 8G-AJ	—	KBS 8G-AJ	4	8		16	- 8
—	KB10G-AJ	—	KBS10G-AJ	4	10		19	0
KB12-AJ	KB12G-AJ	KBS12-AJ	KBS12G-AJ	4	12	+ 9 - 1	22	- 9
KB16-AJ	KB16G-AJ	KBS16-AJ	KBS16G-AJ	4	16		26	0
KB20-AJ	KB20G-AJ	KBS20-AJ	KBS20G-AJ	5	20		32	- 11
KB25-AJ	KB25G-AJ	KBS25-AJ	KBS25G-AJ	6	25	+11	40	0
KB30-AJ	KB30G-AJ	KBS30-AJ	KBS30G-AJ	6	30	- 1	47	- 11
KB40-AJ	KB40G-AJ	KBS40-AJ	KBS40G-AJ	6	40	+13 - 2	62	0
KB50-AJ	KB50G-AJ	KBS50-AJ	KBS50G-AJ	6	50		75	- 13
KB60-AJ	KB60G-AJ	KBS60-AJ	KBS60G-AJ	6	60		90	0
KB80-AJ	—	—	—	6	80	+16/-4	120	- 15

* Accuracy is measured prior to machining clearance slot.

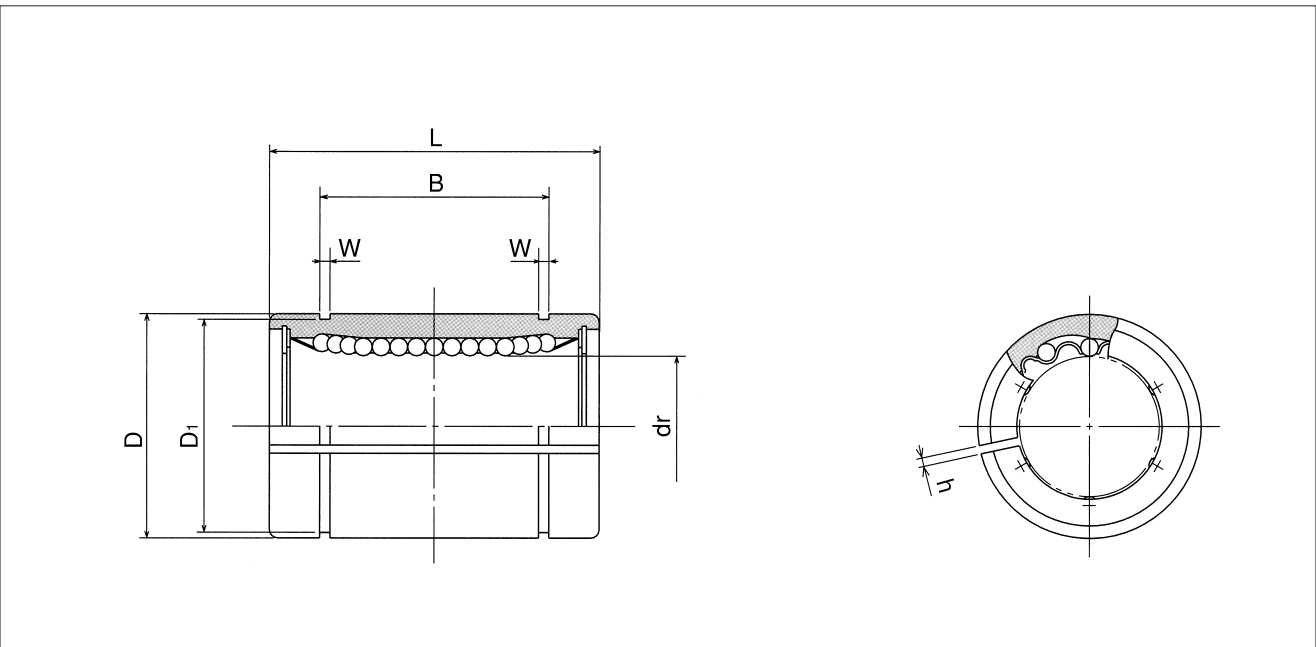



major dimensions							eccentricity* μm	basic load rating		mass g	shaft diameter mm
mm	L	mm	B	mm	D ₁	h		dynamic	static		
	tolerance mm		tolerance mm					C	C ₀		
22		14.5		1.1	11.5	1	12	206	265	10	5
25		16.5		1.1	15.2	1		265	402	19.5	8
29	0	22	0	1.3	18	1		372	549	29	10
32	-0.2	22.9	-0.2	1.3	21	1.5		510	784	44	12
36		24.9		1.3	24.9	1.5		578	892	59	16
45		31.5		1.6	30.3	2	15	862	1,370	100	20
58		44.1		1.85	37.5	2		980	1,570	230	25
68	0	52.1	0	1.85	44.5	2	17	1,570	2,740	355	30
80	-0.3	60.6	-0.3	2.15	59	3		2,160	4,020	758	40
100		77.6		2.65	72	3		3,820	7,940	1,230	50
125	0	101.7	0	3.15	86.5	3	20	4,700	9,800	2,170	60
165	-0.4	133.7	-0.4	4.15	116	3		7,350	16,000	5,000	80

1N ≙ 0.102kgf

KB-OP TYPE


— Open Type —

This type is a metric dimension series generally used in Europe.

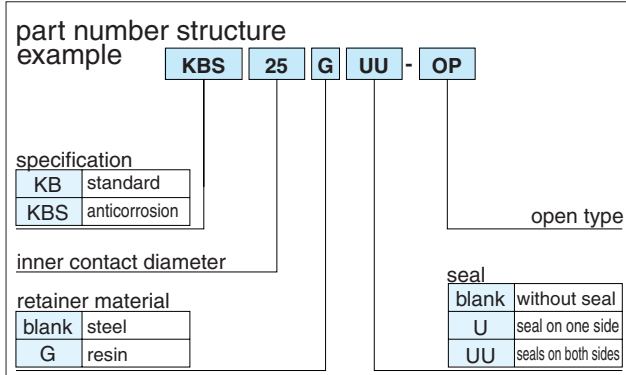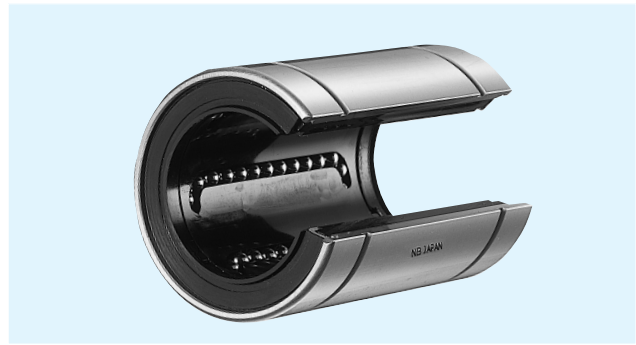

part number				number of ball circuits	D			
standard		anticorrosion			dr		D	
steel retainer	resin retainer	stainless retainer	resin retainer		mm	tolerance* μm	mm	tolerance* μm
—	KB10G-OP	—	KBS10G-OP	3	10	+ 8	19	0
KB12-OP	KB12G-OP	KBS12-OP	KBS12G-OP	3	12	0	22	- 9
KB16-OP	KB16G-OP	KBS16-OP	KBS16G-OP	3	16	+ 9	26	0
KB20-OP	KB20G-OP	KBS20-OP	KBS20G-OP	4	20	- 1	32	- 11
KB25-OP	KB25G-OP	KBS25-OP	KBS25G-OP	5	25	+ 11	40	0
KB30-OP	KB30G-OP	KBS30-OP	KBS30G-OP	5	30	- 1	47	- 11
KB40-OP	KB40G-OP	KBS40-OP	KBS40G-OP	5	40	+ 13	62	0
KB50-OP	KB50G-OP	KBS50-OP	KBS50G-OP	5	50	- 2	75	- 13
KB60-OP	KB60G-OP	KBS60-OP	KBS60G-OP	5	60		90	0
KB80-OP	—	—	—	5	80	+ 16/- 4	120	- 15

* Accuracy is measured prior to machining open slot.

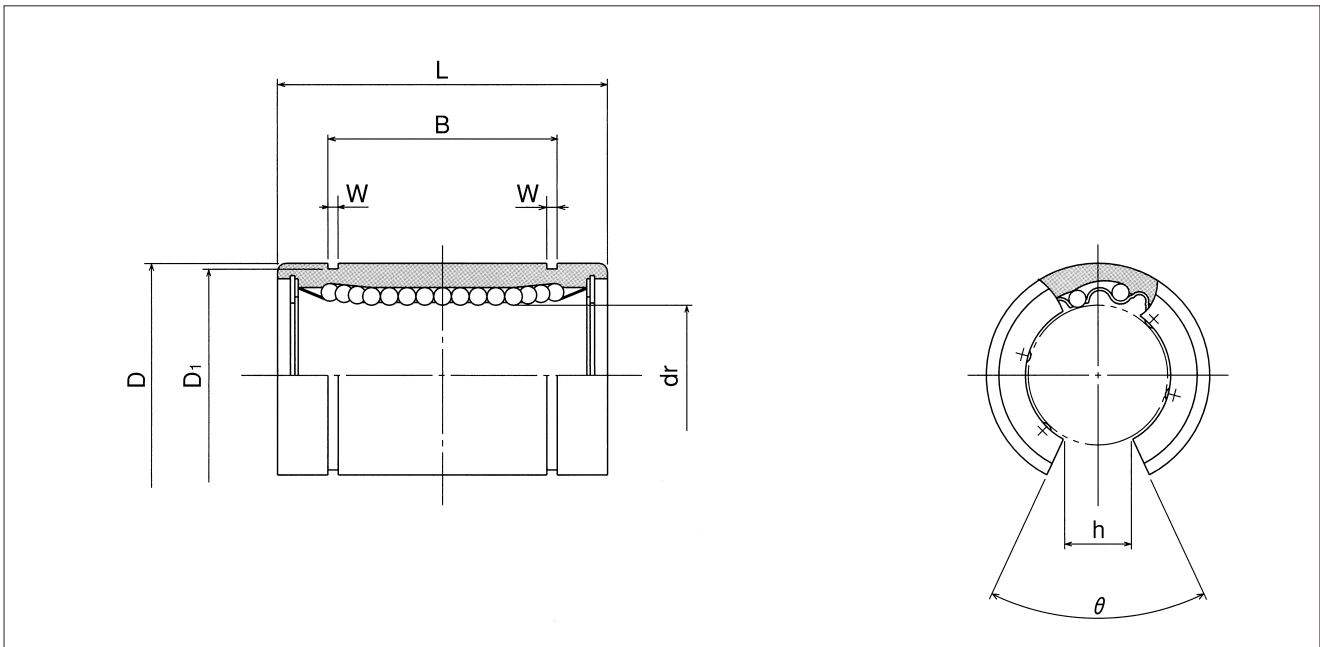



major dimensions								eccentricity μm	basic load rating		mass g	shaft diameter mm
mm	L	mm	B	mm	mm	mm	mm		mm	mm		
	tolerance mm		tolerance mm									
29		22		1.3	18	6.8	80°	12	372	549	23	10
32	0	22.9	0	1.3	21	7.5	78°		510	784	35	12
36	-0.2	24.9	-0.2	1.3	24.9	10	78°		578	892	48	16
45		31.5		1.6	30.3	10	60°	15	862	1,370	84	20
58		44.1		1.85	37.5	12.5	60°		980	1,570	195	25
68	0	52.1	0	1.85	44.5	12.5	50°		1,570	2,740	309	30
80	-0.3	60.6	-0.3	2.15	59	16.8	50°	17	2,160	4,020	665	40
100		77.6		2.65	72	21	50°		3,820	7,940	1,080	50
125	0	101.7	0	3.15	86.5	27.2	54°	20	4,700	9,800	1,900	60
165	-0.4	133.7	-0.4	4.15	116	36.3	54°		7,350	16,000	4,380	80

1N \approx 0.102kgf


KB-W TYPE

— Double-Wide Type —

This type is a metric dimension series generally used in Europe.

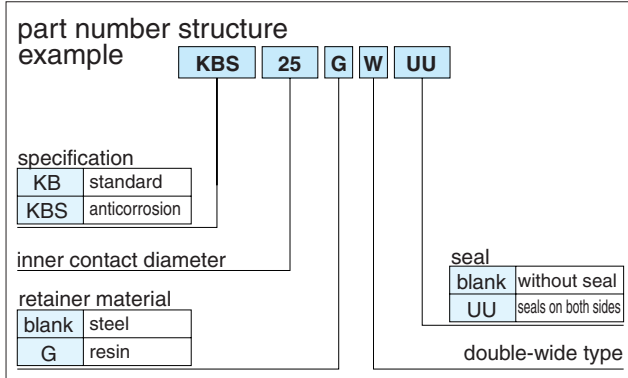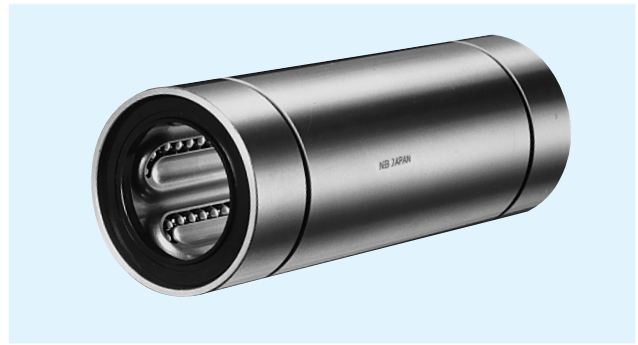

part number				number of ball circuits	D			
standard		anticorrosion			dr		D	
steel retainer	resin retainer	stainless retainer	resin retainer		mm	tolerance μm	mm	tolerance μm
KB 8W	KB 8GW	KBS 8W	KBS 8GW	4	8	+ 9	16	0/-9
KB12W	KB12GW	KBS12W	KBS12GW	4	12	- 1	22	0
KB16W	KB16GW	KBS16W	KBS16GW	4	16	+11	26	-11
KB20W	KB20GW	KBS20W	KBS20GW	5	20	- 1	32	0
KB25W	KB25GW	KBS25W	KBS25GW	6	25	+13	40	-13
KB30W	KB30GW	KBS30W	KBS30GW	6	30	- 2	47	0
KB40W	KB40GW	KBS40W	KBS40GW	6	40	+16	62	-15
KB50W	KB50GW	KBS50W	KBS50GW	6	50	- 4	75	0/-20
KB60W	KB60GW	KBS60W	KBS60GW	6	60		90	

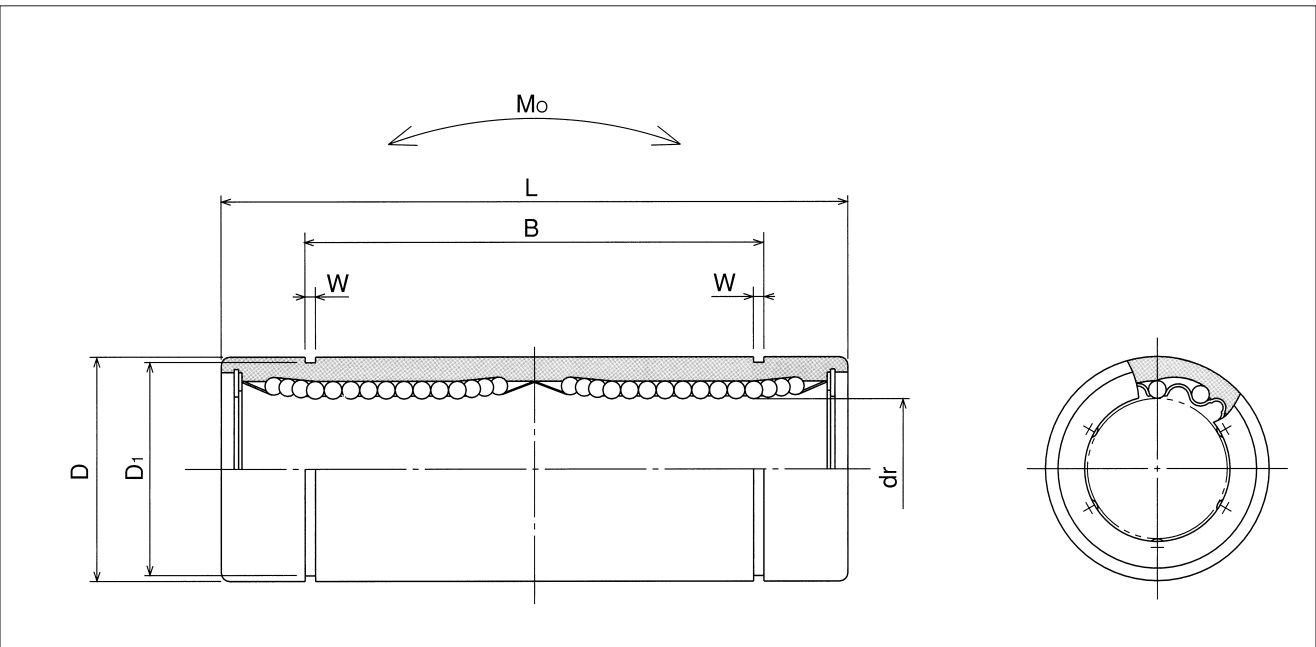



major dimensions						eccentricity	basic load rating		Allowable static moment Mo	mass	shaft diameter
L	B	W	D_1	dynamic	static		C	Co			
mm	tolerance mm	mm	tolerance mm	mm	mm	μm	N	N	$N \cdot m$	g	mm
46		33		1.1	15.2	15	421	804	4.3	40	8
61	0	45.8	0	1.3	21		813	1,570	11.7	80	12
68	-0.3	49.8	-0.3	1.3	24.9		921	1,780	14.2	115	16
80		61		1.6	30.5	17	1,370	2,740	25.0	180	20
112		82		1.85	38		1,570	3,140	44.0	430	25
123	0	104.2	0	1.85	44.5		2,500	5,490	78.9	615	30
151	-0.4	121.2	-0.4	2.15	59	20	3,430	8,040	147	1,400	40
192		155.2		2.65	72		6,080	15,900	396	2,320	50
209		170		3.15	86.5		7,550	20,000	487	3,920	60

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m


KBF TYPE

— Round Flange Type —

This type is a metric dimension series generally used in Europe.

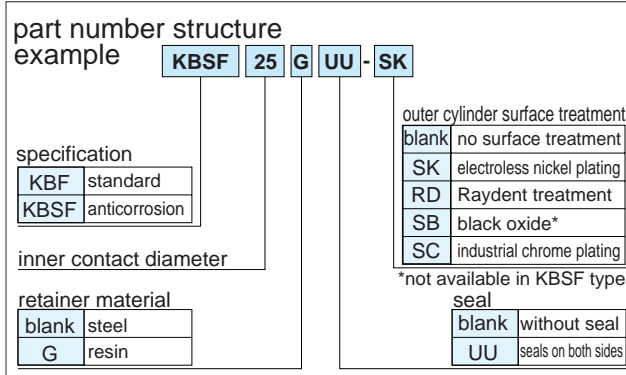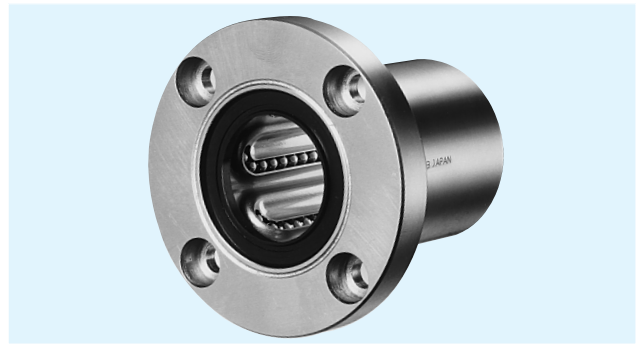

part number				dr		D		L
standard		anticorrosion		mm	tolerance μm	mm	tolerance μm	±0.3 mm
steel retainer	resin retainer	stainless retainer	resin retainer					
—	KBF 5G	—	KBSF 5G	5	+ 8	12	0	22
KBF 8	KBF 8G	KBSF 8	KBSF 8G	8	0	16	-13	25
KBF12	KBF12G	KBSF12	KBSF12G	12	0	22	0	32
KBF16	KBF16G	KBSF16	KBSF16G	16	+ 9	26	-16	36
KBF20	KBF20G	KBSF20	KBSF20G	20	- 1	32	0	45
KBF25	KBF25G	KBSF25	KBSF25G	25	+11	40	-19	58
KBF30	KBF30G	KBSF30	KBSF30G	30	- 1	47	0	68
KBF40	KBF40G	KBSF40	KBSF40G	40	+13	62	-22	80
KBF50	KBF50G	KBSF50	KBSF50G	50	- 2	75	0	100
KBF60	KBF60G	KBSF60	KBSF60G	60	+16/-4	90	-25	125
KBF80	—	—	—	80		120		165

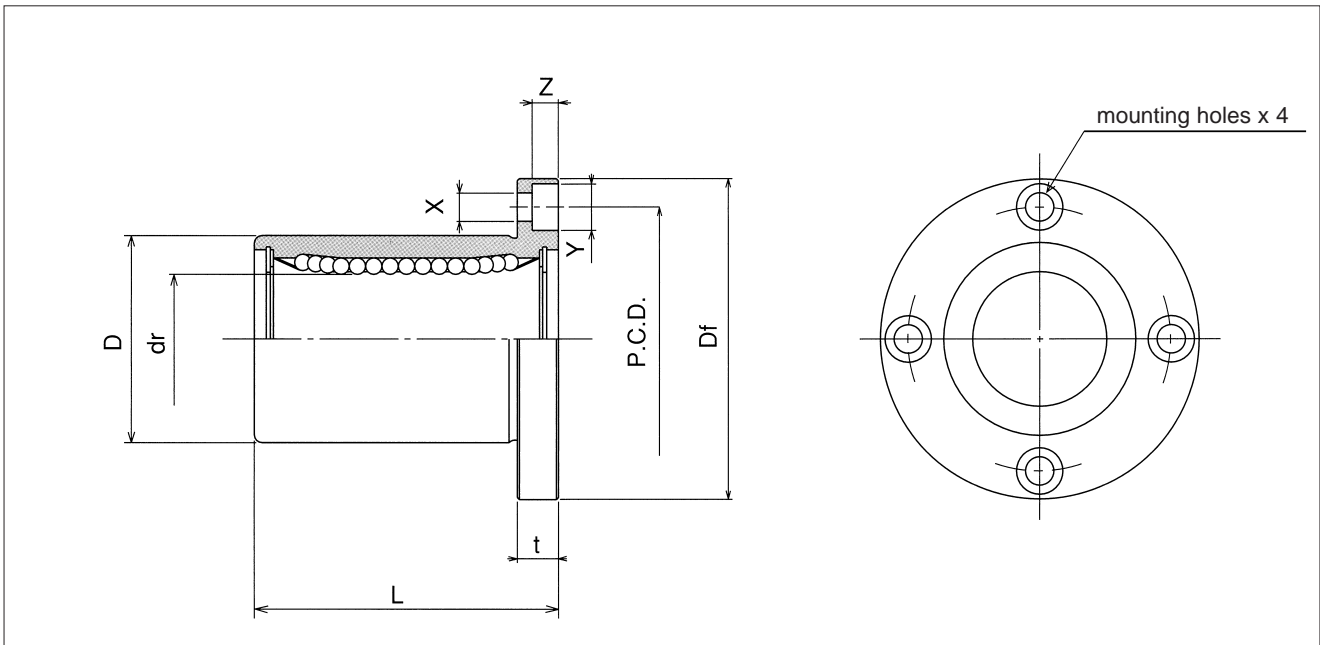


major dimensions				eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange						dynamic C N	static Co N		
Df mm	t mm	P.C.D. mm	X×Y×Z mm	μm	μm			g	mm
28	5	20	3.5×6×3.1	12	12	206	265	26	5
32	5	24	3.5×6×3.1			265	402	41	8
42	6	32	4.5×7.5×4.1			510	784	80	12
46	6	36	4.5×7.5×4.1			578	892	103	16
54	8	43	5.5×9×5.1	15	15	862	1,370	182	20
62	8	51	5.5×9×5.1			980	1,570	335	25
76	10	62	6.6×11×6.1	17	17	1,570	2,740	560	30
98	13	80	9×14×8.1			2,160	4,020	1,175	40
112	13	94	9×14×8.1			3,820	7,940	1,745	50
134	18	112	11×17×11.1	20	20	4,700	9,800	3,220	60
164	18	142	11×17×11.1			7,350	16,000	6,420	80

1N≐0.102kgf

KBK TYPE


— Square Flange Type —

This type is a metric dimension series generally used in Europe.

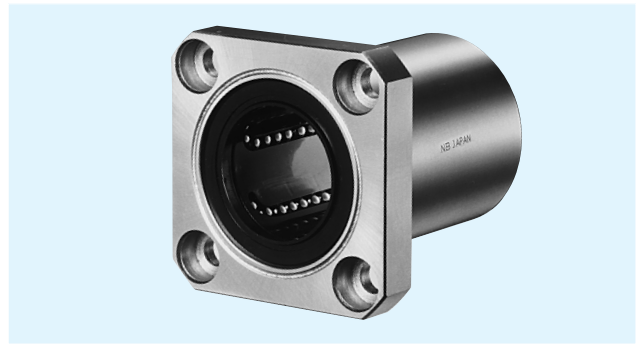

part number structure		example	
		KBSK	25 G UU - SK
specification			
KBK	standard		
KBSK	anticorrosion		
inner contact diameter			
retainer material			
blank	steel		
G	resin		
		outer cylinder surface treatment	
		blank	no surface treatment
		SK	electroless nickel plating
		RD	Raydent treatment
		SB	black oxide*
		SC	industrial chrome plating
		*not available in KBSK type	
		seal	
		blank	without seal
		UU	seals on both sides

part number								
standard		anticorrosion		dr		D		L
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm
—	KBK 5G	—	KBSK 5G	5	+ 8	12	0	22
KBK 8	KBK 8G	KBSK 8	KBSK 8G	8	0	16	-13	25
KBK12	KBK12G	KBSK12	KBSK12G	12		22	0	32
KBK16	KBK16G	KBSK16	KBSK16G	16	+ 9	26	-16	36
KBK20	KBK20G	KBSK20	KBSK20G	20	- 1	32	0	45
KBK25	KBK25G	KBSK25	KBSK25G	25	+11	40	-19	58
KBK30	KBK30G	KBSK30	KBSK30G	30	- 1	47	0	68
KBK40	KBK40G	KBSK40	KBSK40G	40	+13	62	-22	80
KBK50	KBK50G	KBSK50	KBSK50G	50	- 2	75	0	100
KBK60	KBK60G	KBSK60	KBSK60G	60		90	-25	125
KBK80	—	—	—	80	+16/-4	120		165

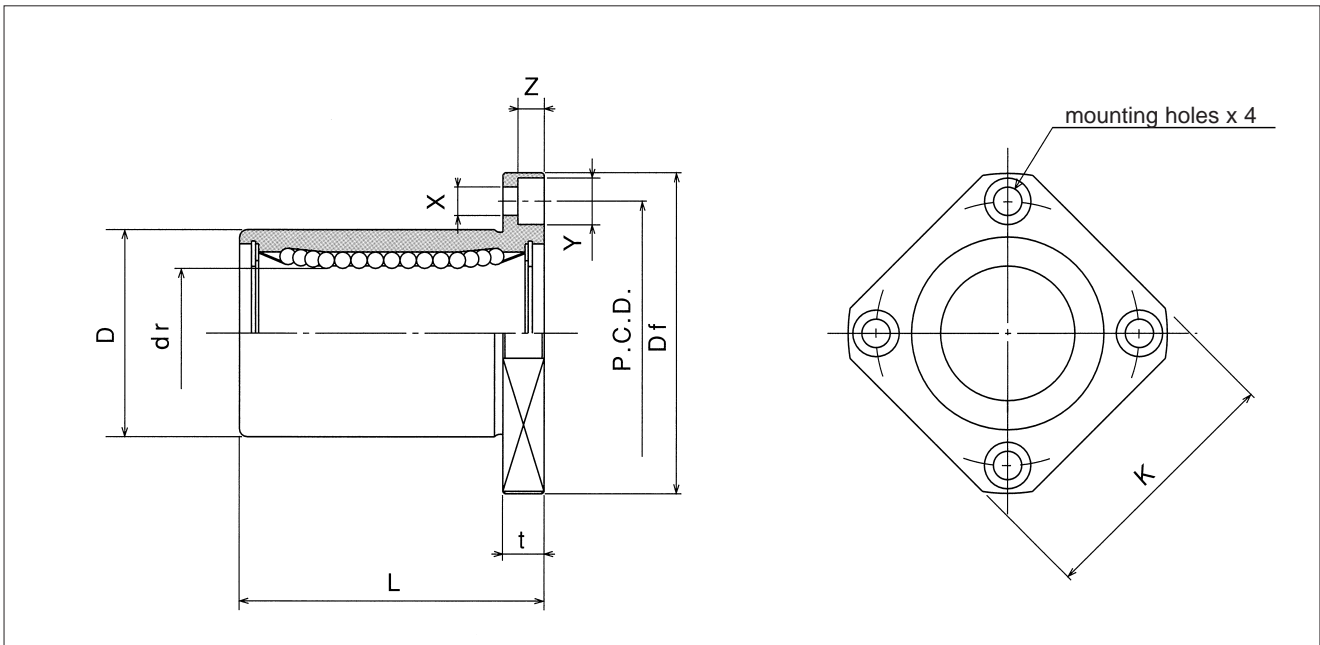


major dimensions					eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange							dynamic	static		
Df	K	t	P.C.D.	X×Y×Z	C	Co			g	mm
mm	mm	mm	mm	mm	μm	μm	N	N	mm	
28	22	5	20	3.5×6×3.1	12	12	206	265	20	5
32	25	5	24	3.5×6×3.1			265	402	33	8
42	32	6	32	4.5×7.5×4.1			510	784	64	12
46	35	6	36	4.5×7.5×4.1			578	892	90	16
54	42	8	43	5.5×9×5.1	15	15	862	1,370	147	20
62	50	8	51	5.5×9×5.1			980	1,570	295	25
76	60	10	62	6.6×11×6.1	17	17	1,570	2,740	465	30
98	75	13	80	9×14×8.1			2,160	4,020	975	40
112	88	13	94	9×14×8.1			3,820	7,940	1,545	50
134	106	18	112	11×17×11.1	20	20	4,700	9,800	2,780	60
164	136	18	142	11×17×11.1			7,350	16,000	5,920	80

1N≐0.102kgf

KBT TYPE


— Two Side Cut Flange Type —

KBT type is a metric dimension series generally used in Europe.

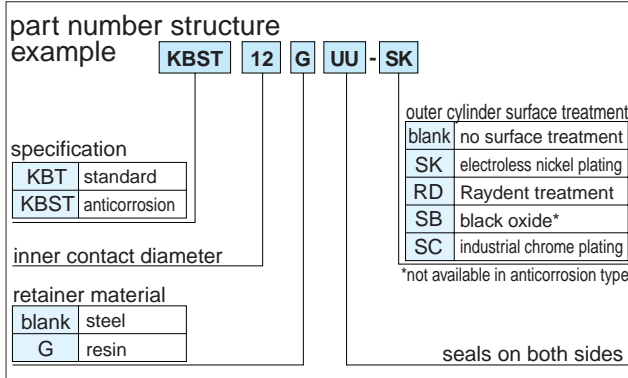

part number**				number of ball circuits	dr mm	tolerance μm	D		L ±0.3 mm
standard		anticorrosion					mm	tolerance μm	
steel retainer	resin retainer	stainless retainer	resin retainer						
KBT 5UU	KBT 5GUU	KBST 5UU	KBST 5GUU	4	5	+ 8 0	12	0	22
KBT 8UU	KBT 8GUU	KBST 8UU	KBST 8GUU	4	8		16	-13	25
KBT 12UU	KBT 12GUU	KBST 12UU	KBST 12GUU	4	12		22	0	32
KBT 16UU	KBT 16GUU	KBST 16UU	KBST 16GUU	4	16	+ 9 - 1	26	-16	36
KBT 20UU	KBT 20GUU	KBST 20UU	KBST 20GUU	5	20		32	0 -19	45
KBT 25UU	KBT 25GUU	KBST 25UU	KBST 25GUU	6	25	40	58		
KBT 30UU	KBT 30GUU	KBST 30UU	KBST 30GUU	6	30	- 1	47		68

** UU type is standard feature.

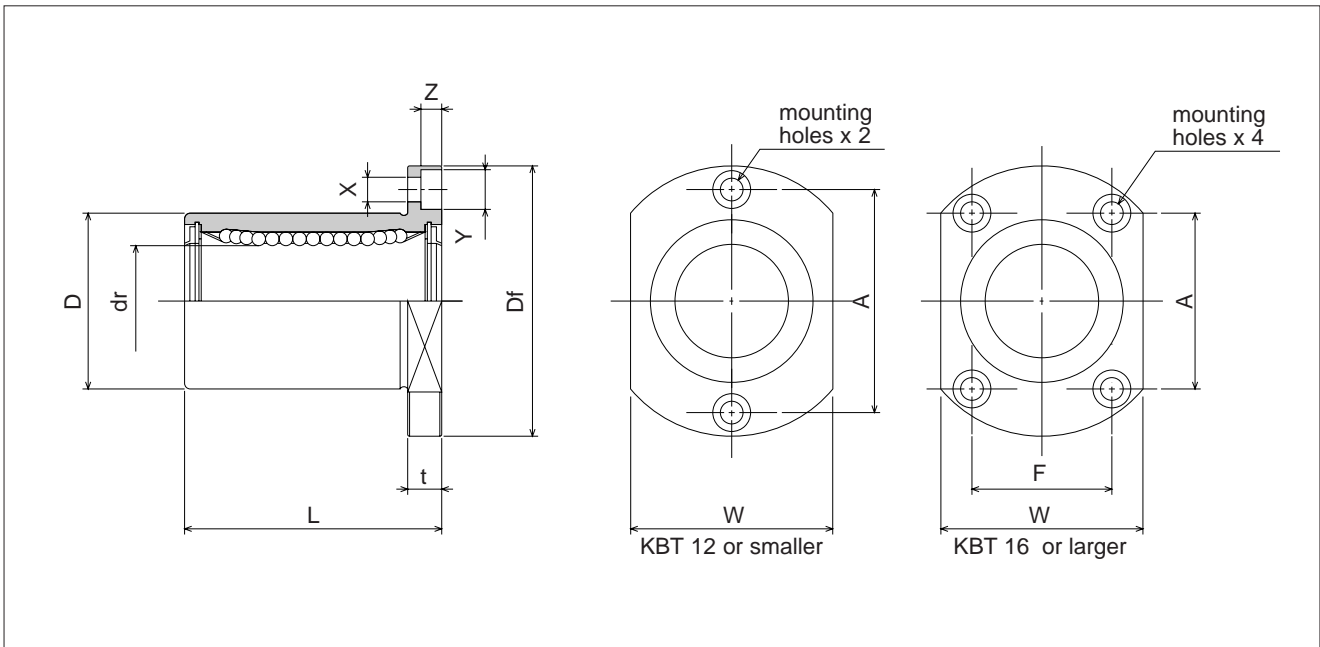



major dimensions						eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange								dynamic	static		
Df mm	W mm	t mm	A mm	F mm	X×Y×Z mm	μm	μm			C N	Co N
28	18	5	20	-	3.5×6×3.1	12	12	206	265	25	5
32	22	5	24	-	3.5×6×3.1			265	402	37	8
42	28	6	32	-	4.5×7.5×4.1			510	784	73	12
46	32	6	28	22	4.5×7.5×4.1			578	892	90	16
54	38	8	36	24	5.5×9×5.1	15	15	862	1,370	155	20
62	46	8	40	32	5.5×9×5.1			980	1,570	297	25
76	53	10	48	38	6.6×11×6.1			1,570	2,740	471	30

1N≒0.102kgf


KBF-W TYPE

— Round Flange Double-Wide Type —

This type is a metric dimension series generally used in Europe.

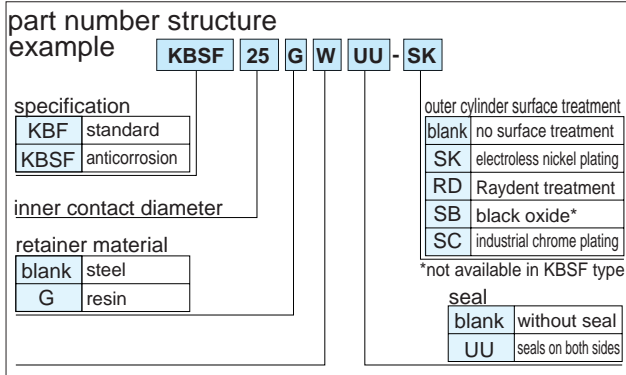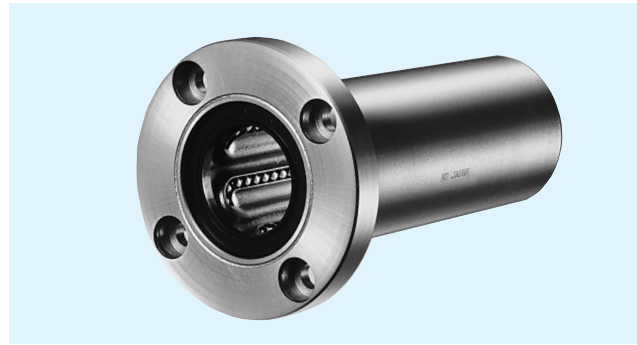

part number				dr		D		L
standard		anticorrosion		mm	tolerance	mm	tolerance	±0.3 mm
steel retainer	resin retainer	stainless retainer	resin retainer		μm		μm	
KBF 8W	KBF 8GW	KBSF 8W	KBSF 8GW	8	+ 9	16	0/-13	46
KBF12W	KBF12GW	KBSF12W	KBSF12GW	12	- 1	22	0	61
KBF16W	KBF16GW	KBSF16W	KBSF16GW	16	+11	26	-16	68
KBF20W	KBF20GW	KBSF20W	KBSF20GW	20	- 1	32	0	80
KBF25W	KBF25GW	KBSF25W	KBSF25GW	25	+13	40	-19	112
KBF30W	KBF30GW	KBSF30W	KBSF30GW	30	- 2	47	-19	123
KBF40W	KBF40GW	KBSF40W	KBSF40GW	40	+16	62	0	151
KBF50W	KBF50GW	KBSF50W	KBSF50GW	50	- 4	75	-22	192
KBF60W	KBF60GW	KBSF60W	KBSF60GW	60	- 4	90	0/-25	209

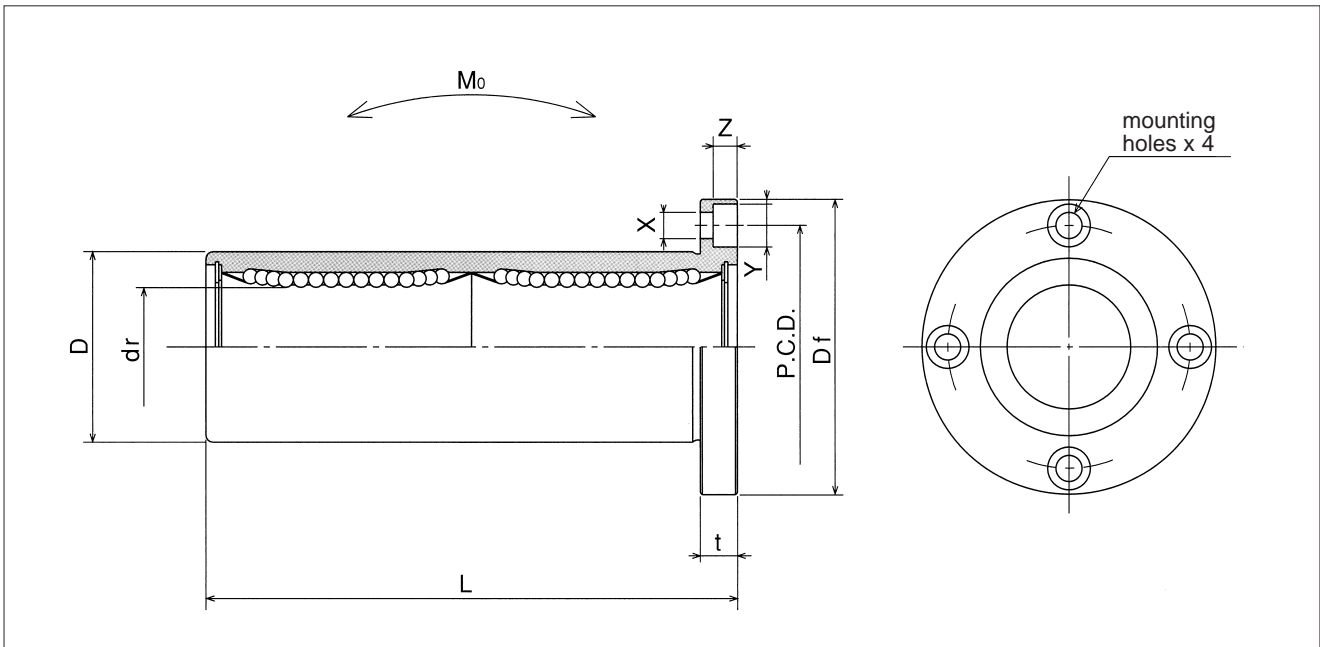


major dimensions				eccentricity	perpendicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						dynamic	static			
Df	t	P.C.D.	X×Y×Z	μm	μm	C	Co	Mo	g	mm
mm	mm	mm	mm			N	N	N·m		
32	5	24	3.5×6×3.1	15	15	421	804	4.3	59	8
42	6	32	4.5×7.5×4.1			813	1,570	11.7	110	12
46	6	36	4.5×7.5×4.1			921	1,780	14.2	160	16
54	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	260	20
62	8	51	5.5×9×5.1			1,570	3,140	44.0	540	25
76	10	62	6.6×11×6.1			2,500	5,490	78.9	815	30
98	13	80	9×14×8.1	20	20	3,430	8,040	147	1,805	40
112	13	94	9×14×8.1			6,080	15,900	396	2,820	50
134	18	112	11×17×11.1			7,550	20,000	487	4,920	60

1N≐0.102kgf 1N·m≐0.102kgf·m


KBK-W TYPE

— Square Flange Double-Wide Type —

This type is a metric dimension series generally used in Europe.

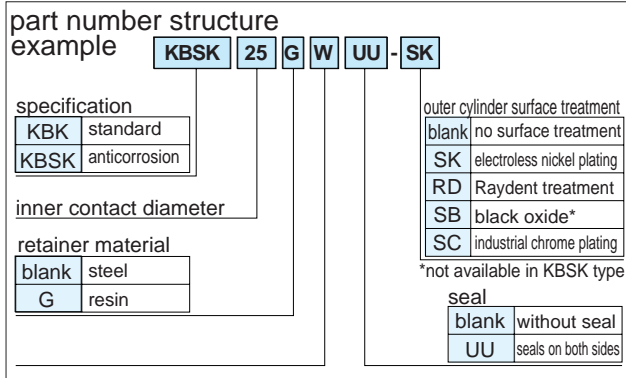

part number									
standard		anticorrosion		dr		D		L	Df
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	mm
KBK 8W	KBK 8GW	KBSK 8W	KBSK 8GW	8	+ 9	16	0/-13	46	32
KBK12W	KBK12GW	KBSK12W	KBSK12GW	12	- 1	22	0	61	42
KBK16W	KBK16GW	KBSK16W	KBSK16GW	16	+11	26	-16	68	46
KBK20W	KBK20GW	KBSK20W	KBSK20GW	20	- 1	32	0	80	54
KBK25W	KBK25GW	KBSK25W	KBSK25GW	25	+13	40	-19	112	62
KBK30W	KBK30GW	KBSK30W	KBSK30GW	30	- 2	47	0	123	76
KBK40W	KBK40GW	KBSK40W	KBSK40GW	40	+16	62	0	151	98
KBK50W	KBK50GW	KBSK50W	KBSK50GW	50	- 4	75	-22	192	112
KBK60W	KBK60GW	KBSK60W	KBSK60GW	60		90	0/-25	209	134

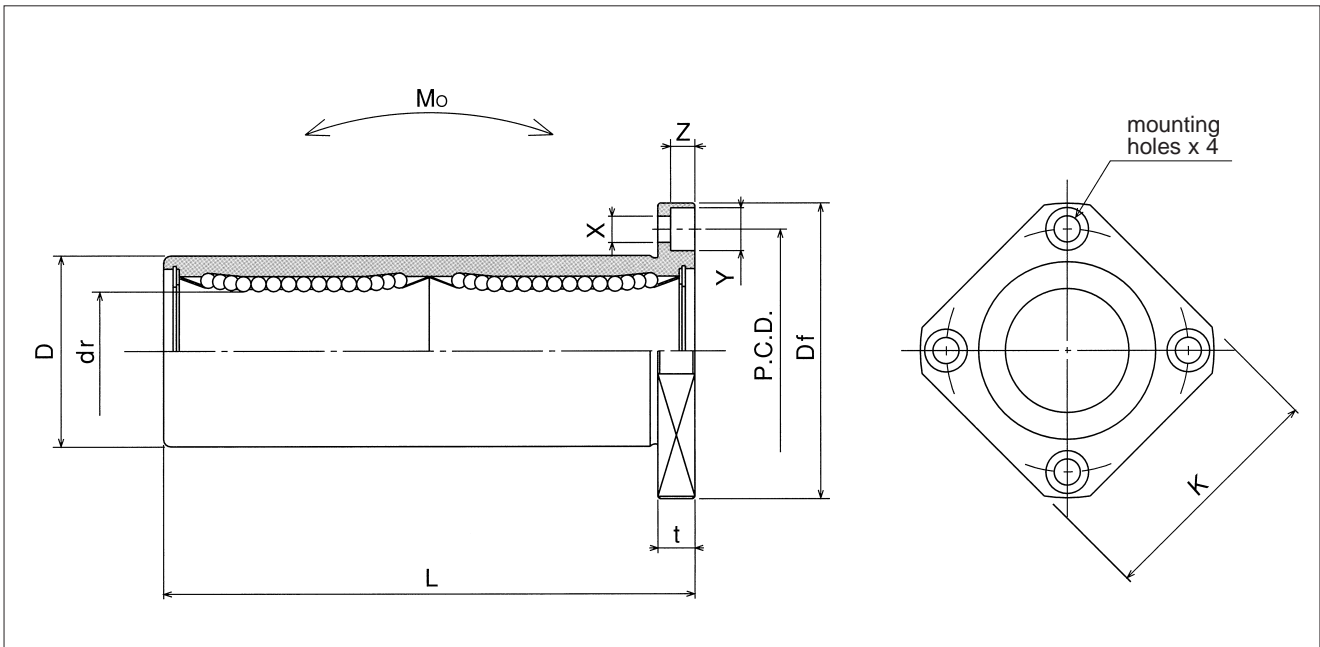

major dimensions				eccentricity	perpendicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						dynamic	static			
K	t	P.C.D.	X×Y×Z	μm	μm	C	Co	Mo	g	mm
mm	mm	mm	mm			N	N	N·m		
25	5	24	3.5×6×3.1	15	15	421	804	4.3	51	8
32	6	32	4.5×7.5×4.1			813	1,570	11.7	90	12
35	6	36	4.5×7.5×4.1			921	1,780	14.2	135	16
42	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	225	20
50	8	51	5.5×9×5.1			1,570	3,140	44.0	500	25
60	10	62	6.6×11×6.1			2,500	5,490	78.9	720	30
75	13	80	9×14×8.1	20	20	3,430	8,040	147	1,600	40
88	13	94	9×14×8.1			6,080	15,900	396	2,620	50
106	18	112	11×17×11.1			7,550	20,000	487	4,480	60

1N≐0.102kgf 1N·m≐0.102kgf·m

KBFC TYPE


– Center Mount Round Flange Type –

This type is a metric dimension series generally used in Europe.



part number structure		example		KBSFC	25	G	UU	-SK
specification		inner contact diameter		retainer material		outer cylinder surface treatment		
KBFC	standard			blank		blank no surface treatment		
KBSFC	anticorrosion			G		SK electroless nickel plating		
				steel		RD Raydent treatment		
				resin		SB black oxide*		
						SC industrial chrome plating		
						*not available in KBSFC type		
						seal		
						blank without seal		
						UU seals on both sides		

part number									
standard		anticorrosion		dr		D		L	
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	±0.3 mm	ℓ mm
KBFC 8	KBFC 8G	KBSFC 8	KBSFC 8G	8	+ 9	16	0/-13	46	20.5
KBFC12	KBFC12G	KBSFC12	KBSFC12G	12	- 1	22	0	61	27.5
KBFC16	KBFC16G	KBSFC16	KBSFC16G	16	+11	26	-16	68	31
KBFC20	KBFC20G	KBSFC20	KBSFC20G	20	- 1	32	0	80	36
KBFC25	KBFC25G	KBSFC25	KBSFC25G	25	+13	40	-19	112	52
KBFC30	KBFC30G	KBSFC30	KBSFC30G	30	- 2	47		123	56.5
KBFC40	KBFC40G	KBSFC40	KBSFC40G	40	+16	62	0	151	69
KBFC50	KBFC50G	KBSFC50	KBSFC50G	50	- 4	75	-22	192	89.5
KBFC60	KBFC60G	KBSFC60	KBSFC60G	60		90	0/-25	209	95.5

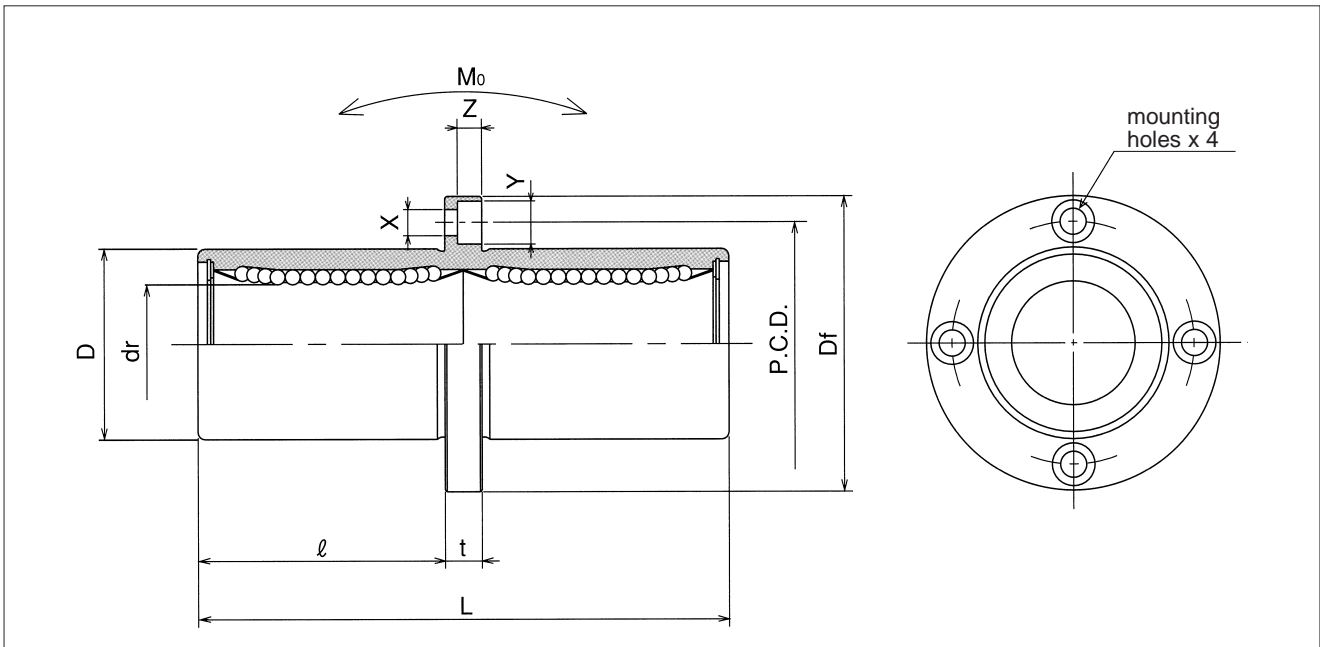


major dimensions				eccentricity	perpendicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						dynamic	static			
Df	t	P.C.D.	X×Y×Z	μm	μm	C	Co	Mo	g	mm
mm	mm	mm	mm			N	N	N·m		
32	5	24	3.5×6×3.1	15	15	421	804	4.3	59	8
42	6	32	4.5×7.5×4.1			813	1,570	11.7	110	12
46	6	36	4.5×7.5×4.1			921	1,780	14.2	160	16
54	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	260	20
62	8	51	5.5×9×5.1			1,570	3,140	44.0	540	25
76	10	62	6.6×11×6.1			2,500	5,490	78.9	815	30
98	13	80	9×14×8.1	20	20	3,430	8,040	147	1,805	40
112	13	94	9×14×8.1			6,080	15,900	396	2,820	50
134	18	112	11×17×11.1			7,550	20,000	487	4,920	60

1N≐0.102kgf 1N·m≐0.102kgf·m

KBKC TYPE


– Center Mount Square Flange Type –

This type is a metric dimension series generally used in Europe.

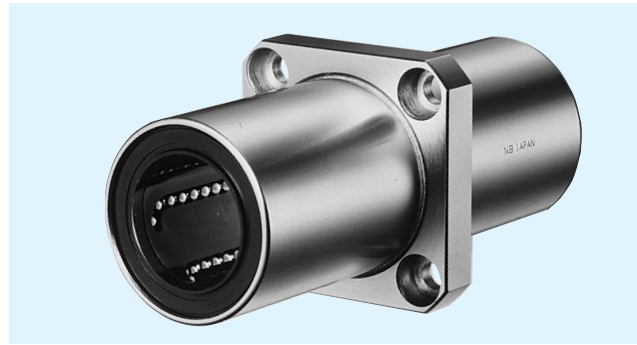

part number structure		example		KBSKC		25	G	UU	-SK	
specification		inner contact diameter		retainer material		outer cylinder surface treatment		seal		
KBKC	standard			blank	steel	blank	no surface treatment		blank	without seal
KBSKC	anticorrosion			G	resin	SK	electroless nickel plating		UU	seals on both sides
						RD	Raydent treatment			
						SB	black oxide*			
						SC	industrial chrome plating			
						*not available in KBSKC type				

part number									
standard		anticorrosion		dr		D		L	ℓ
steel retainer	resin retainer	stainless retainer	resin retainer	mm	tolerance μm	mm	tolerance μm	± 0.3 mm	mm
KBKC 8	KBKC 8G	KBSKC 8	KBSKC 8G	8	+ 9	16	0/-13	46	20.5
KBKC12	KBKC12G	KBSKC12	KBSKC12G	12	- 1	22	0	61	27.5
KBKC16	KBKC16G	KBSKC16	KBSKC16G	16	+11	26	-16	68	31
KBKC20	KBKC20G	KBSKC20	KBSKC20G	20	- 1	32	0	80	36
KBKC25	KBKC25G	KBSKC25	KBSKC25G	25	+13	40	-19	112	52
KBKC30	KBKC30G	KBSKC30	KBSKC30G	30	- 2	47		123	56.5
KBKC40	KBKC40G	KBSKC40	KBSKC40G	40	+16	62	0	151	69
KBKC50	KBKC50G	KBSKC50	KBSKC50G	50	- 4	75	-22	192	89.5
KBKC60	KBKC60G	KBSKC60	KBSKC60G	60		90	0/-25	209	95.5

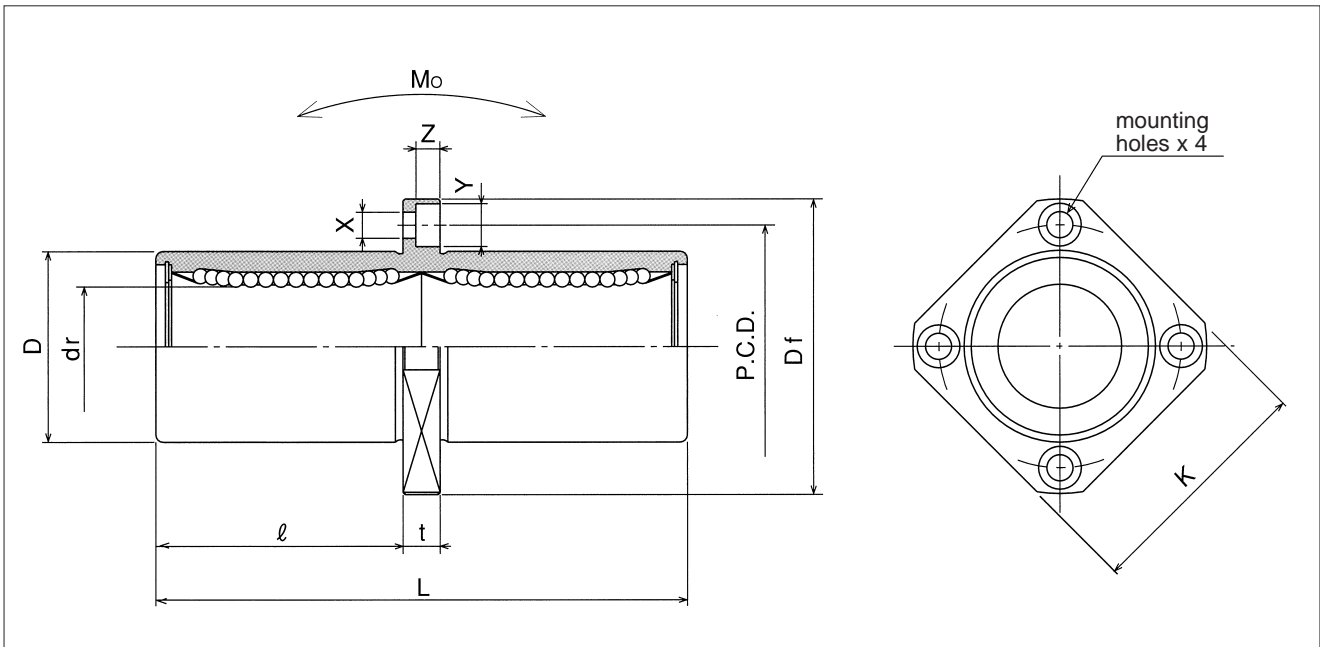



major dimensions					eccentricity	perpen- dicularity	basic load rating		allowable static moment Mo	mass	shaft diameter
flange							dynamic	static			
Df mm	K mm	t mm	P.C.D. mm	X×Y×Z mm	μm	μm			C N	Co N	N·m
32	25	5	24	3.5×6×3.1	15	15	421	804	4.3	51	8
42	32	6	32	4.5×7.5×4.1			813	1,570	11.7	90	12
46	35	6	36	4.5×7.5×4.1			921	1,780	14.2	135	16
54	42	8	43	5.5×9×5.1	17	17	1,370	2,740	25.0	225	20
62	50	8	51	5.5×9×5.1			1,570	3,140	44.0	500	25
76	60	10	62	6.6×11×6.1			2,500	5,490	78.9	720	30
98	75	13	80	9×14×8.1	20	20	3,430	8,040	147	1,600	40
112	88	13	94	9×14×8.1			6,080	15,900	396	2,620	50
134	106	18	112	11×17×11.1			7,550	20,000	487	4,480	60

1N≐0.102kgf 1N·m≐0.102kgf·m

SW TYPE


– Standard Type –

This type is an inch dimension series mainly used in the U.S.

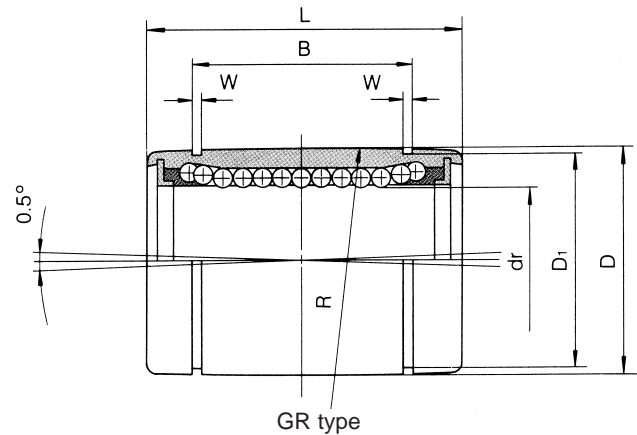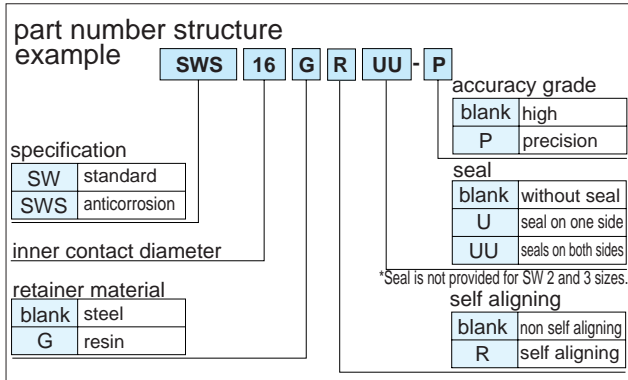

part number				number of ball circuits	dr				D	
standard		anticorrosion			inch mm	tolerance inch/ μ m		inch mm	tolerance inch/ μ m	
steel retainer	resin retainer	stainless retainer	resin retainer			precision	high			
–	–	–	SWS 2	SWS 2G	4	.1250 3.175	0 –.00035	.3125 7.938	0 –.00040	
–	–	–	SWS 3	SWS 3G	4	.1875 4.763	0 – 8	.3750 9.525	0 – 9	
SW 4	SW 4G	SW 4GR	SWS 4	SWS 4G	4	.2500 6.350	0 –.00025	.5000 12.700	0 –.00045 –11	
SW 6	SW 6G	SW 6GR	SWS 6	SWS 6G	4	.3750 9.525	0 –.00025	.6250 15.875	0 –.00050	
SW 8	SW 8G	SW 8GR	SWS 8	SWS 8G	4	.5000 12.700	0 – 6	.8750 22.225	0 – 9	
SW10	SW10G	SW10GR	SWS10	SWS10G	4	.625 15.875	0 – 6	1.1250 28.575	–13	
SW12	SW12G	SW12GR	SWS12	SWS12G	5	.7500 19.050	0 –.00030	1.2500 31.750	0 –.00065	
SW16	SW16G	SW16GR	SWS16	SWS16G	6	1.0000 25.400	0 – 7	1.5625 39.688	0 –16	
SW20	SW20G	SW20GR	SWS20	SWS20G	6	1.2500 31.750	0 –.00035	2.0000 50.800	0 –.00075	
SW24	SW24G	SW24GR	SWS24	SWS24G	6	1.5000 38.100	0 – 8	2.3750 60.325	0 –19	
SW32	SW32G	SW32GR	SWS32	SWS32G	6	2.0000 50.800	0 – 8	3.0000 76.200	0	
SW40	–	–	–	–	6	2.5000 63.500	0 –.00040	3.7500 95.250	–.00090 0	
SW48	–	–	–	–	6	3.0000 76.200	0 – 9	4.50000 114.300	–22	
SW64	–	–	–	–	6	4.0000 101.600	–.00040 –10	6.0000 152.400	–.00100 –25	

SLIDE BUSH

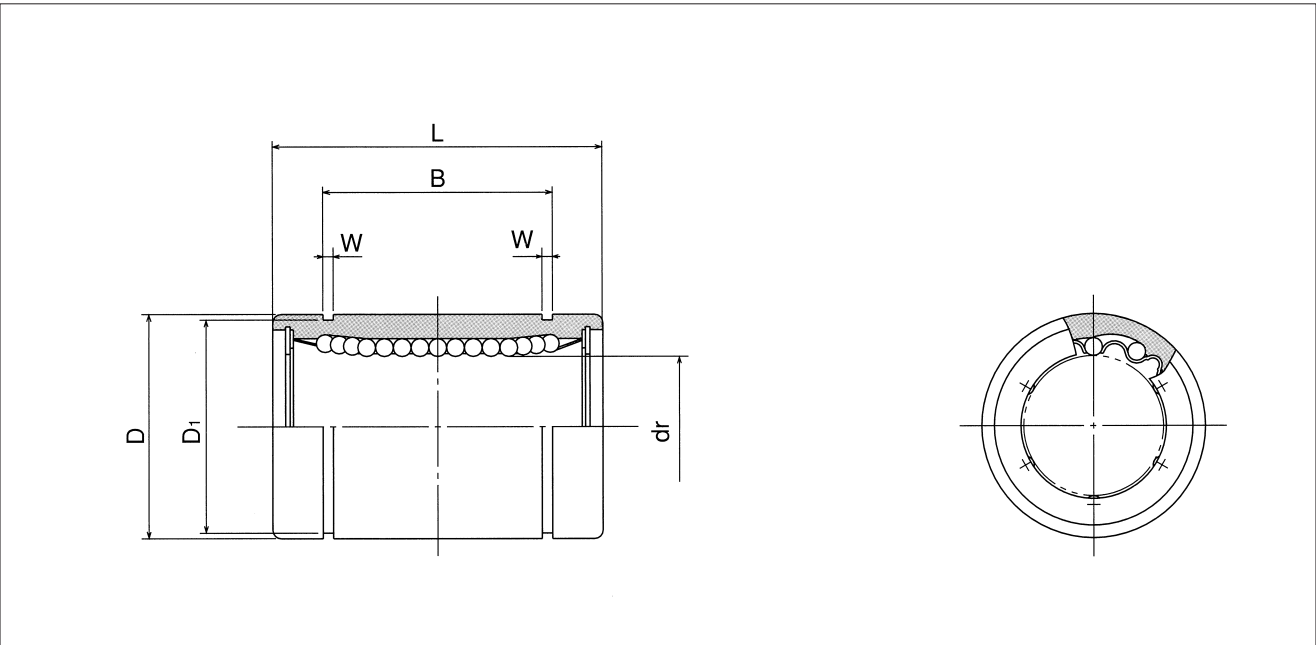



major dimensions						eccentricity		radial clearance (maximum) inch/ μ m	basic load rating		mass g	shaft diameter inch mm
inch mm	L tolerance inch/mm	inch mm	B tolerance inch/mm	inch mm	D ₁ inch mm	precision inch/ μ m	high inch/ μ m		dynamic C N	static Co N		
.5000 12.700	0 - .008	.3681 9.35	0 - .008	.0280 0.710	.2902 7.370	-	.0003 8	- .0001 - 2	59	76	2.8	1/8 3.175
.5625 14.275		.4311 10.95		.0280 0.710	.3520 8.940				91	110	3.6	3/16 4.763
.7500 19.050		.5110 12.98		.0390 0.992	.4687 11.906				206	265	9.5	1/4 6.350
.8750 22.225		.6358 16.15		.0390 0.992	.5880 14.935				225	314	15	3/8 9.525
1.2500 31.750		.9625 24.46		.0459 1.168	.8209 20.853				510	784	42	1/2 12.700
1.5000 38.100		1.1039 28.04		.0559 1.422	1.0590 26.899				774	1,180	85	5/8 15.875
1.6250 41.275		1.1657 29.61		.0559 1.422	1.1760 29.870				862	1,370	104	3/4 19.050
2.2500 57.150	0 - .012	1.7547 44.57	0 - .012	.0679 1.727	1.4687 37.306	10	15	- 6	980	1,570	220	1 25.400
2.6250 66.675		2.0047 50.92		.0679 1.727	1.8859 47.904				1,570	2,740	465	1-1/4 31.750
3.0000 76.200		2.4118 61.26		0.859 2.184	2.2389 56.870				2,180	4,020	720	1-1/2 38.100
4.0000 101.600	0 - 0.3	3.1917 81.07	0 - 0.3	.1029 2.616	2.8379 72.085	.0007	.0010 25	- .0005 - 13	3,820	7,940	1,310	2 50.800
5.0000 127.000		3.9760 100.99		.1200 3.048	3.5519 90.220				4,700	10,000	2,600	2-1/2 63.500
6.0000 152.400	0 - .016	4.726 120.04	0 - .016	.1200 3.048	4.3100 109.474	.0008	.0012 30	- 20	7,350	16,000	4,380	3 76.200
8.0000 203.200	0 - 0.4	6.258 158.95	0 - 0.4	.1389 3.530	5.745 145.923				14,100	34,800	10,200	4 101.600

1N \approx 0.225lbs 1kg \approx 2.205lbs

SW-AJ TYPE


– Clearance Adjustable Type –

This type is an inch dimension series mainly used in the U.S.

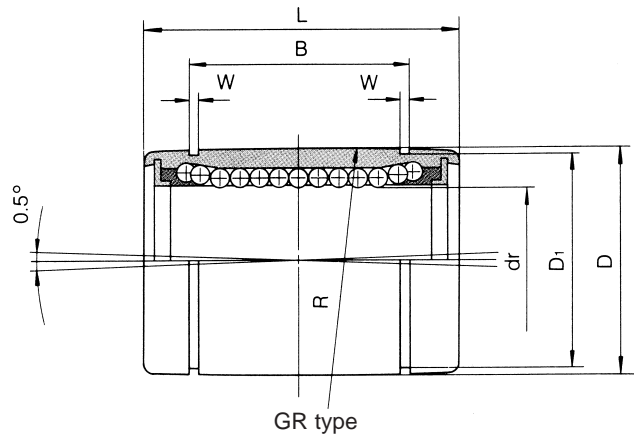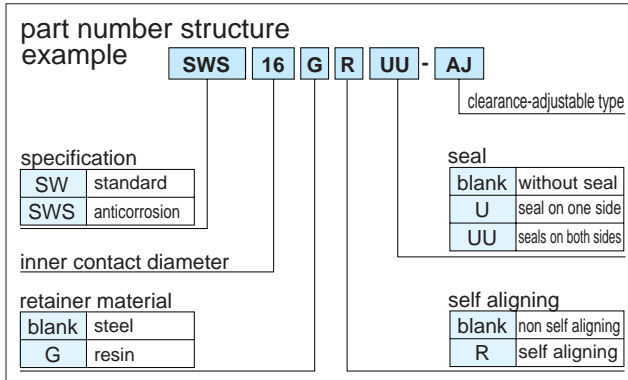

part number					number of ball circuits	dr			
standard		anticorrosion		inch		tolerance*	D		
steel retainer	resin retainer	stainless retainer	resin retainer				inch	tolerance*	
—	SW 4G-AJ	—	—	SWS 4G-AJ	4	.2500 6.350	—	.5000 12.700	$^{0}_{-11}$ $^{-0.00045}_{0}$
—	SW 6G-AJ	—	—	SWS 6G-AJ	4	.3750 9.525		$^{0}_{-9}$.6250 15.875
SW 8-AJ	SW 8G-AJ	SW 8GR-AJ	SWS 8-AJ	SWS 8G-AJ	4	5.000 12.700	$^{0}_{-9}$.8750 22.225	$^{-0.00050}_{0}$
SW10-AJ	SW10G-AJ	SW10GR-AJ	SWS10-AJ	SWS10G-AJ	4	.625 15.875	—	1.1250 28.575	$^{-13}_{0}$
SW12-AJ	SW12G-AJ	SW12GR-AJ	SWS12-AJ	SWS12G-AJ	5	.7500 19.050		$^{0}_{-10}$	1.2500 31.750
SW16-AJ	SW16G-AJ	SW16GR-AJ	SWS16-AJ	SWS16G-AJ	6	1.0000 25.400	$^{0}_{-10}$	1.5625 39.688	$^{0}_{-16}$
SW20-AJ	SW20G-AJ	SW20GR-AJ	SWS20-AJ	SWS20G-AJ	6	1.2500 31.750	$^{0}_{-10}$	2.0000 50.800	$^{0}_{-19}$
SW24-AJ	SW24G-AJ	SW24GR-AJ	SWS24-AJ	SWS24G-AJ	6	1.5000 38.100	$^{0}_{-12}$	2.3750 60.325	$^{0}_{-19}$
SW32-AJ	SW32G-AJ	SW32GR-AJ	SWS32-AJ	SWS32G-AJ	6	2.0000 50.800	$^{0}_{-12}$	3.0000 76.200	$^{0}_{-19}$
SW40-AJ	—	—	—	—	6	2.5000 63.500	$^{0}_{-15}$	3.7500 95.250	$^{-0.00090}_{0}$
SW48-AJ	—	—	—	—	6	3.0000 76.200	$^{0}_{-15}$	4.5000 114.300	$^{-22}_{0}$
SW64-AJ	—	—	—	—	6	4.0000 101.600	$^{0}_{-20}$	6.0000 152.400	$^{0}_{-25}$

* Accuracy is measured prior to machining clearance slot.

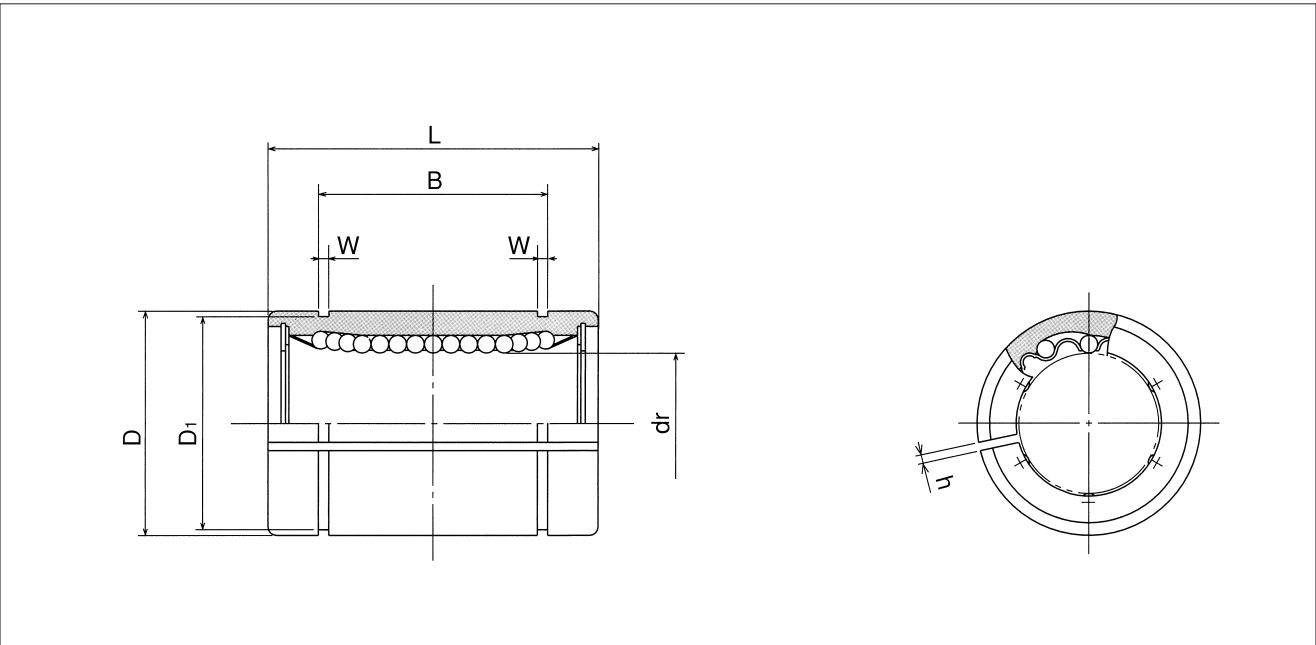




major dimensions							eccentricity	Radial clearance (Max)	basic load rating		mass	shaft diameter
inch	L tolerance	inch	B tolerance	W	D ₁	h			dynamic C	static Co		
mm	inch/mm	mm	inch/mm	mm	mm	mm	μm	inch/μm	N	N		mm
.7500 19.050	0	.5100 12.98	0	.0390 0.992	.4687 11.906	.04 1	.0005	-.0001	206	265	7.5	1/4 6.350
.8750 22.225		.6358 12.15		.0390 0.992	.5880 14.935	.04 1	12	-3	225	314	13.5	3/8 9.525
1.2500 31.750	-0.008	.9625 24.46	-0.008	.0459 1.168	.8209 20.853	.06 1.5	.0005	-.0001	510	784	41	1/2 12.700
1.5000 38.100		1.1039 28.04		.0559 1.422	1.0590 26.899	.06 1.5	12	-4	774	1,180	83	5/8 15.875
1.6250 41.275	-0.2	1.1657 29.61	-0.2	.0559 1.422	1.1760 29.870	.06 1.5	.0006	-.0002	862	1,370	102	3/4 19.050
2.2500 57.150		1.7547 44.57		.0679 1.727	1.4687 37.306	.06 1.5	15	-6	980	1,570	218	1 25.400
2.6250 66.675	0	2.0047 50.92	0	.0679 1.727	1.8859 47.904	.10 2.5	.0008	-.0003	1,570	2,740	455	1-1/4 31.750
3.0000 76.200		2.4118 61.26		0.859 2.184	2.2389 56.870	.12 3	20	-8	2,180	4,020	710	1-1/2 38.100
4.0000 101.600	-0.3	3.1917 81.07	-0.3	.1029 2.616	2.8379 72.085	.12 3	.0010	-.0005	3,820	7,940	1,290	2 50.800
5.0000 127.000		3.9760 100.99		.1200 3.048	3.5519 90.220	.12 3		25	-13	4,700	10,000	2,560
6.0000 152.400	0	4.726 120.04	0	.1200 3.048	4.3100 109.474	.12 3	.0012	-.0008	7,350	16,000	4,350	3 76.200
8.0000 203.200		6.258 158.95		.1389 3.530	5.745 145.923	.12 3		30	-20	14,100	34,800	10,150

1N ≅ 0.225lbs 1kg ≅ 2.205lbs

SW-OP TYPE


— Open Type —

This type is an inch dimension series mainly used in the U.S.

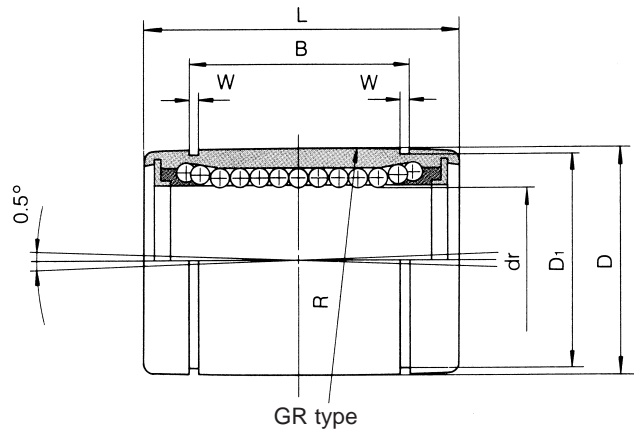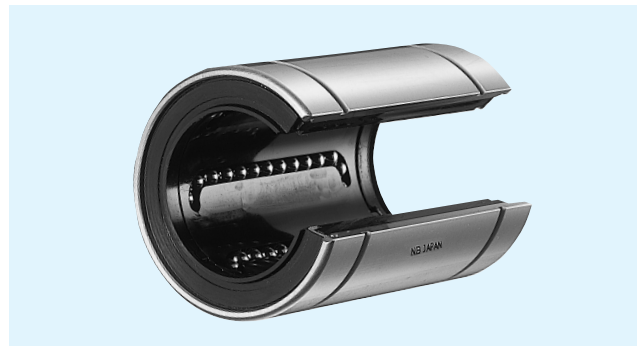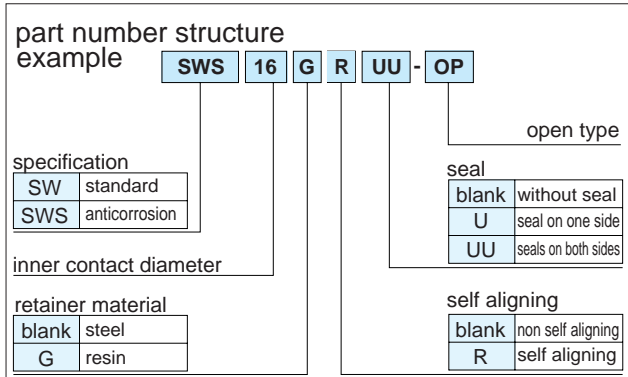

part number					number of ball circuits	dr		D	
standard		anticorrosion		inch		tolerance	inch	tolerance	
steel retainer	resin retainer	stainless retainer	resin retainer	mm		inch/ μ m	mm	inch/ μ m	
SW 8-OP	SW 8G-OP	SW 8GR-OP	SWS 8-OP	SWS 8G-OP	3	.5000 12.700	0 -.00040	.8750 22.225	0 -.00050
SW10-OP	SW10G-OP	SW10GR-OP	SWS10-OP	SWS10G-OP	3	.625 15.875	0 - 9	1.1250 28.575	0 - 13
SW12-OP	SW12G-OP	SW12GR-OP	SWS12-OP	SWS12G-OP	4	.7500 19.050	0 -.00040	1.2500 31.750	0 -.00065
SW16-OP	SW16G-OP	SW16GR-OP	SWS16-OP	SWS16G-OP	5	1.0000 25.400	0 -10	1.5625 39.688	0 - 16
SW20-OP	SW20G-OP	SW20GR-OP	SWS20-OP	SWS20G-OP	5	1.2500 31.750	0 -.00050	2.0000 50.800	0 -.00075
SW24-OP	SW24G-OP	SW24GR-OP	SWS24-OP	SWS24G-OP	5	1.5000 38.100	0 -12	2.3750 60.325	0 - 19
SW32-OP	SW32G-OP	SW32GR-OP	SWS32-OP	SWS32G-OP	5	2.0000 50.800	0 -15	3.0000 76.200	0 - 22
SW40-OP	-	-	-	-	5	2.5000 63.500	0 -.00060	3.7500 95.250	0 - 25
SW48-OP	-	-	-	-	5	3.0000 76.200	0 -15	4.50000 114.300	0 - 25
SW64-OP	-	-	-	-	5	4.0000 101.600	0 -.00080 -20	6.0000 152.400	0 -.00100 -25

* Accuracy is measured prior to machining open slot.

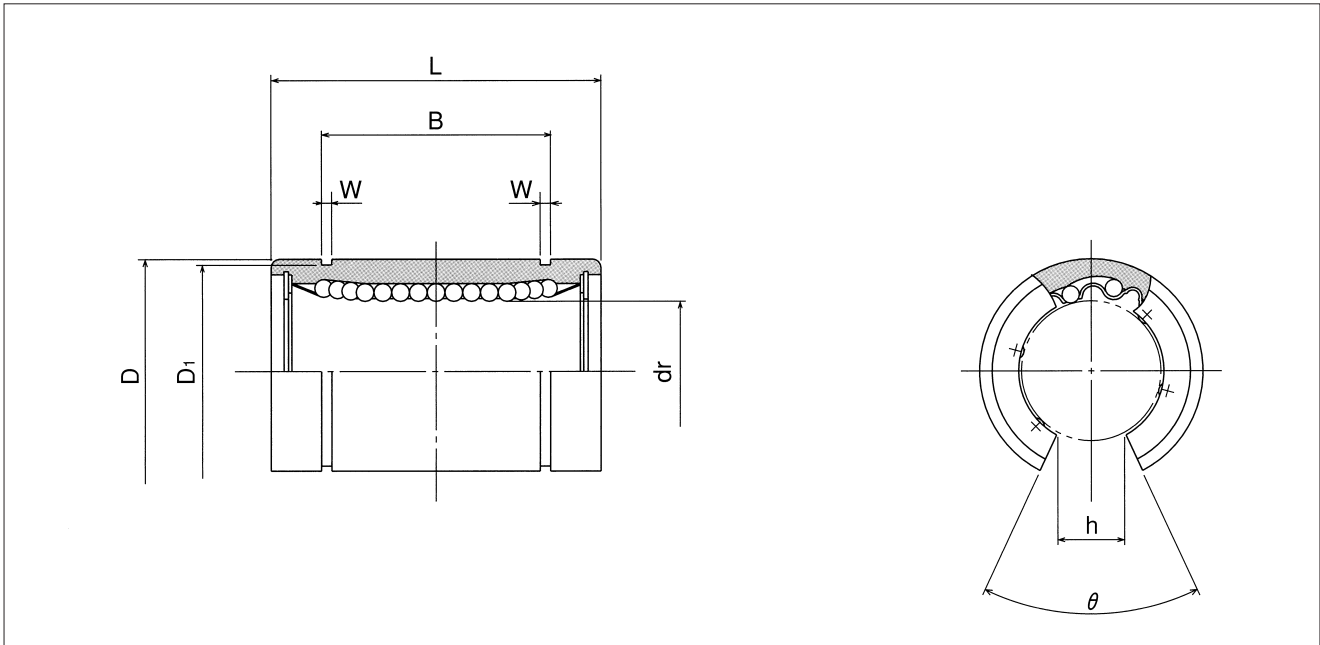


major dimensions								eccentricity* inch μm	Radial clearance (Max) inch/μm	basic load rating		mass g	shaft diameter inch mm
L		B		W	D ₁	h	θ			dynamic C N	static C ₀ N		
inch	tolerance inch/mm	inch	tolerance inch/mm	inch	inch	inch	°						
1.2500 31.750	0	.9625 24.46	0	.0459 1.168	.8209 20.853	.34 7.9375	80°	.0005 12	-.0001 -4	510	784	32	1/2 12.700
1.5000 38.100	-.008	1.1039 28.04	-.008	.0559 1.422	1.0590 26.899	.375 9.5250	80°			774	1,180	64	5/8 15.875
1.6250 41.275	0	1.1657 29.61	0	.0559 1.422	1.1760 29.870	.4375 11.1125	60°	.0006 15	-.0002 -6	862	1,370	86	3/4 19.050
2.2500 57.150	-.012	1.7547 44.57	-.012	.0679 1.727	1.4687 37.306	.5625 14.2875	50°			980	1,570	190	1 25.400
2.6250 66.675	0	2.0047 50.92	0	.0679 1.727	1.8859 47.904	.625 15.875	50°	.0008 20	-.0003 -8	1,570	2,740	390	1-1/4 31.750
3.0000 76.200	0	2.4118 61.26	0	0.859 2.184	2.2389 56.870	.75 19.05	50°			2,180	4,020	610	1-1/2 38.100
4.0000 101.600	-.03	3.1917 81.07	-.03	.1029 2.616	2.8379 72.085	1.0 25.40	50°			3,820	7,940	1,120	2 50.800
5.0000 127.000	0	3.9760 100.99	0	.1200 3.048	3.5519 90.220	1.25 31.75	50°	.0010 25	-.0005 -13	4,700	10,000	2,230	2-1/2 63.500
6.0000 152.400	-.016	4.726 120.04	-.016	.1200 3.048	4.3100 109.474	1.5 38.10	50°			7,350	16,000	3,750	3 76.200
8.0000 203.200	0 -.04	6.258 158.95	0 -.04	.1389 3.530	5.745 145.923	2.0 50.8	50°	.0012 30	-.0008 -20	14,100	34,800	8,740	4 101.60

1N ≅ 0.225lbs 1kg ≅ 2.205lbs


SW-W TYPE

— Double-Wide Type —

This type is an inch dimension series mainly used in the U.S.

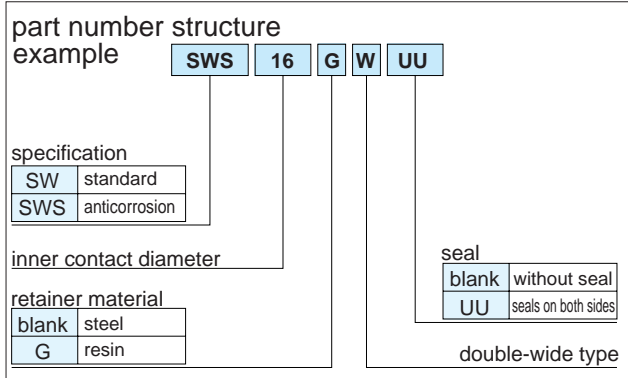

part number				number of ball circuits	dr			
standard		anticorrosion			inch mm	tolerance inch/ μ m	D	
steel retainer	resin retainer	stainless retainer	resin retainer				inch mm	tolerance inch/ μ m
SW 4W	SW 4GW	SWS 4W	SWS 4GW	4	.2500 6.350	- .00040 0 -10	.5000 12.700	- .00050 0 -13
SW 6W	SW 6GW	SWS 6W	SWS 6GW	4	.3750 9.525		.6250 15.875	- .00065 0 -16
SW 8W	SW 8GW	SWS 8W	SWS 8GW	4	.5000 12.700		.8750 22.225	
SW10W	SW10GW	SWS10W	SWS10GW	4	.6250 15.875		1.1250 28.575	
SW12W	SW12GW	SWS12W	SWS12GW	5	.7500 19.050	- .00050 0	1.2500 31.750	- .00075 0
SW16W	SW16GW	SWS16W	SWS16GW	6	1.0000 25.400	-12 0	1.5625 39.688	-19 0
SW20W	SW20GW	SWS20W	SWS20GW	6	1.2500 31.750	- .00060 0 -15	2.0000 50.800	- .00090 0
SW24W	SW24GW	SWS24W	SWS24GW	6	1.5000 38.100		2.3750 60.325	-22 0
SW32W	SW32GW	SWS32W	SWS32GW	6	2.0000 50.800		3.0000 76.200	- .00100 0 -25

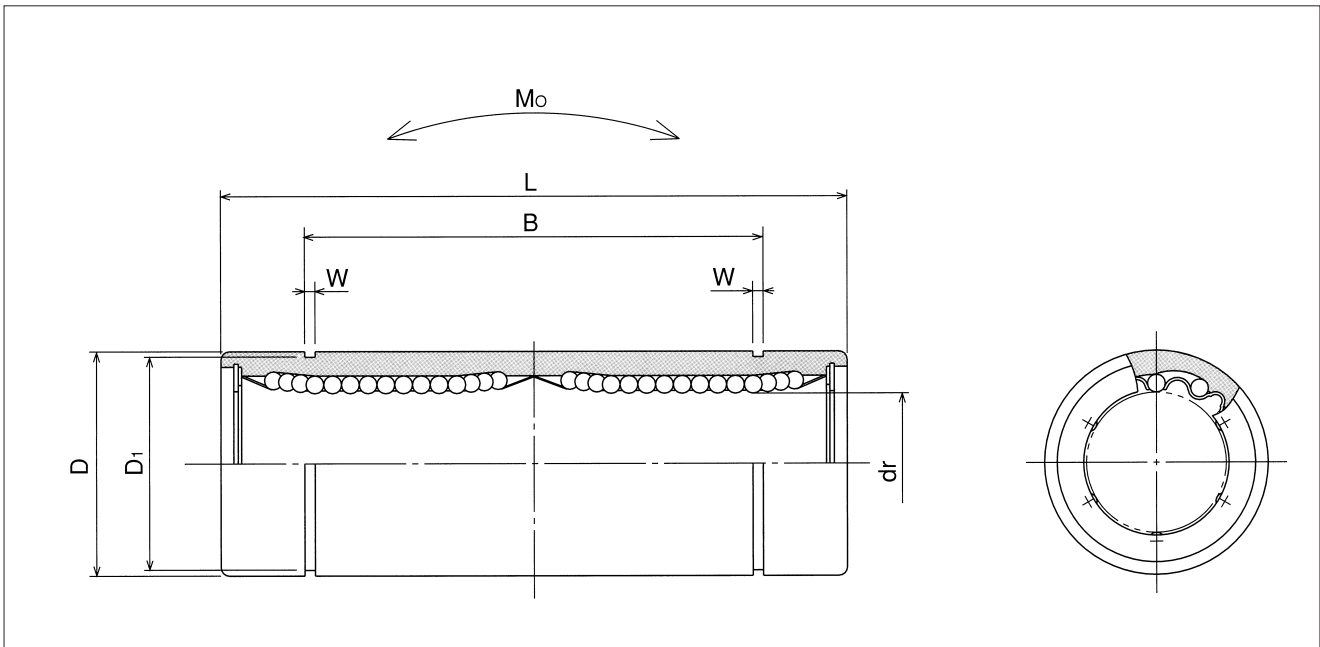


major dimensions						eccentricity	basic load rating		allowable static moment	mass	shaft diameter			
inch	L	B		W	D ₁		dynamic	static						
mm	tolerance	inch	tolerance	inch	inch	C	C ₀	M ₀	g	inch				
mm	inch/mm	mm	inch/mm	mm	mm	N	N	N · m		mm				
1.3750 34.925	0 - .012	1.0220 25.959	0 - .012	.0390 0.992	.4687 11.906	.0006	323	530	2.0	17.5	1/4 6.350			
1.5938 40.481		1.2716 32.298		.0390 0.992	.5880 14.935		353	630				2.7	28	3/8 9.525
2.3750 60.325		1.9250 48.895		.0459 1.168	.8209 20.853		813	1,570				11.5	80	1/2 12.700
2.8125 71.438	0 -0.3	2.2079 56.080	0 -0.3	.0559 1.422	1.0590 26.899	.0008	1,230	2,350	20.0	160	5/8 15.875			
3.0937 78.581	2.3314 59.218	.0559 1.422	1.1760 29.870	1,370	2,740		26.5	195				3/4 19.050		
4.2813 108.744	0 - .016	3.5094 89.139	0 - .016	.0679 1.727	1.4687 37.306	.0010	1,570	3,140	41.2	410	1 25.400			
5.0000 127.000		4.0094 101.839		.0679 1.727	1.8859 47.904		2,500	5,490				84.8	820	1-1/4 31.750
5.6875 144.463		4.8236 122.519		.0859 2.184	2.2389 56.870		3,430	8,040				143	1,250	1-1/2 38.100
7.7500 196.850	0 -0.4	6.3834 162.138	0 -0.4	.1029 2.616	2.8379 72.085	.0012 30	6,080	15,900	399	2,350	2 50.800			

1N ≅ 0.225lbs 1N·m ≅ 0.738lb·ft

SWF TYPE


— Round Flange Type —

This type is an inch dimension series mainly used in the U.S.

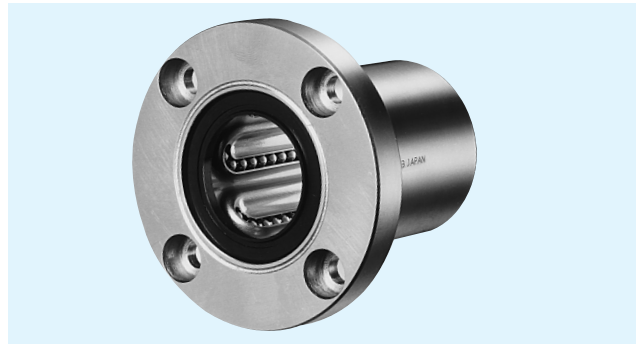

part number structure											
example	SWSF 16 G UU - SK										
specification	<table border="1"> <tr> <td>SWF</td> <td>standard</td> </tr> <tr> <td>SWSF</td> <td>anticorrosion</td> </tr> </table>	SWF	standard	SWSF	anticorrosion						
SWF	standard										
SWSF	anticorrosion										
inner contact diameter											
retainer material	<table border="1"> <tr> <td>blank</td> <td>steel</td> </tr> <tr> <td>G</td> <td>resin</td> </tr> </table>	blank	steel	G	resin						
blank	steel										
G	resin										
outer cylinder surface treatment	<table border="1"> <tr> <td>blank</td> <td>no surface treatment</td> </tr> <tr> <td>SK</td> <td>electroless nickel plating</td> </tr> <tr> <td>RD</td> <td>Raydent treatment</td> </tr> <tr> <td>SB</td> <td>black oxide*</td> </tr> <tr> <td>SC</td> <td>industrial chrome plating</td> </tr> </table>	blank	no surface treatment	SK	electroless nickel plating	RD	Raydent treatment	SB	black oxide*	SC	industrial chrome plating
blank	no surface treatment										
SK	electroless nickel plating										
RD	Raydent treatment										
SB	black oxide*										
SC	industrial chrome plating										
*not available in SWSF type seal											
seal	<table border="1"> <tr> <td>blank</td> <td>without seal</td> </tr> <tr> <td>UU</td> <td>seals on both sides</td> </tr> </table>	blank	without seal	UU	seals on both sides						
blank	without seal										
UU	seals on both sides										

part number								
standard		anticorrosion		dr		D		L
steel retainer	resin retainer	stainless retainer	resin retainer	inch mm	tolerance inch/ μ m	inch mm	tolerance inch/ μ m	± 0.12 ± 0.3 inch mm
SWF 4	SWF 4G	SWSF 4	SWSF 4G	.2500 6.350	0 - .00040	.5000 12.700	$^{0}_{-0.00050}$ $^{0}_{-13}$.7500 19.050
SWF 6	SWF 6G	SWSF 6	SWSF 6G	.3750 9.525		.6250 15.875	$^{0}_{-0.00065}$.8750 22.225
SWF 8	SWF 8G	SWSF 8	SWSF 8G	.5000 12.700	0 - 9	.8750 22.225	$^{0}_{-0.00065}$ $^{0}_{-16}$	1.2500 31.750
SWF10	SWF10G	SWSF10	SWSF10G	.6250 15.875		1.1250 28.575		1.5000 38.100
SWF12	SWF12G	SWSF12	SWSF12G	.7500 19.050	0 - .00040	1.2500 31.750	$^{0}_{-0.00075}$	1.6250 41.275
SWF16	SWF16G	SWSF16	SWSF16G	1.0000 25.400	0 - 10	1.5625 39.688	$^{0}_{-0.00075}$ $^{0}_{-19}$	2.2500 57.150
SWF20	SWF20G	SWSF20	SWSF20G	1.2500 31.750	0 - .00050	2.0000 50.800	$^{0}_{-0.00090}$	2.6250 66.675
SWF24	SWF24G	SWSF24	SWSF24G	1.5000 38.100		2.3750 60.325	$^{0}_{-0.00115}$ $^{0}_{-22}$	3.0000 76.200
SWF32	SWF32G	SWSF32	SWSF32G	2.0000 50.800	0 - 12	3.0000 76.200	$^{0}_{-0.00115}$ $^{0}_{-25}$	4.0000 101.600
SWF40	—	—	—	2.5000 63.500	0 - .00060	3.7500 95.250	$^{0}_{-0.00115}$ $^{0}_{-25}$	5.0000 127.000
SWF48	—	—	—	3.0000 76.200	0 - 15	4.5000 114.300		6.0000 152.400
SWF64	—	—	—	4.0000 101.600	$^{0}_{-0.00080}$ $^{0}_{-20}$	6.0000 152.400	$^{0}_{-0.00115}$ $^{0}_{-29}$	8.0000 203.200

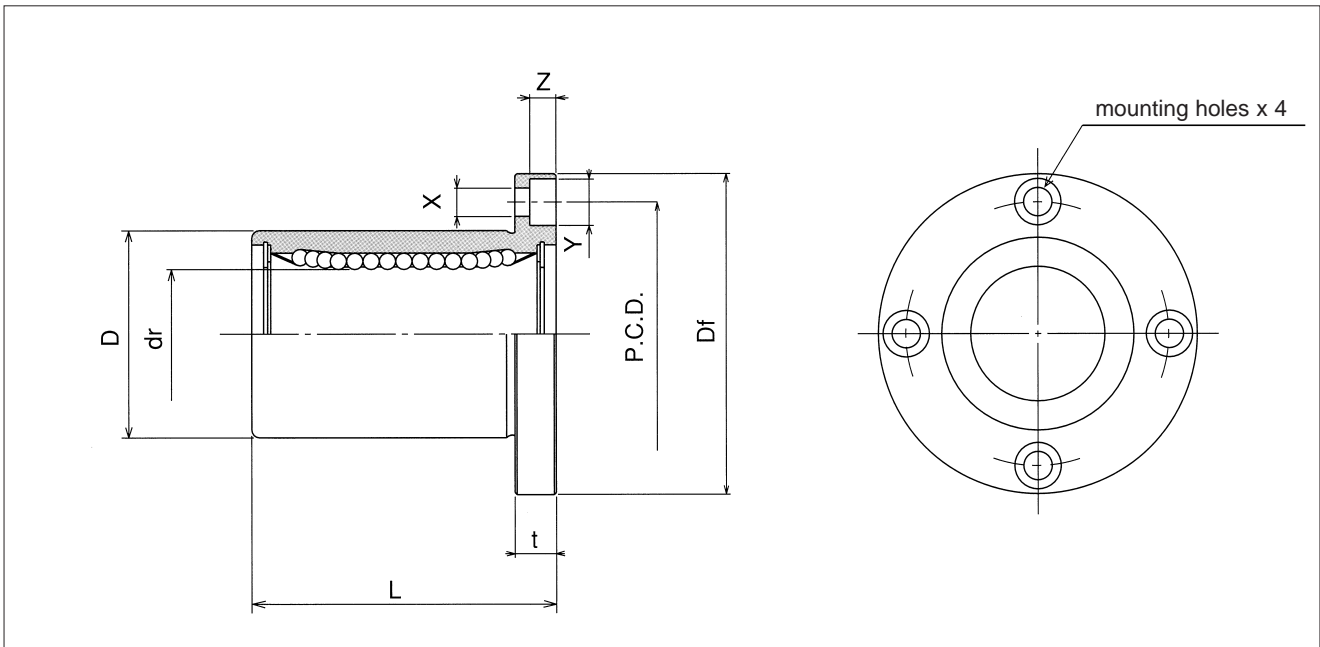


major dimensions				eccentricity	perpendicularity	basic load rating		mass	shaft diameter		
flange						inch	μm			dynamic	static
Df	t	P.C.D.	X×Y×Z	inch	μm	C	Co	g	inch	mm	
1.2500 31.750	0.219 5.556	.8750 22.225	.1560 × .2500 × .1410 3.969 × 6.350 × 3.572	.0005	12	.0005	12	206	265	32	1/4 6.350
1.5000 38.100	.2500 6.350	1.0620 26.988	.1875 × .2970 × .1720 4.763 × 7.541 × 4.366					225	314	47	3/8 9.525
1.7500 44.450	.2500 6.350	1.312 33.338	.1875 × .2970 × .1720 4.763 × 7.541 × 4.366					510	784	88	1/2 12.700
2.0000 50.800	.2500 6.350	1.5620 39.688	.1875 × .2970 × .1720 4.763 × 7.541 × 4.366					774	1,180	140	5/8 15.875
2.1875 55.563	.3125 7.938	1.7180 43.660	.2187 × .3440 × .2030 5.556 × 8.731 × 5.159	.0006	15	.0006	15	862	1,370	190	3/4 19.050
2.5000 63.500	.3125 7.938	2.0310 51.594	.2187 × .3440 × .2030 5.556 × 8.731 × 5.159					980	1,570	325	1 25.400
3.1250 79.375	.3750 9.525	2.5625 65.088	.2812 × .4060 × .2656 7.144 × 10.319 × 6.747	.0008	20	.0008	20	1,570	2,740	665	1-1/4 31.750
3.7500 95.250	.5000 12.700	3.0625 77.788	.3440 × .5000 × .3280 8.731 × 12.700 × 8.334					2,180	4,020	1,100	1-1/2 38.100
4.3750 111.125	.5000 12.700	3.6875 93.662	.3440 × .5000 × .3280 8.731 × 12.700 × 8.334	.0010	25	.0010	25	3,820	7,940	1,760	2 50.800
5.3750 136.525	.7500 19.050	4.5625 115.887	.4062 × .6250 × .3750 10.319 × 15.875 × 9.525					4,700	10,000	3,570	2-1/2 63.500
6.1250 155.575	.7500 19.050	5.3125 134.937	.4062 × .6250 × .3750 10.319 × 15.875 × 9.525					7,350	16,000	5,600	3 76.200
8.0000 203.200	.8750 22.225	7.0000 177.800	.5000 × .7125 × .5000 12.700 × 18.097 × 12.700	.0012 30	.0012 30	14,100	34,800	12,000	4 101.600		

1N ≅ 0.225lbs 1kg ≅ 2.205lbs

SWK TYPE

— Square Flange Type —

This type is an inch dimension series mainly used in the U.S.

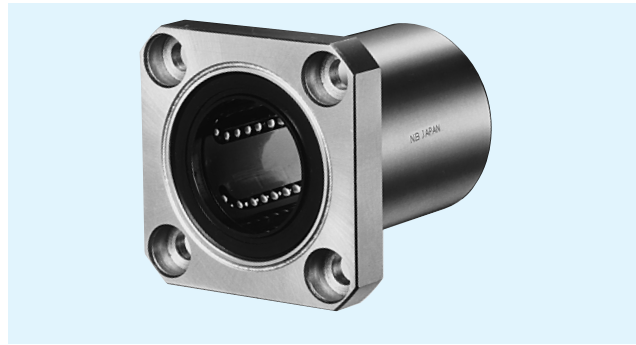


part number structure		example	
		SWSK	16 G UU - SK
specification			
SWK	standard		
SWSK	anticorrosion		
inner contact diameter			
retainer material			
blank	steel		
G	resin		
outer cylinder surface treatment			
blank	no surface treatment		
SK	electroless nickel plating		
RD	Raydent treatment		
SB	black oxide*		
SC	industrial chrome plating		
seal			
blank	without seal		
UU	seals on both sides		

*not available in SWSK type

part number				dr				D		L
standard		anticorrosion		inch	tolerance	inch	tolerance	inch	tolerance	±.012
steel retainer	resin retainer	stainless retainer	resin retainer	mm	inch/μm	mm	inch/μm	mm	inch/μm	±0.3
SWK 4	SWK 4G	SWSK 4	SWSK 4G	.2500 6.350	0 -.00040	.5000 12.700	0 -.00050 -13	.7500 19.050		
SWK 6	SWK 6G	SWSK 6	SWSK 6G	.3750 9.525		.6250 15.875	0 -.00065 -16	.8750 22.225		
SWK 8	SWK 8G	SWSK 8	SWSK 8G	.5000 12.700	0 -9	.8750 22.225	0 -.00065 -16	1.2500 31.750		
SWK10	SWK10G	SWSK10	SWSK10G	.6250 15.875		1.1250 28.575		1.5000 38.100		
SWK12	SWK12G	SWSK12	SWSK12G	.7500 19.050	0 -.00040	1.2500 31.750	0 -.00075 -19	1.6250 41.275		
SWK16	SWK16G	SWSK16	SWSK16G	1.0000 25.400	0 -10	1.5625 39.688	0 -.00090 -22	2.2500 57.150		
SWK20	SWK20G	SWSK20	SWSK20G	1.2500 31.750	0 -.00050	2.0000 50.800	0 -.00090 -22	2.6250 66.675		
SWK24	SWK24G	SWSK24	SWSK24G	1.5000 38.100	0 -12	2.3750 60.325	0 -.00100 -25	3.0000 76.200		
SWK32	SWK32G	SWSK32	SWSK32G	2.0000 50.800		3.0000 76.200		4.0000 101.600		
SWK40	—	—	—	2.5000 63.500	0 -.00060	3.7500 95.250	0 -.00115 -29	5.0000 127.000		
SWK48	—	—	—	3.0000 76.200	0 -15	4.5000 114.300		6.0000 152.400		
SWK64	—	—	—	4.0000 101.600	0 -.00080 -20	6.0000 152.400	0 -.00115 -29	8.0000 203.200		

SLIDE BUSH

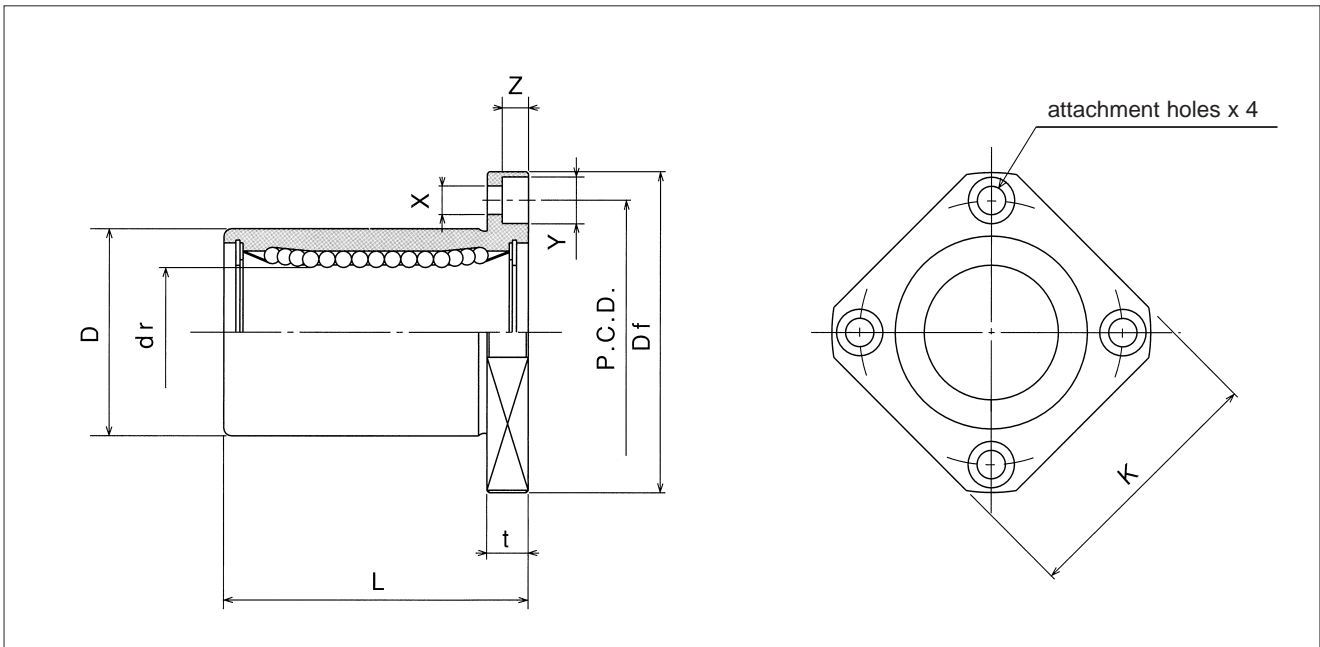


major dimensions					eccentricity	perpendicularity	basic load rating		mass	shaft diameter		
flange							inch	inch			C	Co
Df inch mm	K inch mm	t inch mm	P.C.D. inch mm	X×Y×Z inch mm	μm	μm	N	N		mm		
1.2500 31.750	1.0000 25.400	.0219 5.556	.8750 22.225	.1560 × .2500 × .1410 3.969 × 6.350 × 3.572	.0005	.0005	206	265	25	1/4 6.350		
1.5000 38.100	1.2500 31.750	.2500 6.350	1.0620 26.988	.1875 × .2970 × .1720 4.763 × 7.541 × 4.366			225	314	32	3/8 9.525		
1.7500 44.450	1.3750 34.925	.2500 6.350	1.312 33.338	.1875 × .2970 × .1720 4.763 × 7.541 × 4.366			12	12	510	784	68	1/2 12.700
2.0000 50.800	1.5000 38.100	.2500 6.350	1.5620 39.688	.1875 × .2970 × .1720 4.763 × 7.541 × 4.366			774	1,180	124	5/8 15.875		
2.1875 55.563	1.6875 42.863	.3125 7.938	1.7180 43.660	.2187 × .3440 × .2030 5.556 × 8.731 × 5.159	.0006	.0006	862	1,370	150	3/4 19.050		
2.5000 63.500	2.0000 50.800	.3125 7.938	2.0310 51.594	.2187 × .3440 × .2030 5.556 × 8.731 × 5.159			15	15	980	1,570	280	1 25.400
3.1250 79.375	2.5000 63.500	.3750 9.525	2.5625 65.088	.2812 × .4060 × .2656 7.144 × 10.319 × 6.747	.0008	.0008	1,570	2,740	580	1-1/4 31.750		
3.7500 95.250	3.0000 76.200	.5000 12.700	3.0625 77.788	.3440 × .5000 × .3280 8.731 × 12.700 × 8.334			2,180	4,020	930	1-1/2 38.100		
4.3750 111.125	3.5000 88.900	.5000 12.700	3.6875 93.662	.3440 × .5000 × .3280 8.731 × 12.700 × 8.334	20	20	3,820	7,940	1,580	2 50.800		
5.3750 136.525	4.3750 111.125	.7500 19.050	4.5625 115.887	.4062 × .6250 × .3750 10.319 × 15.875 × 9.525	.0010	.0010	4,700	10,000	3,200	2-1/2 63.500		
6.1250 155.575	5.0000 127.000	.7500 19.050	5.3125 134.937	.4062 × .6250 × .3750 10.319 × 15.875 × 9.525			25	25	7,350	16,000	5,000	3 76.200
8.0000 203.200	6.7500 171.450	.8750 22.225	7.0000 177.800	.5000 × .7125 × .5000 12.700 × 18.097 × 12.700	.0012 30	.0012 30	14,100	34,800	11,300	4 101.600		

1N ≅ 0.225lbs 1kg ≅ 2.205lbs

SWT TYPE


— Two Side Cut Flange Type —

SWT type is an inch dimension series generally used in the U.S.

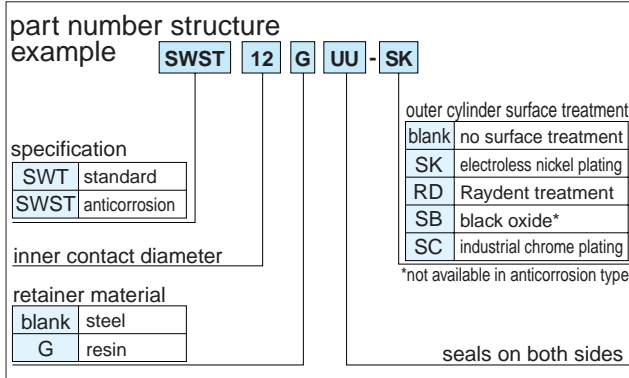

part number***				number of ball circuits	dr		D		L
standard		anticorrosion			inch	tolerance	inch	tolerance	±0.012 inch
steel retainer	resin retainer	stainless retainer	resin retainer			inch		inch	
SWT 4UU	SWT 4GUU	SWST 4UU	SWST 4GUU	4	.2500	0 -.00040	.5000	0/- .00050	.7500
SWT 6UU	SWT 6GUU	SWST 6UU	SWST 6GUU	4	.3750		.6250	0 -.00065	.8750
SWT 8UU	SWT 8GUU	SWST 8UU	SWST 8GUU	4	.5000		.8750	0 -.00075	1.2500
SWT10UU	SWT10GUU	SWST10UU	SWST10GUU	4	.6250		1.1250	0 -.00075	1.5000
SWT12UU	SWT12GUU	SWST12UU	SWST12GUU	5	.7500		1.2500	0 -.00075	1.6250
SWT16UU	SWT16GUU	SWST16UU	SWST16GUU	6	1.0000		1.5625	0 -.00075	2.2500
SWT20UU	SWT20GUU	SWST20UU	SWST20GUU	6	1.2500	0/- .00050	2.0000	0/- .00090	2.6250

*** UU type is standard feature.

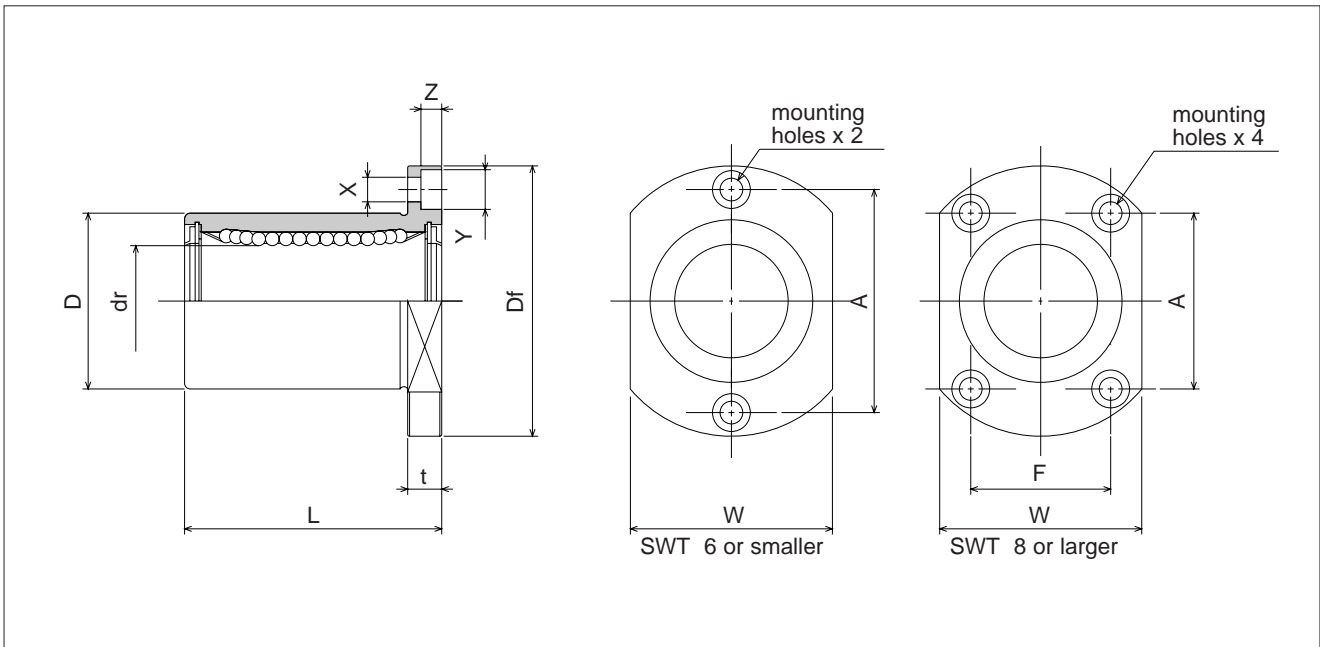


major dimensions						eccentricity	perpendicularity	basic load rating		mass	shaft diameter
flange								dynamic	static		
Df	W	t	A	F	X×Y×Z			C	Co		
inch	inch	inch	inch	inch	inch	inch	inch	N	N	g	inch
1.2500	.7500	.2190	.8750	-	.1560×.2500×.1410	.0005	.0005	206	265	28	1/4
1.5000	.8750	.2500	1.0625	-	.1875×.2970×.1720			225	314	44	3/8
1.7500	1.1250	.2500	1.1250	.6875	.1875×.2970×.1720			510	784	77	1/2
2.0000	1.3750	.2500	1.2500	.9375	.1875×.2970×.1720			774	1,180	125	5/8
2.1875	1.5000	.3125	1.3750	1.0000	.2187×.3440×.2030	.0006	.0006	862	1,370	162	3/4
2.5000	1.8750	.3125	1.5625	1.3125	.2187×.3440×.2030			980	1,570	293	1
3.1250	2.3750	.3750	1.8750	1.7500	.2812×.4060×.2656			1,570	2,740	586	1-1/4

1N ≅ 0.225 ℓ bs 1kg ≅ 2.205 ℓ bs

SWF-W TYPE


— Round Flange Double-Wide Type —

This type is an inch dimension series mainly used in the U.S.

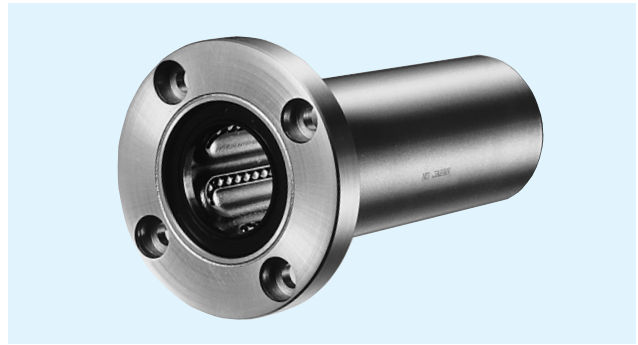

part number structure											
example	SWSF 16 G W UU - SK										
specification	<table border="1"> <tr> <td>SWF</td> <td>standard</td> </tr> <tr> <td>SWSF</td> <td>anticorrosion</td> </tr> </table>	SWF	standard	SWSF	anticorrosion						
SWF	standard										
SWSF	anticorrosion										
inner contact diameter	16										
retainer material	<table border="1"> <tr> <td>blank</td> <td>steel</td> </tr> <tr> <td>G</td> <td>resin</td> </tr> </table>	blank	steel	G	resin						
blank	steel										
G	resin										
double-wide type	UU										
outer cylinder surface treatment	<table border="1"> <tr> <td>blank</td> <td>no surface treatment</td> </tr> <tr> <td>SK</td> <td>electroless nickel plating</td> </tr> <tr> <td>RD</td> <td>Raydent treatment</td> </tr> <tr> <td>SB</td> <td>black oxide*</td> </tr> <tr> <td>SC</td> <td>industrial chrome plating</td> </tr> </table> <p>*not available in SWSF type</p>	blank	no surface treatment	SK	electroless nickel plating	RD	Raydent treatment	SB	black oxide*	SC	industrial chrome plating
blank	no surface treatment										
SK	electroless nickel plating										
RD	Raydent treatment										
SB	black oxide*										
SC	industrial chrome plating										
seal	<table border="1"> <tr> <td>blank</td> <td>without seal</td> </tr> <tr> <td>UU</td> <td>seals on both sides</td> </tr> </table>	blank	without seal	UU	seals on both sides						
blank	without seal										
UU	seals on both sides										

part number								L ±.012 ±0.3 inch mm
standard		anticorrosion		dr		D		
steel retainer	resin retainer	stainless retainer	resin retainer	inch mm	tolerance inch/ μ m	inch mm	tolerance inch/ μ m	
SWF 4W	SWF 4GW	SWSF 4W	SWSF 4GW	.2500 6.350	0 -.00040	.5000 12.700	⁰ -.00050 ₀ -13	1.3750 34.925
SWF 6W	SWF 6GW	SWSF 6W	SWSF 6GW	.3750 9.525		0 -10	.6250 15.875	0
SWF 8W	SWF 8GW	SWSF 8W	SWSF 8GW	.5000 12.700	0 -10	.8750 22.225	-.00065 0 -16	2.3750 60.325
SWF10W	SWF10GW	SWSF10W	SWSF10GW	.6250 15.875		1.1250 28.575		2.8125 71.438
SWF12W	SWF12GW	SWSF12W	SWSF12GW	.7500 19.050	0 -.00050	1.2500 31.750	0 -.00075	3.0937 78.581
SWF16W	SWF16GW	SWSF16W	SWSF16GW	1.0000 25.400	0 -12	1.5625 39.688	0 -19	4.2813 108.744
SWF20W	SWF20GW	SWSF20W	SWSF20GW	1.2500 31.750	0 -.00060	2.0000 50.800	0 -.00090	5.0000 127.000
SWF24W	SWF24GW	SWSF24W	SWSF24GW	1.5000 38.100	0 -15	2.3750 60.325	0 -22	5.6875 144.463
SWF32W	SWF32GW	SWSF32W	SWSF32GW	2.0000 50.800		3.0000 76.200	0 -.00100 0 -25	7.7500 196.850

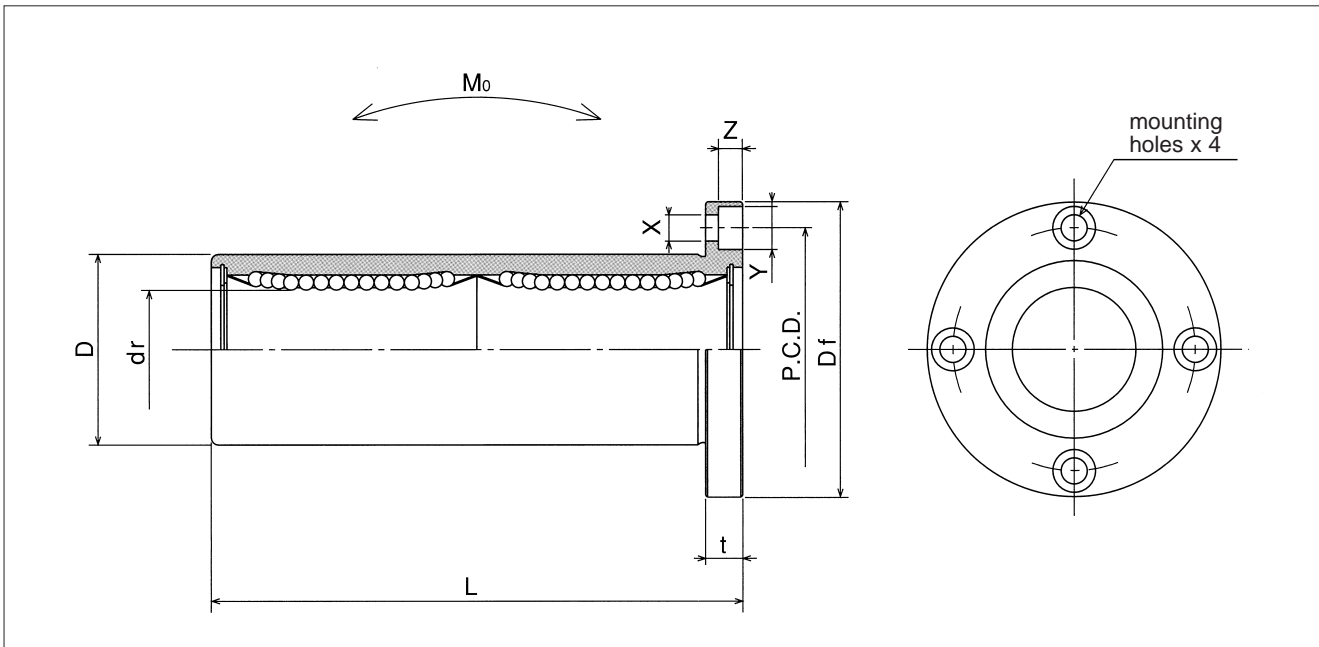


major dimensions				eccentricity	perpendicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						inch	inch			
Df inch mm	t inch mm	P.C.D. inch mm	X×Y×Z inch mm	μm	μm	C N	Co N	Mo N·m	g	inch mm
1.2500 31.750	.2188 5.556	.8750 22.225	.1563 × .2500 × .1406 3.969 × 6.350 × 3.572	.0006	.0006	323	530	2.0	40	1/4 6.350
1.5000 38.100	.2500 6.350	1.0625 26.988	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			353	630	2.7	60	3/8 9.525
1.7500 44.450	.2500 6.350	1.3125 33.338	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			15	15	813	1,570	11.5
2.0000 50.800	.2500 6.350	1.5625 39.688	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366	.0008	.0008	1,230	2,350	20.0	215	5/8 15.875
2.1875 55.563	.3125 7.938	1.7188 43.656	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159			1,370	2,740	26.5	280	3/4 19.050
2.5000 63.500	.3125 7.938	2.0313 51.594	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159			20	20	1,570	3,140	41.2
3.1250 79.375	.3750 9.525	2.5625 65.088	.2813 × .4063 × .2656 7.144 × 10.319 × 6.747	.0010	.0010	2,500	5,490	84.8	1,020	1-1/4 31.750
3.7500 95.250	.5000 12.700	3.0625 77.788	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334			25	25	3,430	8,040	143
4.3750 111.125	.5000 12.700	3.6875 93.662	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334	.0012 30	.0012 30	6,080	15,900	399	2,800	2 50.800

1N ≅ 0.225lbs 1N·m ≅ 0.738lb·ft

SWK-W TYPE

— Square Flange Double-Wide Type —

This type is an inch dimension series mainly used in the U.S.

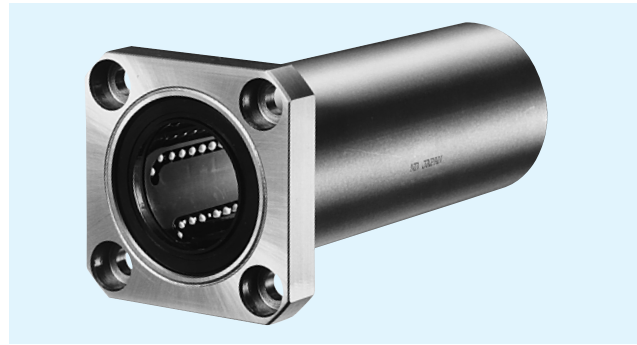


part number structure example		SWSK		16	G	W	UU	-	SK
specification		SWSK		16	G	W	UU	-	SK
inner contact diameter		SWSK		16	G	W	UU	-	SK
retainer material		SWSK		16	G	W	UU	-	SK
double-wide type		SWSK		16	G	W	UU	-	SK
outer cylinder surface treatment		SWSK		16	G	W	UU	-	SK
seal		SWSK		16	G	W	UU	-	SK

SWK	standard
SWSK	anticorrosion
blank	no surface treatment
SK	electroless nickel plating
RD	raydent treatment
SB	black oxide*
SC	industrial chrome plating
blank	steel
G	resin
blank	without seal
UU	seals on both sides

*not available in SWSK type

part number				dr				D		L
standard		anticorrosion		inch	tolerance	inch	tolerance			±0.12
steel retainer	resin retainer	stainless retainer	resin retainer	mm	inch/μm	mm	inch/μm			±0.3
SWK 4W	SWK 4GW	SWSK 4W	SWSK 4GW	.2500 6.350	0 -.00040	.5000 12.700	0 -13	0 0		1.3750 34.925
SWK 6W	SWK 6GW	SWSK 6W	SWSK 6GW	.3750 9.525		.6250 15.875	0	0		1.5938 40.481
SWK 8W	SWK 8GW	SWSK 8W	SWSK 8GW	.5000 12.700	0 -10	.8750 22.225	0 -16	0 0		2.3750 60.325
SWK10W	SWK10GW	SWSK10W	SWSK10GW	.6250 15.875		1.1250 28.575	0	0		2.8125 71.438
SWK12W	SWK12GW	SWSK12W	SWSK12GW	.7500 19.050	0 -12	1.2500 31.750	0 -19	0 0		3.0937 78.581
SWK16W	SWK16GW	SWSK16W	SWSK16GW	1.0000 25.400		1.5625 39.688	0	0		4.2813 108.744
SWK20W	SWK20GW	SWSK20W	SWSK20GW	1.2500 31.750	0 -15	2.0000 50.800	0 -22	0 0		5.0000 127.000
SWK24W	SWK24GW	SWSK24W	SWSK24GW	1.5000 38.100		2.3750 60.325	0	0		5.6875 144.463
SWK32W	SWK32GW	SWSK32W	SWSK32GW	2.0000 50.800	0 -25	3.0000 76.200	0 -25	0 0		7.7500 196.850

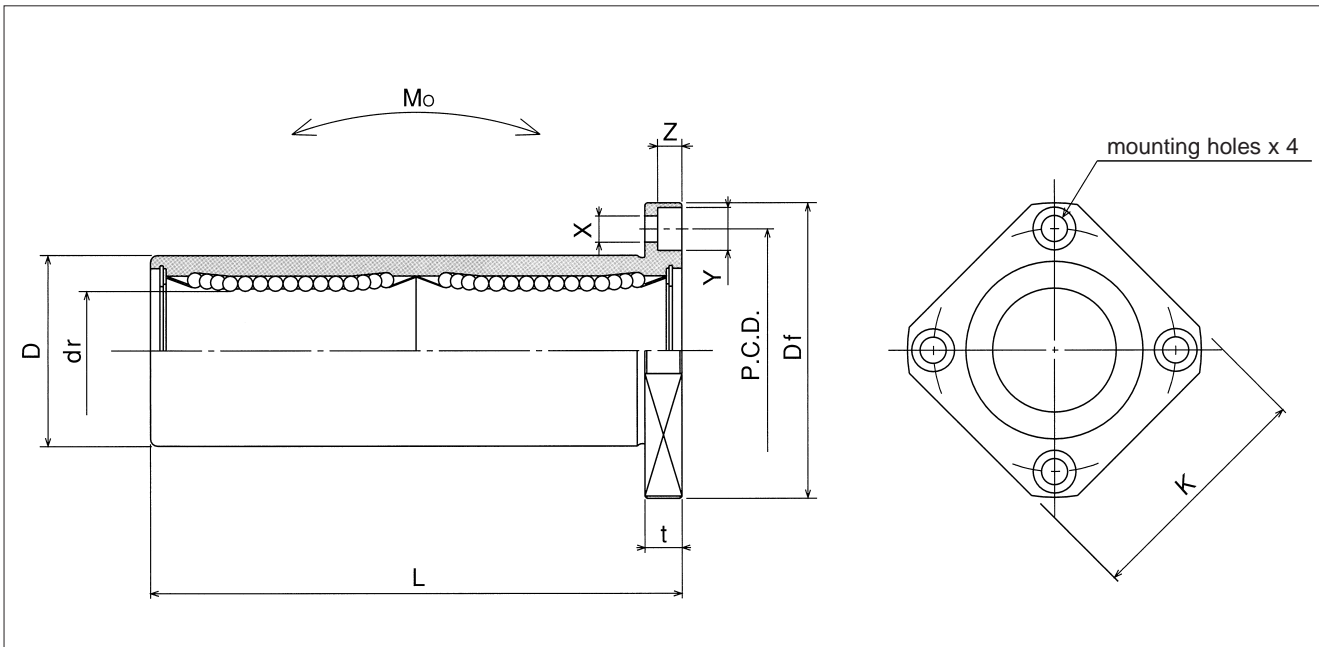


major dimensions					eccentricity inch μ m	perpen- dicularity inch μ m	basic load rating		allowable static moment Mo N·m	mass g	shaft diameter inch mm
flange							dynamic	static			
Df inch mm	K inch mm	t inch mm	P.C.D. inch mm	X×Y×Z inch mm	C N	Co N					
1.2500 31.750	1.0000 25.400	.2188 5.556	.8750 22.225	.1563 × .2500 × .1406 3.969 × 6.350 × 3.572	.0006	.0006	323	530	2.0	33	1/4 6.350
1.5000 38.100	1.2500 31.750	.2500 6.350	1.0625 26.988	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			353	630	2.7	45	3/8 9.525
1.7500 44.450	1.3750 34.925	.2500 6.350	1.3125 33.338	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			813	1,570	11.5	106	1/2 12.700
2.0000 50.800	1.5000 38.100	.2500 6.350	1.5625 39.688	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			1,230	2,350	20.0	200	5/8 15.875
2.1875 55.563	1.6875 42.863	.3125 7.938	1.7188 43.656	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159	.0008	.0008	1,370	2,740	26.5	240	3/4 19.050
2.5000 63.500	2.0000 50.800	.3125 7.938	2.0313 51.594	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159			1,570	3,140	41.2	470	1 25.400
3.1250 79.375	2.5000 63.500	.3750 9.525	2.5625 65.088	.2813 × .4063 × .2656 7.144 × 10.319 × 6.747	.0010	.0010	2,500	5,490	84.8	935	1-1/4 31.750
3.7500 95.250	3.0000 76.200	.5000 12.700	3.0625 77.788	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334			3,430	8,040	143	1,460	1-1/2 38.100
4.3750 111.125	3.5000 88.900	.5000 12.700	3.6875 93.662	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334	.0012 30	.0012 30	6,080	15,900	399	2,620	2 50.800

1N \approx 0.225lbs 1N·m \approx 0.738lb·ft


SWFC TYPE

– Center Mount Round Flange Type –

This type is an inch dimension series mainly used in the U.S.

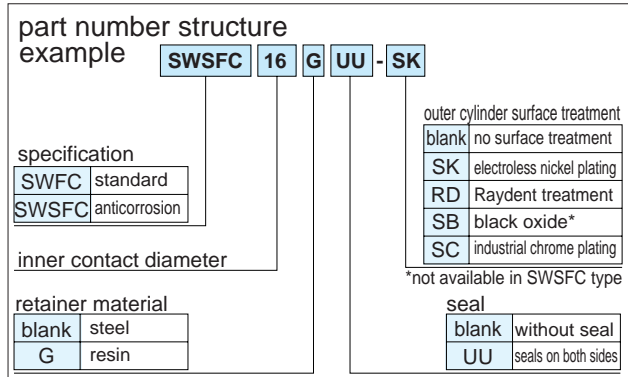

part number				dr		D		L	∅
standard		anticorrosion		inch	tolerance	inch	tolerance	±.012 ±0.3 inch mm	inch mm
steel retainer	resin retainer	stainless retainer	resin retainer	mm	inch/μm	mm	inch/μm		
SWFC 4	SWFC 4G	SWSFC 4	SWSFC 4G	.2500 6.350	- .00040 0	.5000 12.700	⁰ - .00050 0 -13	1.3750 34.925	.5781 14.684
SWFC 6	SWFC 6G	SWSFC 6	SWSFC 6G	.3750 9.525		.6250 15.875	⁰ - .00065 0 -16	1.5938 40.481	.6719 17.066
SWFC 8	SWFC 8G	SWSFC 8	SWSFC 8G	.5000 12.700	-10	.8750 22.225	⁰ - .00075 0 -19	2.3750 60.325	1.0625 26.988
SWFC10	SWFC10G	SWSFC10	SWSFC10G	.6250 15.875		1.1250 28.575	⁰ - .00090 0 -22	2.8125 71.438	1.2813 32.544
SWFC12	SWFC12G	SWSFC12	SWSFC12G	.7500 19.050	-12	1.2500 31.750	⁰ - .00100 0 -25	3.0937 78.581	1.3906 35.322
SWFC16	SWFC16G	SWSFC16	SWSFC16G	1.0000 25.400		1.5625 39.688	⁰ - .00060 0 -15	4.2813 108.744	1.9844 50.403
SWFC20	SWFC20G	SWSFC20	SWSFC20G	1.2500 31.750	-15	2.0000 50.800	⁰ - .00100 0 -25	5.0000 127.000	2.3125 58.738
SWFC24	SWFC24G	SWSFC24	SWSFC24G	1.5000 38.100		2.3750 60.325	⁰ - .00100 0 -25	5.6875 144.463	2.5938 65.882
SWFC32	SWFC32G	SWSFC32	SWSFC32G	2.0000 50.800		3.0000 76.200	⁰ - .00100 0 -25	7.7500 196.850	3.6250 92.075

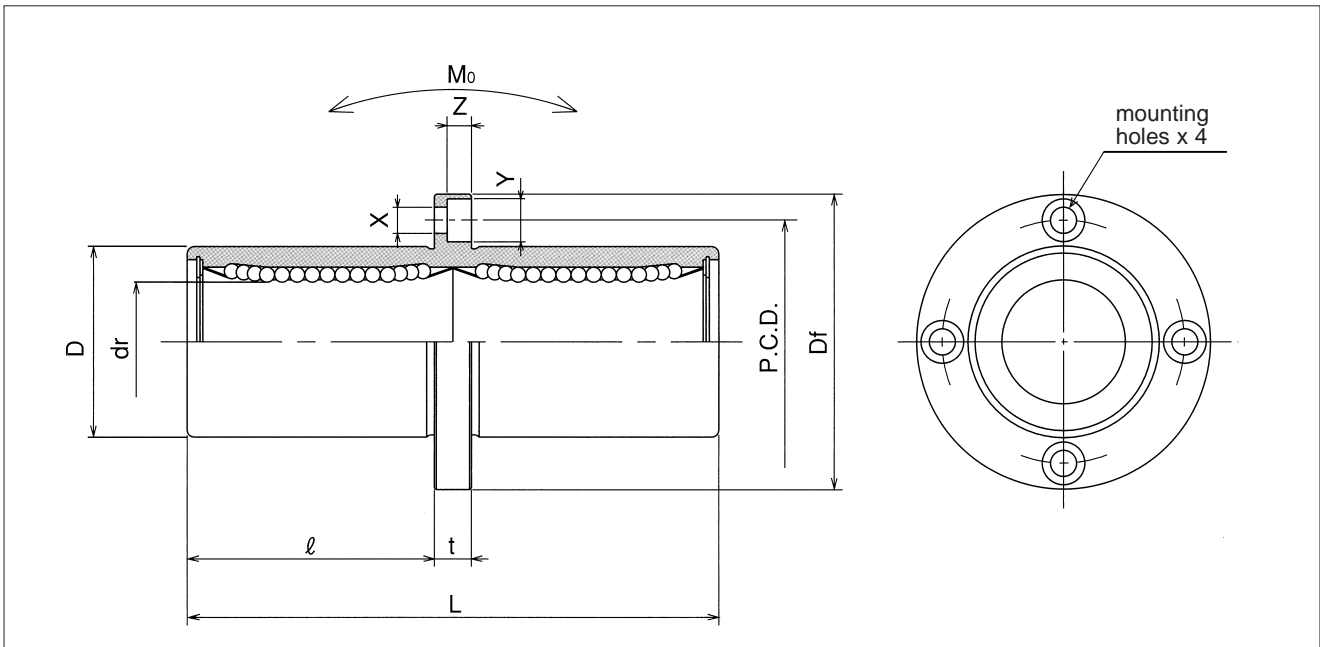



major dimensions				eccentricity	perpen- dicularity	basic load rating		allowable static moment	mass	shaft diameter
flange						dynamic	static			
Df inch mm	t inch mm	P.C.D. inch mm	X×Y×Z inch mm	inch μm	inch μm	C N	Co N	Mo N·m	g	inch mm
1.2500 31.750	.2188 5.556	.8750 22.225	.1563 × .2500 × .1406 3.969 × 6.350 × 3.572	.0006	.0006	323	530	2.0	40	1/4 6.350
1.5000 38.100	.2500 6.350	1.0625 26.988	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			353	630	2.7	60	3/8 9.525
1.7500 44.450	.2500 6.350	1.3125 33.338	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			813	1,570	11.5	126	1/2 12.700
2.0000 50.800	.2500 6.350	1.5625 39.688	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			1,230	2,350	20.0	215	5/8 15.875
2.1875 55.563	.3125 7.938	1.7188 43.656	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159	.0008	.0008	1,370	2,740	26.5	280	3/4 19.050
2.5000 63.500	.3125 7.938	2.0313 51.594	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159			1,570	3,140	41.2	515	1 25.400
3.1250 79.375	.3750 9.525	2.5625 65.088	.2813 × .4063 × .2656 7.144 × 10.319 × 6.747	.0010	.0010	2,500	5,490	84.8	1,020	1-1/4 31.750
3.7500 95.250	.5000 12.700	3.0625 77.788	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334			3,430	8,040	143	1,630	1-1/2 38.100
4.3750 111.125	.5000 12.700	3.6875 93.662	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334	.0012 30	.0012 30	6,080	15,900	399	2,800	2 50.800

1N ≅ 0.225lbs 1N·m ≅ 0.738lb·ft


SWKC TYPE

– Center Mount Square Flange Type –

This type is an inch dimension series mainly used in the U.S.

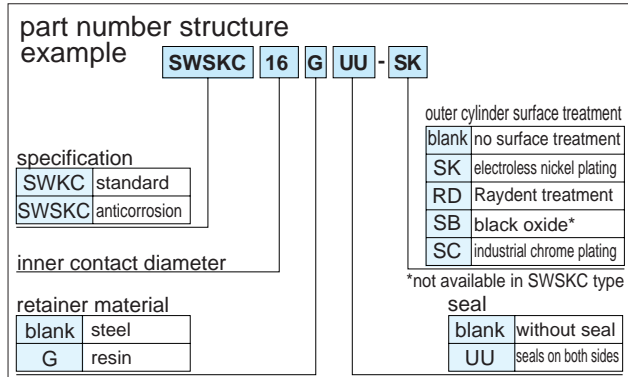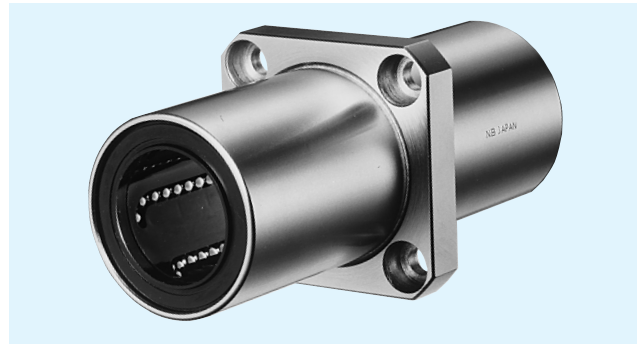

part number				dr		D		L	∅
standard		anticorrosion		inch	tolerance	inch	tolerance	±.012 ±0.3 inch mm	inch mm
steel retainer	resin retainer	stainless retainer	resin retainer	mm	inch/μm	mm	inch/μm		
SWKC 4	SWKC 4G	SWSKC 4	SWSKC 4G	.2500 6.350	0 -100040	.5000 12.700	0 -13	1.3750 34.925	.5781 14.684
SWKC 6	SWKC 6G	SWSKC 6	SWSKC 6G	.3750 9.525		.6250 15.875	0	1.5938 40.481	.6719 17.066
SWKC 8	SWKC 8G	SWSKC 8	SWSKC 8G	.5000 12.700	0 -10	.8750 22.225	0 -16	2.3750 60.325	1.0625 26.988
SWKC10	SWKC10G	SWSKC10	SWSKC10G	.6250 15.875		1.1250 28.575		2.8125 71.438	1.2813 32.544
SWKC12	SWKC12G	SWSKC12	SWSKC12G	.7500 19.050	0 -12	1.2500 31.750	0 -19	3.0937 78.581	1.3906 35.322
SWKC16	SWKC16G	SWSKC16	SWSKC16G	1.0000 25.400		1.5625 39.688		4.2813 108.744	1.9844 50.403
SWKC20	SWKC20G	SWSKC20	SWSKC20G	1.2500 31.750	0 -15	2.0000 50.800	0 -22	5.0000 127.000	2.3125 58.738
SWKC24	SWKC24G	SWSKC24	SWSKC24G	1.5000 38.100		2.3750 60.325		5.6875 144.463	2.5938 65.882
SWKC32	SWKC32G	SWSKC32	SWSKC32G	2.0000 50.800		3.0000 76.200	0 -25	7.7500 196.850	3.6250 92.075


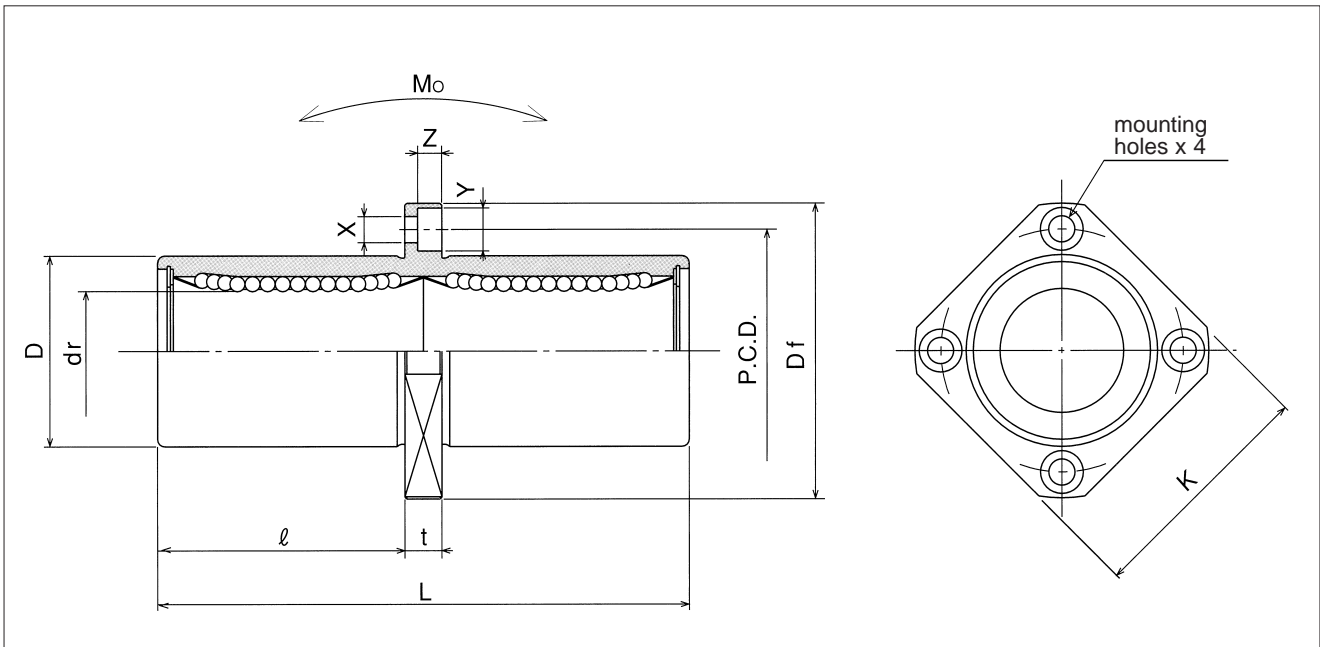


major dimensions					eccentricity	perpen- dicularity	basic load rating		allowable static moment	mass	shaft diameter
flange							dynamic	static			
Df inch mm	K inch mm	t inch mm	P.C.D. inch mm	X×Y×Z inch mm	inch μm	inch μm	C N	Co N	Mo N·m	g	inch mm
1.2500 31.750	1.0000 25.400	.2188 5.556	.8750 22.225	.1563 × .2500 × .1406 3.969 × 6.350 × 3.572	.0006	15	323	530	2.0	33	1/4 6.350
1.5000 38.100	1.2500 31.750	.2500 6.350	1.0625 26.988	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			353	630	2.7	45	3/8 9.525
1.7500 44.450	1.3750 34.925	.2500 6.350	1.3125 33.338	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			813	1,570	11.5	106	1/2 12.700
2.0000 50.800	1.5000 38.100	.2500 6.350	1.5625 39.688	.1875 × .2969 × .1719 4.763 × 7.541 × 4.366			1,230	2,350	20.0	200	5/8 15.875
2.1875 55.563	1.6875 42.863	.3125 7.938	1.7188 43.656	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159	.0008	20	1,370	2,740	26.5	240	3/4 19.050
2.5000 63.500	2.0000 50.800	.3125 7.938	2.0313 51.594	.2188 × .3438 × .2031 5.556 × 8.731 × 5.159			1,570	3,140	41.2	470	1 25.400
3.1250 79.375	2.5000 63.500	.3750 9.525	2.5625 65.088	.2813 × .4063 × .2656 7.144 × 10.319 × 6.747	.0010	25	2,500	5,490	84.8	935	1-1/4 31.750
3.7500 95.250	3.0000 76.200	.5000 12.700	3.0625 77.788	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334			3,430	8,040	143	1,460	1-1/2 38.100
4.3750 111.125	3.5000 88.900	.5000 12.700	3.6875 93.662	.3437 × .5000 × .3281 8.731 × 12.700 × 8.334	.0012 30	.0012 30	6,080	15,900	399	2,620	2 50.800

1N ≅ 0.225lbs 1N·m ≅ 0.738lb·ft

GW TYPE

– Single Type –

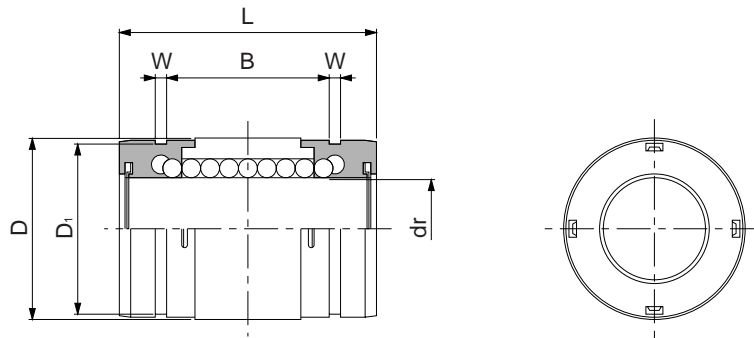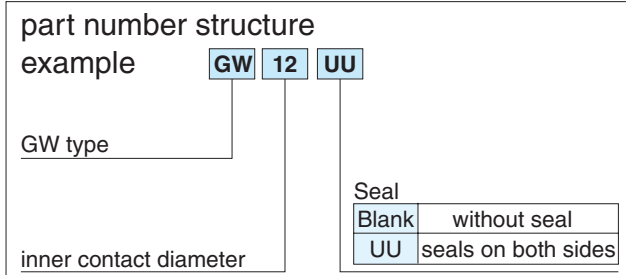

part number	number of ball circuits	major dimensions								basic load rating		mass g
		dr		D		L	B	W	D ₁	dynamic C N	static C ₀ N	
		inch	tolerance inch	inch	tolerance inch							
GW 4	4	.2500	0 - .00040	.5000	0/- .00045	.7500	.4329	.0390	.4687	206	265	5.4
GW 6	4	.3750		.6250	0 - .00050	.8750	.5577	.0390	.5880	225	314	7.8
GW 8	4	.5000		.8750		1.2500	.8710	.0459	.8209	510	784	26
GW 10	4	.6250		1.1250	1.5000	.9920	.0559	1.0590	774	1,180	51	
GW 12	6	.7500		1.2500	1.6250	1.0538	.0559	1.1760	862	1,370	72	
GW 16	6	1.0000		1.5625	2.2500	1.6187	.0679	1.4687	980	1,570	138	
GW 20	6	1.2500		2.0000	2.6250	1.8687	.0679	1.8859	1,570	2,740	269	

1N ≙ 0.225lbs 1kg ≙ 2.205lbs