

BALL SPLINE ROTARY BALL SPLINE STROKE BALL SPLINE

SLIDE GUIDE

BALL SPLINE
ROTARY BALL SPLINE
STROKE BALL SPLINE

TOPBALL® PRODUCTS

SLIDE BUSH

SLIDE UNIT

STROKE BUSH
SLIDE ROTARY BUSH

SLIDE SHAFT

SLIDE WAY/GONIO WAY
SLIDE TABLE
MINIATURE SLIDE

ACTUATOR

SLIDE SCREW

BALL SPLINE

The NB ball spline is a linear motion mechanism utilizing the rotational motion of ball elements. It can be used in a wide variety of applications including robotics and transport type equipment.

STRUCTURE AND ADVANTAGES

The NB ball spline consists of a spline shaft with raceway grooves and a spline nut. The spline nut consists of an outer cylinder (main body), retainer, side rings, and ball elements. Designed and manufactured to achieve a reliably smooth motion.

High Load Capacity and Long Travel Life:

The raceway grooves are machined to a radius close to that of the ball elements. The large ball contact area results in high load capacity and long travel life.

Wide Variety of Configurations:

16 shaft sizes with diameters from 4mm to 100mm are available. Seven different types of nuts are available: cylindrical types (SSP/SSPM), flange types (SSPF/SSPT), and block types (SPA/SPA-W/SSPB). Material option of Stainless steel(440C or equivalent) is also available. They can be specified to suit various applications.

Transmission of Torque:

NB ball splines can sustain loads in several directions simultaneously. They can be used as a single shaft system and can transmit (or resist) torque.


Ease of Additional Custom Machining:

Since a round shaft with raceway grooves is used, NB ball spline shafts can be machined easily to customized specifications.

High-Speed Motion and High-Speed Rotation:

The outer cylinder is compact and well balanced, resulting in good performance at high speed.

Figure B-1 Basic Structure of NB Ball Spline

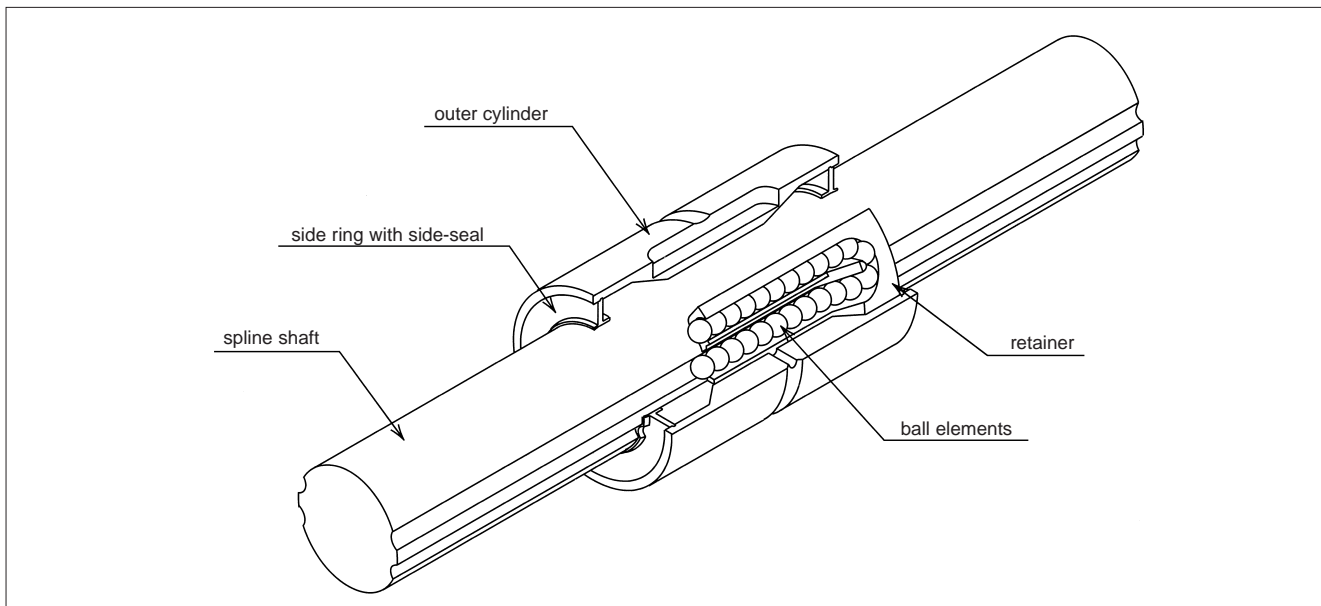

TYPE

TYPES OF SPLINE NUT:

A wide variety of spline nut designs are available and all spline nuts come with a side-seal as a standard feature.

Table B-1 Types of Spline Nut









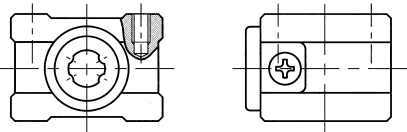
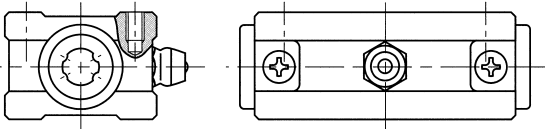
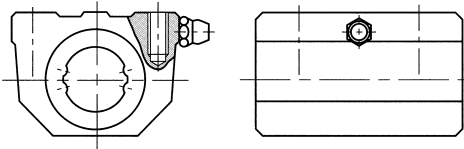
type of nut		shape and advantage		page number for dimension table	
cylindrical type	SSP SSPS			<ul style="list-style-type: none"> cylindrical spline nut with key groove with special key nominal diameter: SSP4-100 : SSPS4-25 	P.B-16
	SSPM			<ul style="list-style-type: none"> cylindrical spline nut without key groove with two lock plates for fixing nominal diameter: 6mm-10mm 	P.B-18
flange type	SSPF SSPFS			<ul style="list-style-type: none"> spline nut with flange nominal diameter: SSPF6-60 : SSPFS6-25 	P.B-20
	SSPT			<ul style="list-style-type: none"> spline nut with a two side cut flange nominal diameter: 6mm-10mm 	P.B-22




Table B-2 Types of Spline Nut

type of nut		shape and advantage	page number for dimension table
block type	SPA	 <ul style="list-style-type: none"> • aluminum housing • lightweight and compact • with keyless spline • nominal diameter: 6mm-10mm 	P.B-24
	SPA-W	 <ul style="list-style-type: none"> • aluminum housing • can sustain high moment loading • with two keyless splines • with grease fitting • nominal diameter: 6mm-10mm 	P.B-26
	SSPB	 <ul style="list-style-type: none"> • cast block • spline grooves are machined directly on main body • high rigidity • with grease fitting • nominal diameter: 20mm-40mm 	P.B-28

TYPES OF SPLINE SHAFT:

Depending on the application requirements, either a fully machine ground spline shaft or a commercial grade spline shaft can be specified.

Table B-3 Types of Spline Shaft

type of spline shaft	shape and advantage
ground spline shaft	 <ul style="list-style-type: none"> • precision-ground and precision machined surface finish • high precision • possible to machine ends of spline shaft and surface finish • nominal diameter: 4mm-100mm
standard spline shaft	 <ul style="list-style-type: none"> • standard dimension and shape • accuracy grade: high grade • short lead time • nominal diameter: 4mm-60mm (Refer to page B-30)
commercial shaft (non-ground)	 <ul style="list-style-type: none"> • for general industrial use • with special finished raceway surface • low cost • possible to machine ends of spline shaft and surface finish • nominal diameter: 20mm-50mm • maximum length: 5000mm (Refer to page B-31)

ACCURACY

The NB ball spline is measured for accuracy at points shown in Figure B-2 and categorized as either high-grade or precision-grade (P). Contact NB for accuracy information on the commercial type ball spline.

Table B-4 Tolerance of Spline Shaft and groove torsion

type of shaft	ground shaft	
	high	precision (P)
tolerance	13 μ m/100mm	6 μ m/100mm

Figure B-2 Accuracy Measurement Points

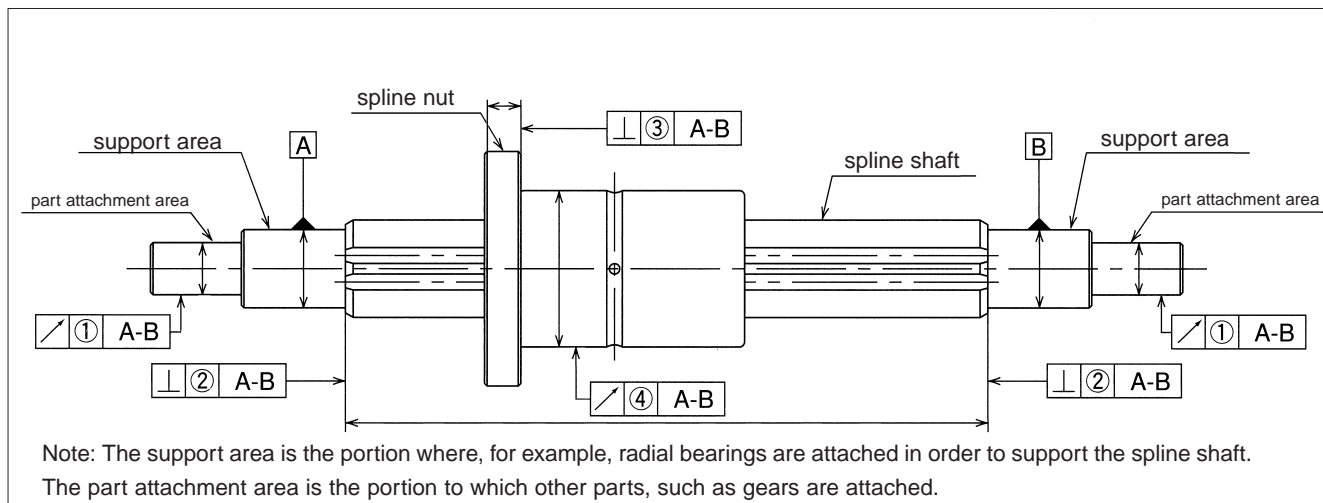


Table B-5 Tolerance of Parts Relative to Spline Support Area (Max.)

unit/ μ m

part number	radial run-out of part attachment area ①		perpendicularity of the end of the spline shaft section ②		perpendicularity of the flange ③	
	high-grade	precision-grade	high-grade	precision-grade	high-grade	precision-grade
SSP 4	14	8	9	6	—	—
SSP 6					11	8
SSP 8					13	9
SSP 10	17	10				
SSP 13A	19	12				
SSP 16A			11	8		
SSP 20A			13	9		
SSP 20						
SSP 25A	22	13	13	9	16	11
SSP 25						
SSP 30						
SSP 40	25	15	16	11	19	13
SSP 50						
SSP 60						
SSP 80 · 80L	29	17	19	13	22	15
SSP100 · 100L	34	20	22	15	—	—

Table B-6 ④Radial Run-Out of Outer Surface of Spline Nut Relative to Spline Shaft Support Area (Max.)

 unit/ μm

total length of spline shaft (mm)		part number															
		SSP4 SSP6 SSP8		SSP10		SSP13A SSP16A		SSP20A SSP25A		SSP20 SSP25 SSP30		SSP40 SSP50		SSP60 SSP80 SSP80L		SSP100 SSP100L	
greater than	or less	high-grade	precision grade	high-grade	precision grade	high-grade	precision grade	high-grade	precision grade	high-grade	precision grade	high-grade	precision grade	high-grade	precision grade	high-grade	precision grade
—	200	46	26	36	20	34	18	32	18	32	18	32	16	30	16	30	16
200	315	89	57	54	32	45	25	39	21	39	21	36	19	34	17	32	17
315	400	126*	82*	68	41	53	31	44	25	44	25	39	21	36	19	34	17
400	500	163*	108*	82	51	62	38	50	29	50	29	43	24	38	21	35	19
500	630	—	—	102	65	75	46	57	34	57	34	47	27	41	23	37	20
630	800	—	—	—	—	92	58	68	42	68	42	54	32	45	26	40	22
800	1,000	—	—	—	—	115	75	83	52	83	52	63	38	51	30	43	24
1,000	1,250	—	—	—	—	153	97	102	65	102	65	76	47	59	35	48	28
1,250	1,600	—	—	—	—	195*	127*	130	85	130	85	93	59	70	43	55	33
1,600	2,000	—	—	—	—	—	—	171	116	171	116	118	77	86	54	65	40

*SSP4 maximum fabrication length: 300mm; SSP6 maximum fabrication length: 400mm; SSP13A, 16A maximum fabrication length: 1500mm

**For lengths exceeding 2000mm, contact NB.

PRE-LOAD AND CLEARANCE IN ROTATIONAL DIRECTION

Both the clearance and pre-load are expressed in terms of clearance in the rotational direction. The pre-load is categorized into three different levels : standard, light (T1), and medium (T2). A pre-load cannot be specified when using the commercial grade spline shaft.

 Table B-7 Pre-Load and Clearance in Rotational Direction unit/ μm

part number	standard	light (T1)	medium (T2)
SSP 4	-2~+1	-6~-2	—
SSP 6			
SSP 8			
SSP 10	-3~+1	-9~-3	-13~-7
SSP 13A			
SSP 16A			
SSP 20A	-4~+2	-12~-4	-20~-12
SSP 20			
SSP 25A			
SSP 25			
SSP 30	-6~+3	-18~-6	-30~-18
SSP 40			
SSP 50			
SSP 60			
SSP 80(L)	-8~+4	-24~-8	-40~-24
SSP100(L)			

Table B-8 Operating Condition and Pre-Load

pre-load	pre-load symbol	operating condition
standard	—	Minute vibration is applied. A precise motion is required. A torque in a given direction is applied.
light	T1	Slight vibration is applied. Slight torsional load is applied. Cyclic torque is applied
medium	T2	Shock/vibration is applied. Over-hang load is applied. Torsional load is applied.

LIFE CALCULATION

Because ball elements are used as the rolling elements in ball splines, the following equations are used to calculate the life of ball spline systems.

For radial load

$$L = \left(\frac{f_c}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50$$

For torsional load

$$L = \left(\frac{f_c}{f_w} \cdot \frac{C_T}{T} \right)^3 \cdot 50$$

L : travel life (km)

f_c : contact coefficient

f_w : Load coefficient

C : basic dynamic load rating(N)

P : load(N) C_T : basic dynamic torque rating(N-m)

T : torque(N-m)

* Refer to page Eng-5 for coefficients

** The rated load for the commercial spline shaft is approximately 70% of the standard ball spline shaft.

OPERATING ENVIRONMENT

The performance of a ball spline system is affected by the operating condition and environment of the application. The operating conditions should therefore be carefully taken into consideration.

Dust Prevention:

The invasion of foreign particles and dust may affect the motion characteristics and shorten the life of a ball spline. Seals will perform well under normal operating conditions. However, they may not prevent the entry of foreign particles in a hostile environment. When used in such an environment, the ball spline should be protected using bellows and protective covers.

Operating Temperature:

The ball retainers used in ball spline nuts are made of resin, so the operating temperature should never exceed 80°C.

Figure B-3 Radial Loading and Torque Loading


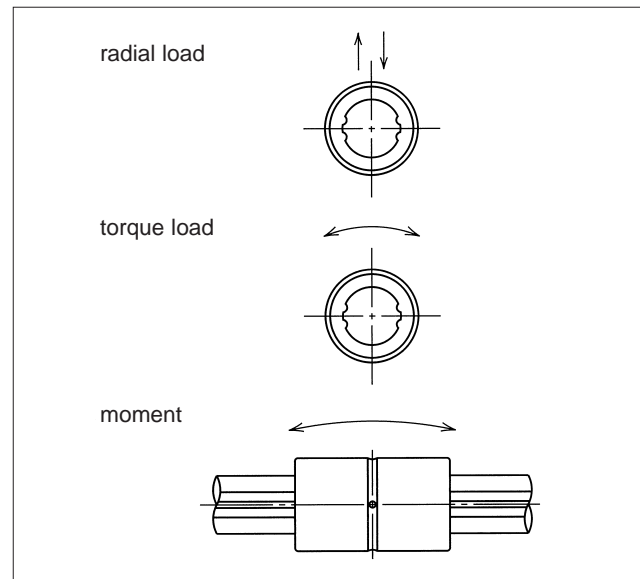


Figure B-4 Examples of Dust Prevention Methods

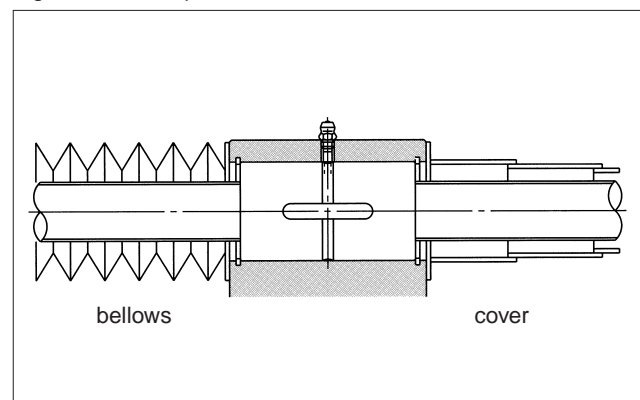

Excessive Moment:


The allowable load for ball splines is high, and they can also sustain high moment load. However, when the load becomes excessive, the load applied to the raceway grooves becomes unbalanced and stable motion may not be achieved. When accuracy is required, the application of excessive moment should be prevented by using two or more spline nuts.

LUBRICATION

Both ends of the spline nut have a side-seal as a standard feature. For the fully ground spline shaft, the side-seals are positioned against the spline shaft so as to prevent the lubricant from leaking out of the spline nut.

Lithium soap grease is applied to NB ball spline nuts before shipping, so there is no need to apply lubricant at the time of installation. However, a small amount of lubricant may be lost during operation, so the lubricant needs to be replenished periodically.

Figure B-5 Example of Lubrication Mechanism

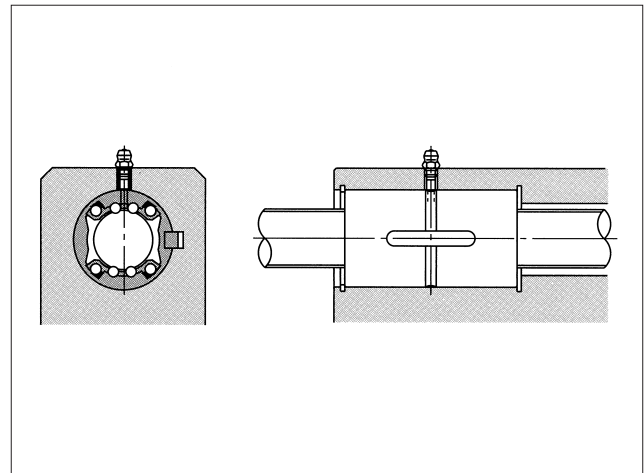

SPECIAL REQUIREMENTS

NB will fabricate custom shafts, spline nut, surface finish, etc. to meet customer requirements. For hollow spline shafts, recommended standard inner diameters are listed in Table B-9. Contact NB for details.

Figure B-6 Example of End-Machining


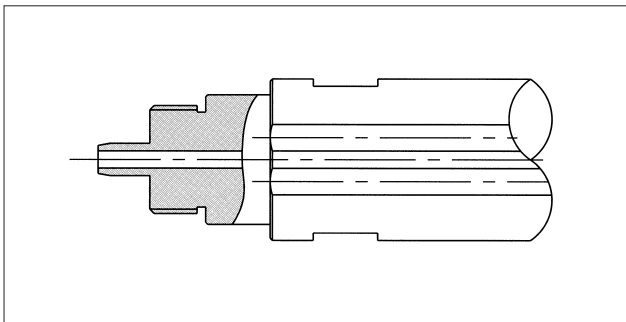


Table B-9 Recommended Inner Diameter for Hollow Spline Shaft

part number	shaft diameter	inner diameter	cross-sectional coefficient	second moment of inertia
	Ds mm	d mm	Z mm ³	I mm ⁴
SSP 4	4	1.5	5.7	11
SSP 6	6	2	19.4	58
SSP 8	8	3	46.5	186
SSP 10	10	4	89.6	448
SSP 13A	13	6	193	1,260
SSP 16A	16	8	348	2,780



MOUNTING

Fit:

A transition fit between an SSP/SSPM-type spline nut and its housing bore is used to minimize the clearance. If high accuracy is not required, then a clearance fit is used.

For the SSP/SSPM type spline nuts, if only a light load is to be applied, a hole slightly larger than the outer diameter of the nut will suffice.

Insertion of Spline Nut:

When inserting a spline nut into the housing, use a jig, example as shown in Figure B-7. Carefully insert the nut so as not to hit the side ring and side-seal.

Table B-11 Recommended Jig Dimensions unit/mm

part number	D	d	part number	D	d
SSP 4	9.5	3.5	SSP 25	36.5	20.5
SSP 6	13.5	5	SSP 30	44.5	25
SSP 8	15.5	7	SSP 40	59.5	33
SSP10	20.5	8.5	SSP 50	74	41
SSP13A	23.5	12	SSP 60	89	50
SSP16A	30.5	14.5	SSP 80	119	74
SSP20A	34.5	18	SSP 80L		
SSP20	31.5	16.5	SSP100	149	92
SSP25A	41.5	22.5	SSP100L		


Insertion of Spline Shaft:

Insertion of Spline Shaft: When inserting the spline shaft into the spline nut, ensure that the ball elements do not drop out. This is accomplished by aligning the raceway grooves of the shaft with the rows of ball elements in the nut. Then simply insert the spline shaft through the spline nut.

Table B-10 Fit for the Spline Nut

type of spline nut	clearance fit	transition fit
SSP	H7	J6
SSPM		

Figure B-7 Insertion of Spline Nute into Housing

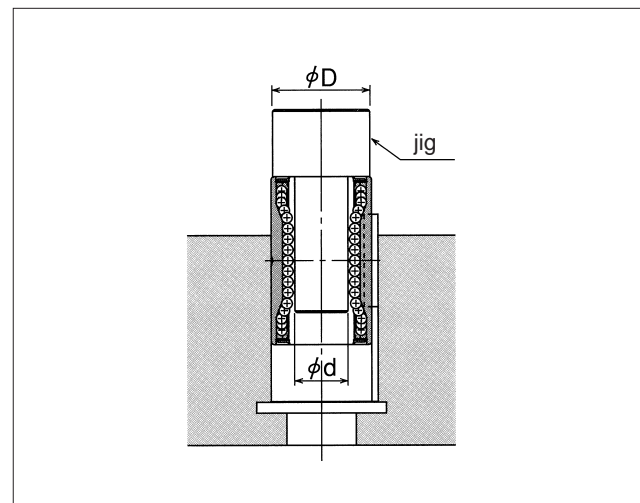

Mounting of SSP Type Spline:

Example methods for installing the SSP type spline are shown in Figures B-8 and B-9.

Figure B-8 Using a Retaining Ring


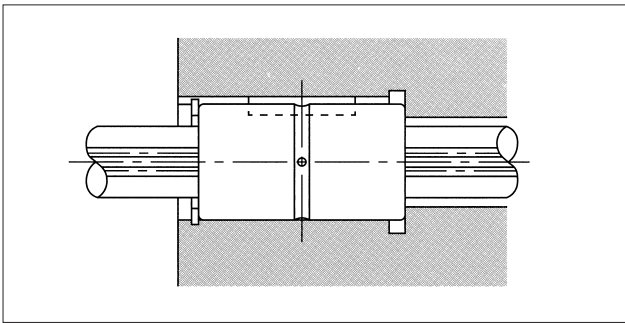


Figure B-9 Using a Push Plate

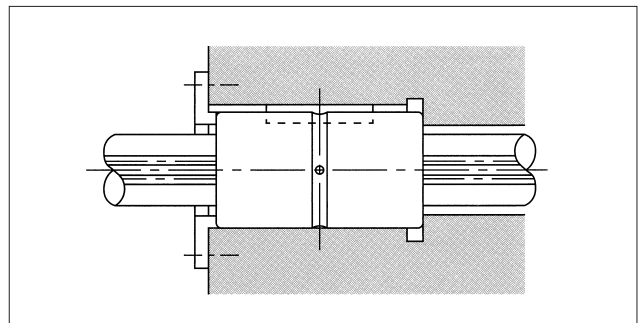

Key:

The SSP type spline comes with a key, as shown in Figure B-10.

Figure B-10 Key for SSP Type Spline

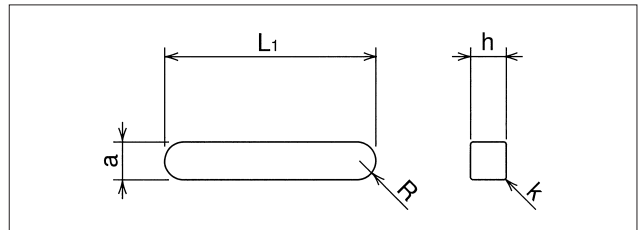


Table B-12 Major Dimensions of Key (SSP Type)

part number	a		h		L ₁ mm	R mm	k mm
	mm	tolerance μm	mm	tolerance μm			
SSP 4	2	+16 +6	2	0 -25	6	1	0.2
SSP 6	2.5		2.5		10.5	1.25	
SSP 8	2.5		2.5		10.5	1.25	
SSP 10	3		3		13	1.5	
SSP 13A	3		3		15	1.5	
SSP 16A	3.5	+24 +12	3.5	0 -30	17.5	1.75	0.5 0.2 0.3
SSP 20A	4		4		29	2	
SSP 20			4		26		
SSP 25A			4		36		
SSP 25	5		5		33	2.5	
SSP 30	7	7	41	3.5			
SSP 40	10	8	55	5			
SSP 50	15	10	60	7.5			
SSP 60	18	+36	11	0/-43	68	9	0.5
SSP 80	16	+18	10	-36	76	8	
SSP 80L					110		
SSP100	20	+43	13	-43	110	10	0.8
SSP100L		+22			160		

Mounting of SSPM Type Spline:

Example methods for installing the SSPM spline are shown in Figures B-11 to B-14.

Figure B-11 Using an F Type Lock Plate

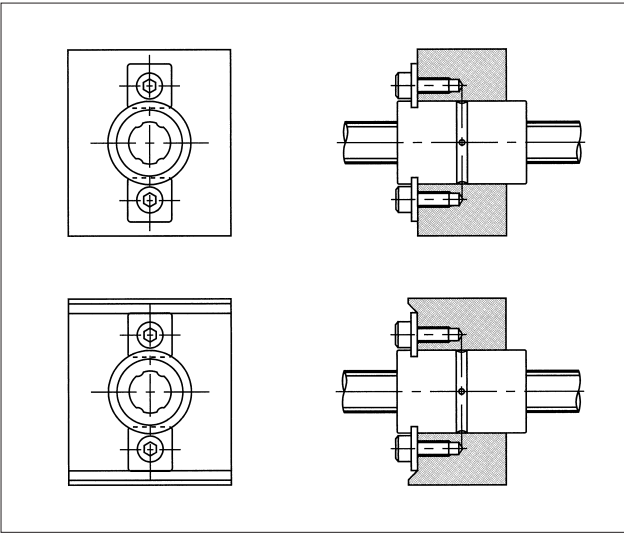


Figure B-12 Using an LP Type Lock Plate

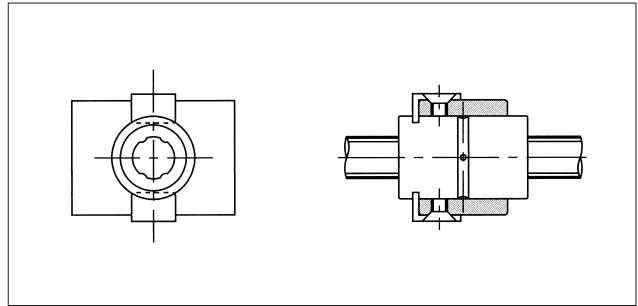


Figure B-13 Using a Special Lock Plate (1)


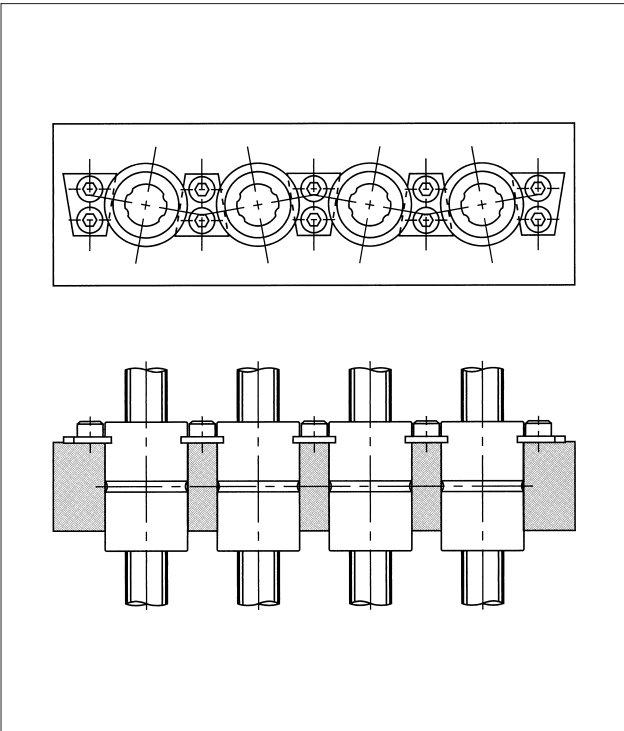


Figure B-14 Using a Special Lock Plate (2)

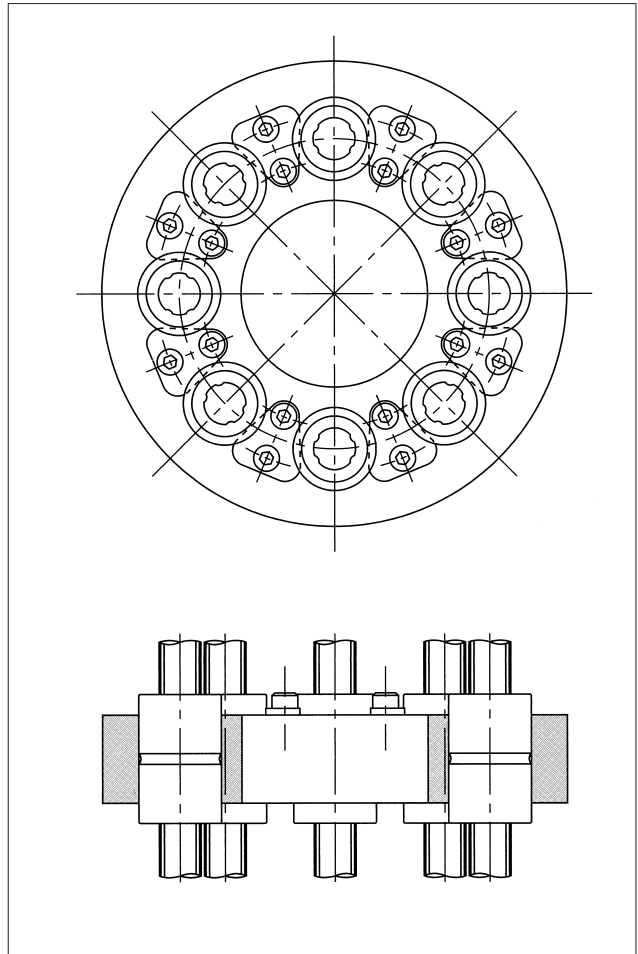

F Type Lock Plate (Standard Part):


The lock plate shown in Figure B-15 is provided with the SSPM spline.

Material: SUS304CSP

Figure B-15 F Type Lock Plate

Table B-13 F Type Lock Plate

part number	K mm	G mm	t mm	R mm	applicable spline nut
FP 6	6.8	2.9	1.0	0.5	SSPM 6
FP 8	8.5	3.5	1.2	0.5	SSPM 8
FP10	8.5	3.5	1.2	0.5	SSPM10

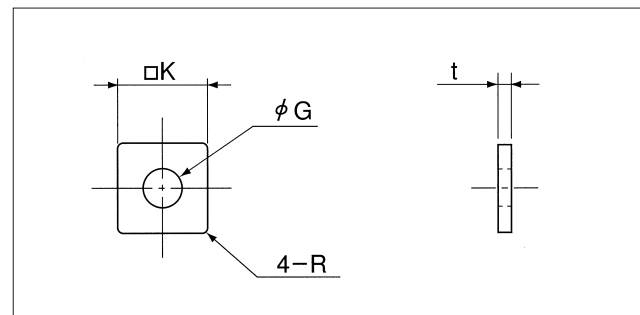


LP Type Lock Plate (Purchased Separately):

An LP type lock plate is also available for use with the SSPM spline.

Material: SUS304CSP

Figure B-16 LP Type Lock Plate

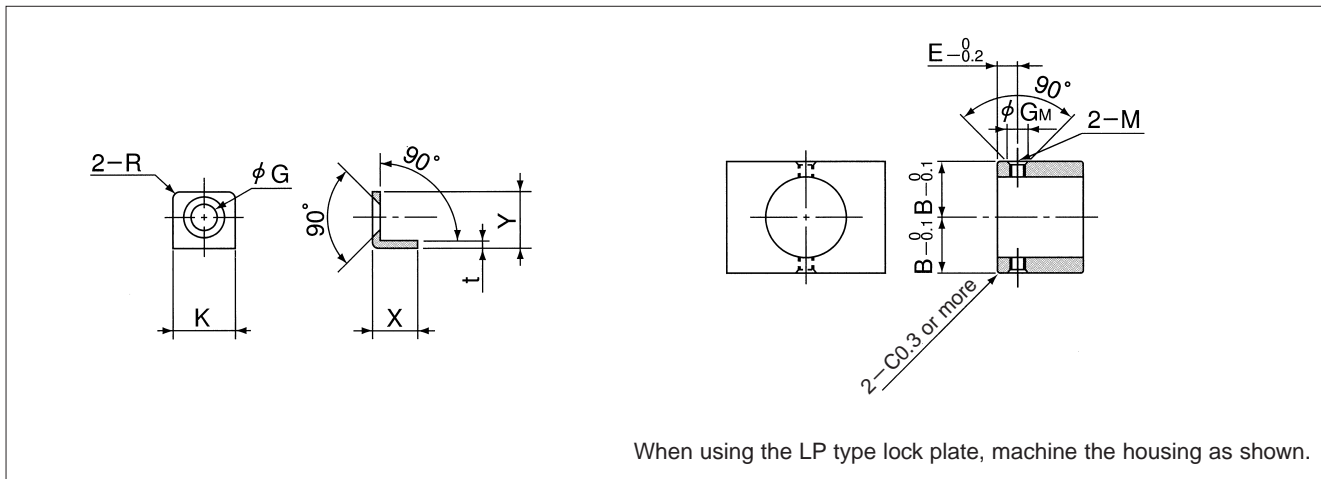

When using the LP type lock plate, machine the housing as shown.


Table B-14 LP Type Lock Plate

part number	lock plate major dimensions						machined housing dimensions				applicable spline nut
	K mm	G mm	t mm	R mm	X mm	Y mm	B mm	E mm	G _M mm	M	
LP 6	8.6	3.6	1.0	1	5.85	7.8	11.1	3.3	3.5	M2.5	SSPM 6
LP 8	9.15	4.3	1.2	1	6.45	9.2	12.3	4.0	4.2	M3	SSPM 8
LP10	9.15	4.3	1.2	1	6.45	9.2	14.8	4.0	4.2	M3	SSPM10

Mounting of SSPF Type Spline:

Example methods for installing the SSPF spline are shown in Figure B-17.


Figure B-17 Example Methods for installing SSPF Type Spline

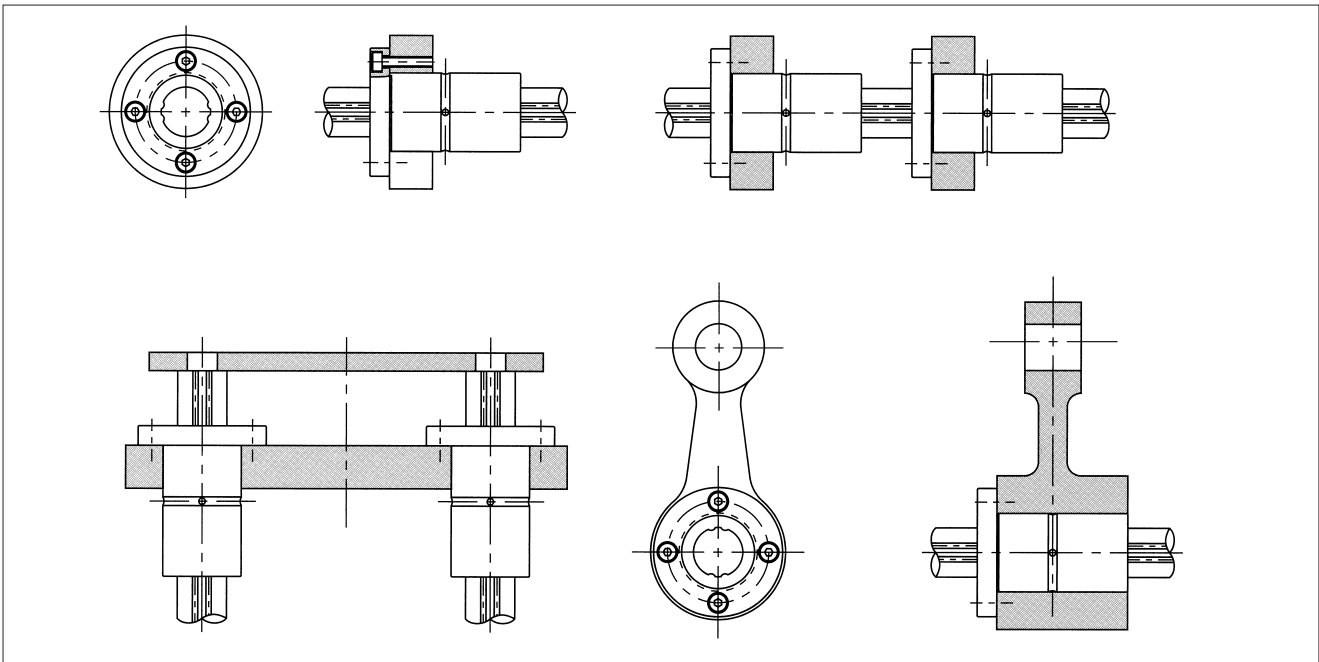

Mounting of SSPT Spline:

Example methods for installing the SSPT spline are shown in Figure B-18.


Figure B-18 Example Methods for installing SSPT Type Spline

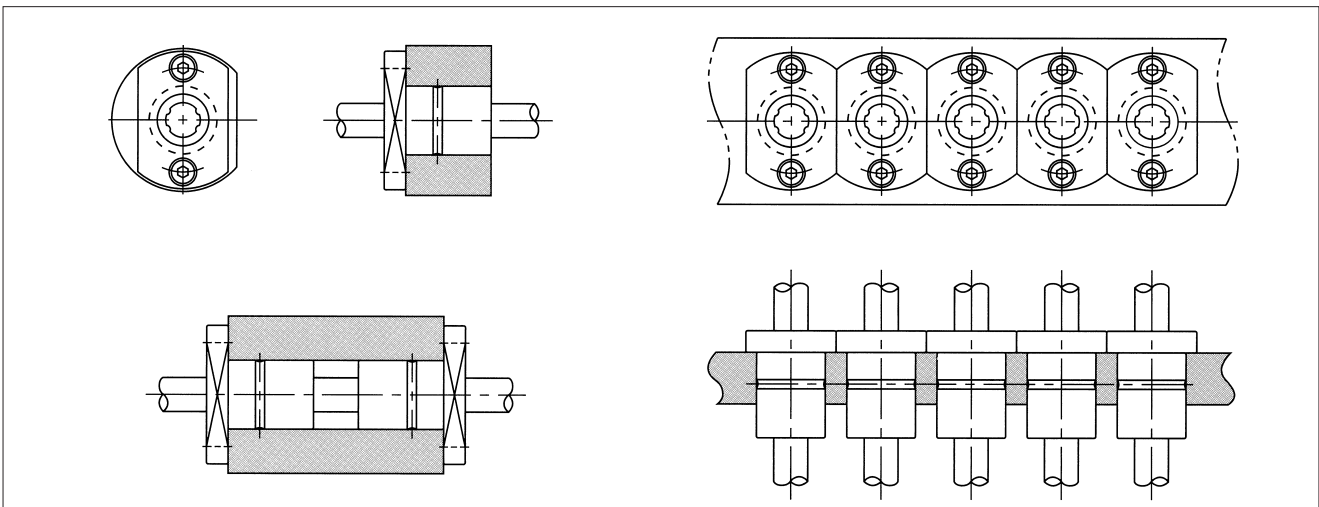

Mounting of Block Type Spline:




Example methods for installing the block spline are shown in Figure B-19.

Figure B-19 Example Methods for installing Block Type Spline

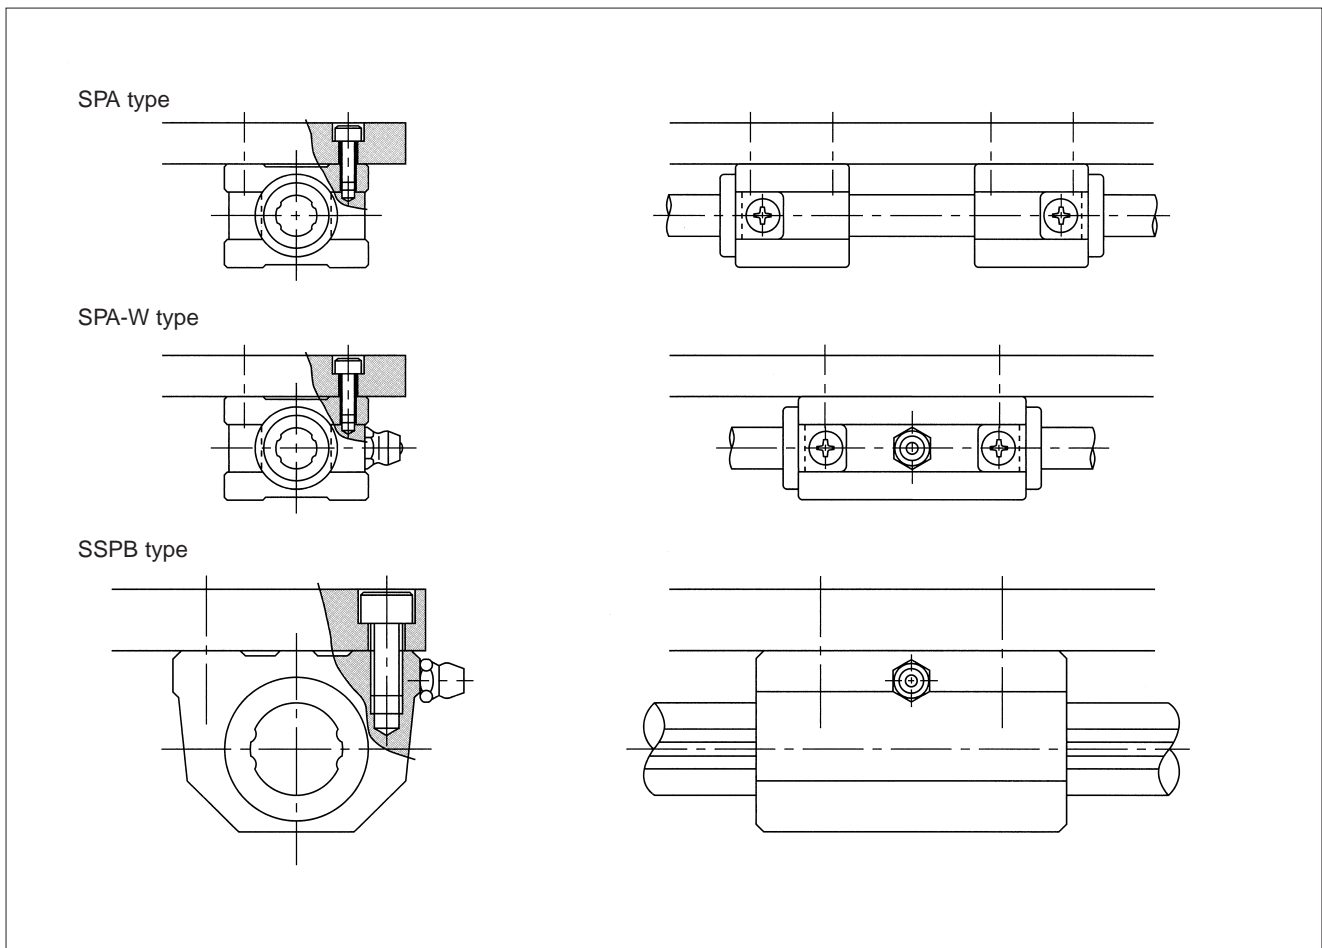


SSP TYPE

– Cylindrical Spline Nut –

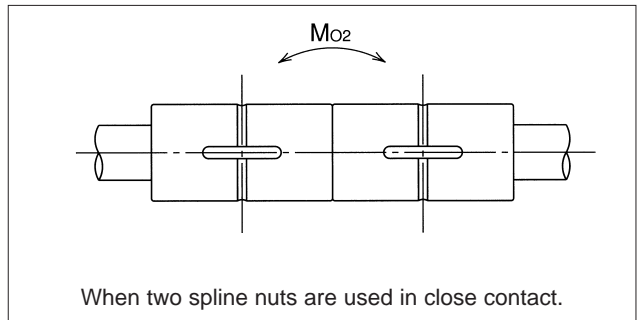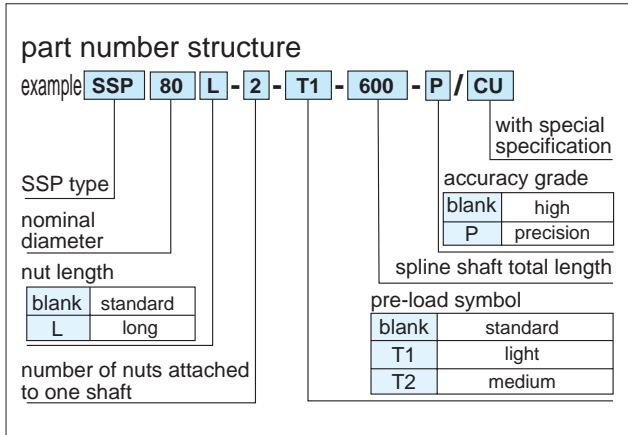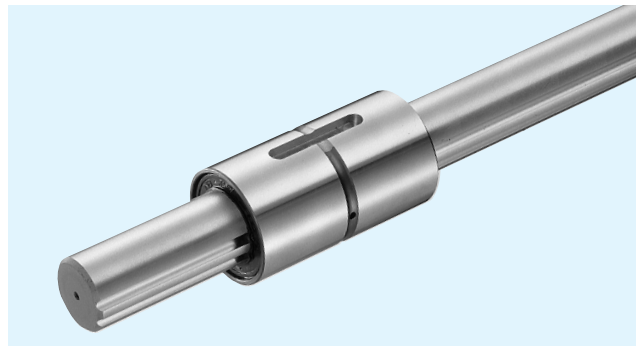

part number		major dimensions											
		D		L		B	b		t +0.05 0 mm	L ₁	d	Ds	
standard	anticorrosion	mm	tolerance μm	mm	tolerance mm		mm	mm				μm	mm
SSP 4	SSPS 4	10	0/-9	16	0	-	2	+14 0	1.2	6	-	4	0
SSP 6	SSPS 6	14	0	25			2.5		1.2	10.5	1	6	-12
SSP 8	SSPS 8	16	-11	25			2.5		1.2	10.5	1.5	8	0
SSP 10	SSPS 10	21	0	33			3		1.5	13	1.5	10	-15
SSP 13A	SSPS 13A	24	-13	36			3		1.5	15	1.5	13	0
SSP 16A	SSPS 16A	31	0	50	-0.2	-	3.5	+18 0	2	17.5	2	16	-18
SSP 20A	SSPS 20A	35		63			4		2.5	29	2	20	0 -21
SSP 20	SSPS 20	32		60			4		2.5	26	2	18.2	
SSP 25A	SSPS 25A	42		71			4		2.5	36	3	25	
SSP 25	SSPS 25	37		70			5		3	33	3	23	
SSP 30	-	45	0	80	-0.3	-	7	+22 0	4	41	3	28	
SSP 40	-	60		100			10		4.5	55	4	37.4	
SSP 50	-	75		112			15		5	60	4	47	
SSP 60	-	90		127			18		6	68	4	56.5	
SSP 80	-	120		160			118.2		0	-	16	6	76
SSP 80L	-		217	175.2	110								
SSP100	-	150	185	132.6	+33 0	-	20	7	110	5	100	0 -35	
SSP100L	-		248	195.6					160				

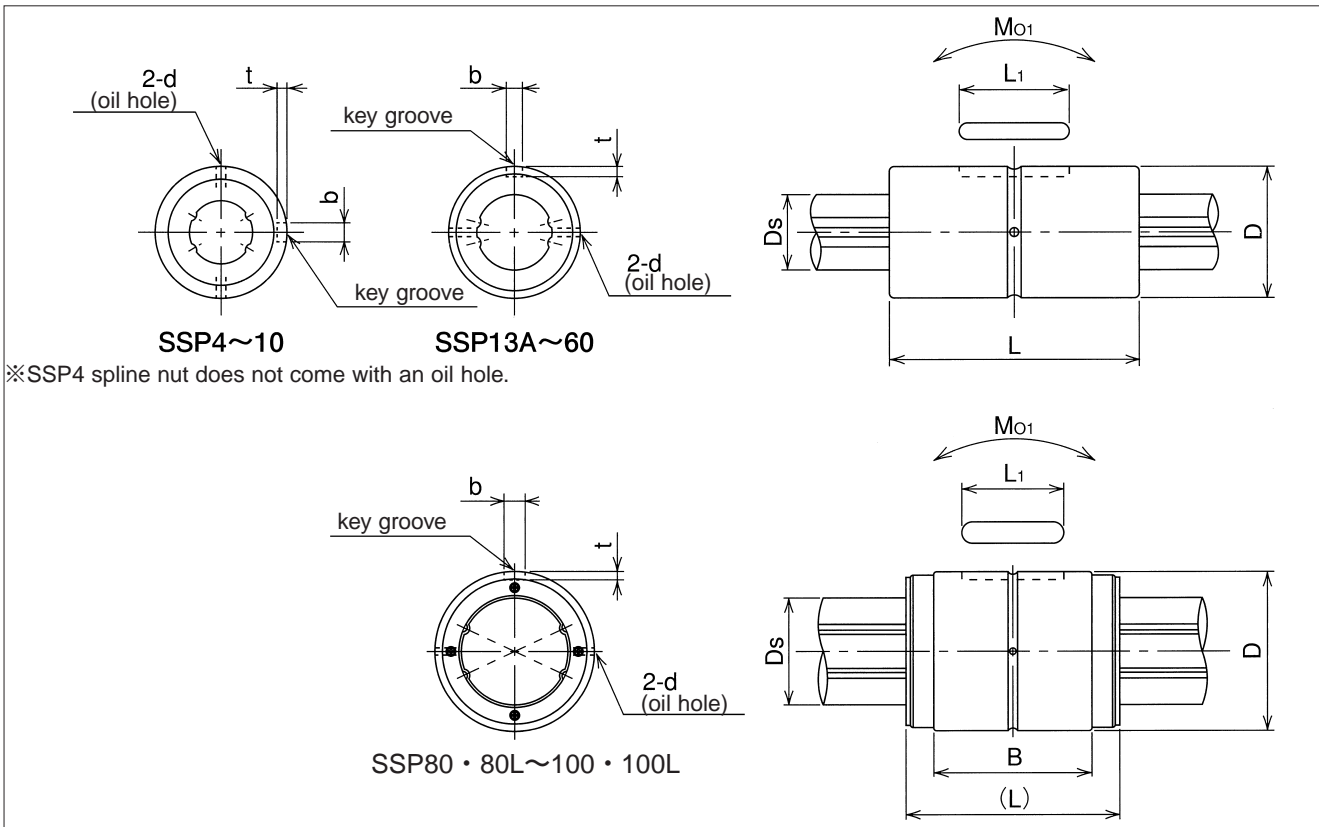




※SSP4 spline nut does not come with an oil hole.

basic torque rating		basic load rating		allowable static moment		second cross-sectional moment of inertia	cross-sectional coefficient	mass		part number
dynamic C _T N · m	static C _{0T} N · m	dynamic C kN	static C ₀ kN	M ₀₁ N · m	M ₀₂ N · m			nut kg	shaft kg/m	
0.74	1.05	0.86	1.22	1.97	10.3	1.18 × 10	5.90	0.0065	0.10	SSP 4
1.5	2.4	1.22	2.28	5.1	40	5.9 × 10	1.97 × 10	0.019	0.21	SSP 6
2.1	3.7	1.45	2.87	7.4	50	1.9 × 10 ²	4.76 × 10	0.023	0.38	SSP 8
4.4	8.2	2.73	5.07	18.0	116	4.61 × 10 ²	9.22 × 10	0.054	0.60	SSP 10
21	39.2	2.67	4.89	13.7	109	1.38 × 10 ³	2.13 × 10 ²	0.07	1.0	SSP 13A
60	110	6.12	11.2	46	299	2.98 × 10 ³	3.73 × 10 ²	0.15	1.5	SSP 16A
105	194	8.9	16.3	110	560	7.35 × 10 ³	7.34 × 10 ²	0.22	2.4	SSP 20A
83	133	7.84	11.3	63	500	5.05 × 10 ³	5.54 × 10 ²	0.20	2.0	SSP 20
189	346	12.8	23.4	171	1,029	1.79 × 10 ⁴	1.43 × 10 ³	0.33	3.7	SSP 25A
162	239	12.3	16.1	104	830	1.27 × 10 ⁴	1.11 × 10 ³	0.22	3.1	SSP 25
289	412	18.6	23.2	181	1,470	2.75 × 10 ⁴	1.96 × 10 ³	0.35	4.8	SSP 30
637	882	30.8	37.5	358	2,940	8.73 × 10 ⁴	4.67 × 10 ³	0.81	8.6	SSP 40
1,390	3,180	46.1	74.2	696	4,400	2.16 × 10 ⁵	9.21 × 10 ³	1.5	13.1	SSP 50
2,100	4,800	58.0	127	1,300	8,800	4.51 × 10 ⁵	1.60 × 10 ⁴	2.5	19	SSP 60
3,860	6,230	83.1	134	2,000	11,100	1.93 × 10 ⁶	4.38 × 10 ⁵	5.1	39	SSP 80
5,120	9,340	110	201	4,410	21,100			7.6		SSP 80L
6,750	11,570	135	199	3,360	19,300	4.69 × 10 ⁶	9.38 × 10 ⁵	9.7	61	SSP100
8,960	17,300	179	298	7,340	37,700			13.9		SSP100L


1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m

SSPM TYPE

– Keyless Spline Nut –

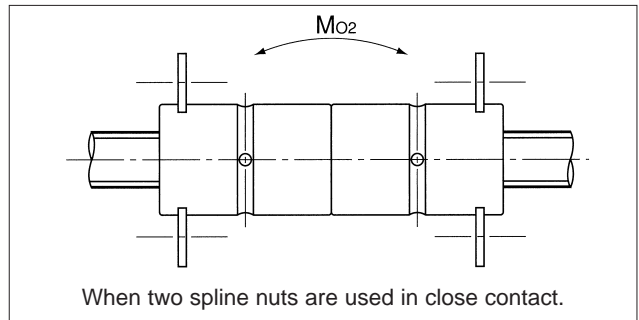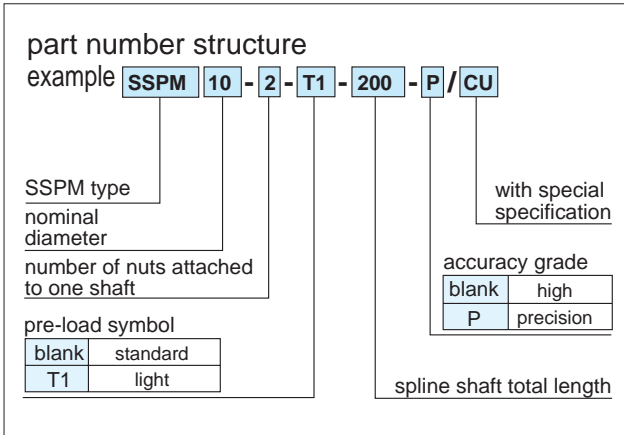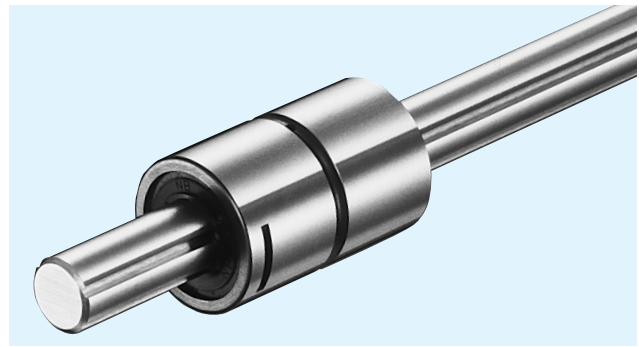

part number	major dimensions												
	D		L		F	W	C	A	d	B	H	K	G
	mm	tolerance μm	mm	tolerance mm									
SSPM 6	14	0	25	0	2.2	1.1	1.0	12.0	1	9.4	25.6	6.8	2.9
SSPM 8	16	-11	25	-0.2	2.7	1.3	1.2	13.6	1.5	11	30.6	8.5	3.5
SSPM10	21	0/-13	33	-0.2	2.7	1.3	1.2	18.6	1.5	13.5	35.6	8.5	3.5



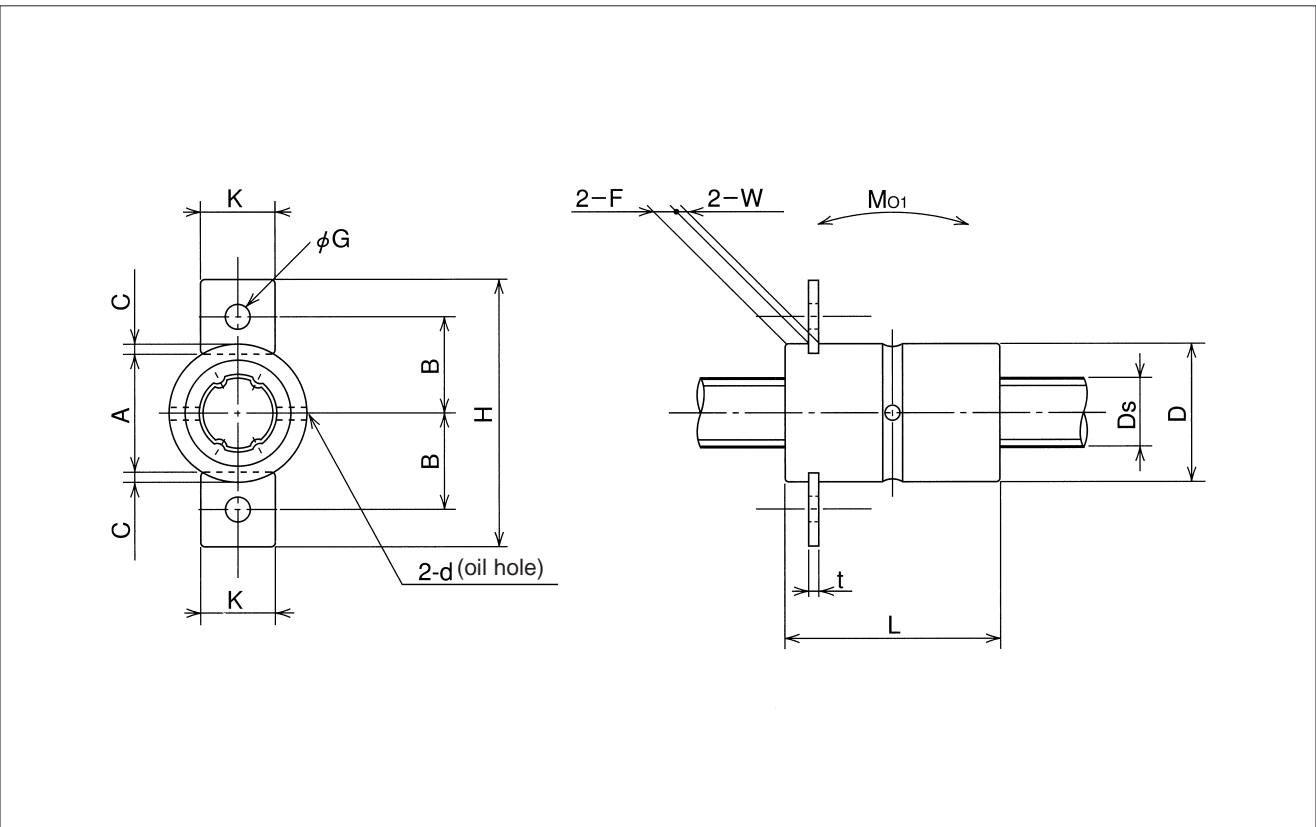


t	Ds	tolerance μm	basic torque rating		basic load rating		allowable static moment		second cross-sectional moment of inertia mm^4	cross-sectional coefficient mm^3	mass		part number
			dynamic	static	dynamic	static	M_{01}	M_{02}			nut	shaft	
			C_T	C_{0T}	C	C_0							
1.0	6	0/-12	1.5	2.4	1.22	2.28	5.1	40	5.9×10	1.97×10	0.019	0.21	SSPM 6
1.2	8	0	2.1	3.7	1.45	2.87	7.4	50	1.9×10^2	4.76×10	0.023	0.38	SSPM 8
1.2	10	-15	4.4	8.2	2.73	5.07	18.0	116	4.61×10^2	9.22×10	0.054	0.60	SSPM10


1kN \approx 102kgf 1N \cdot m \approx 0.102kgf \cdot m

SSPF TYPE

– Flange Type Nut –

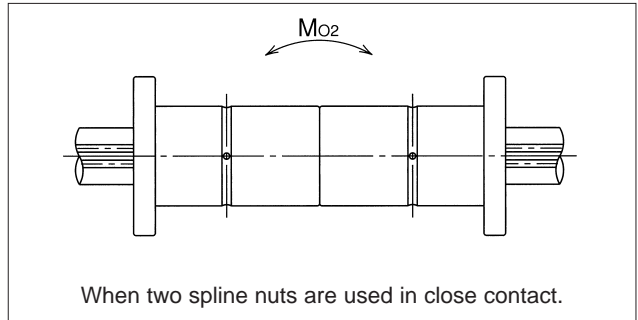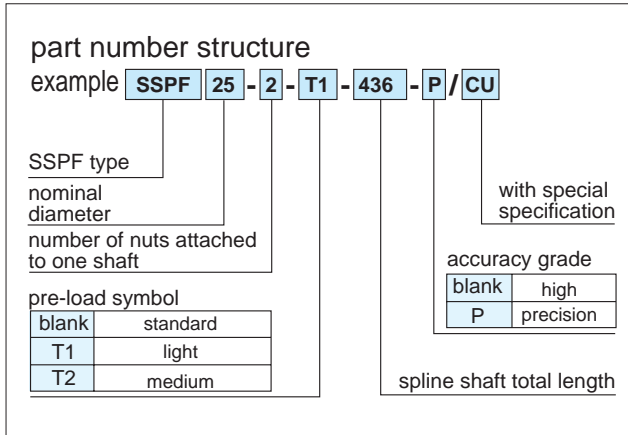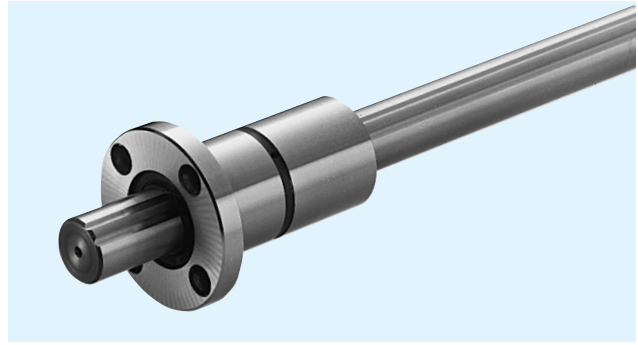

part number		major dimensions									
		D mm	tolerance μm	L		Df mm	H mm	P.C.D. mm	d ₁ × d ₂ × h mm	W mm	d mm
mm	tolerance mm										
standard	anticorrosion										
SSPF 6	SSPFS 6	14	0	25	0 -0.2	30	5	22	3.4 × 6.5 × 3.3	7.5	1
SSPF 8	SSPFS 8	16	-11	25		32	5	24	3.4 × 6.5 × 3.3	7.5	1.5
SSPF10	SSPFS10	21	0	33		42	6	32	4.5 × 8 × 4.4	10.5	1.5
SSPF13A	SSPFS13A	24	-13	36		43	7	33	4.5 × 8 × 4.4	11	1.5
SSPF16A	SSPFS16A	31	0 -16	50		50	7	40	4.5 × 8 × 4.4	18	2
SSPF20A	SSPFS20A	35		63		58	9	45	5.5 × 9.5 × 5.4	22.5	2
SSPF20	SSPFS20	32		60	51	7	40	4.5 × 8 × 4.4	23	2	
SSPF25A	SSPFS25A	42		71	65	9	52	5.5 × 9.5 × 5.4	26.5	3	
SSPF25	SSPFS25	37		70	60	9	47	5.5 × 9.5 × 5.4	26	3	
SSPF30	—	45		80	70	10	54	6.6 × 11 × 6.5	30	3	
SSPF40	—	60	0	100	0 -0.3	90	14	72	9 × 14 × 8.6	36	4
SSPF50	—	75	-19	112		113	16	91	11 × 17.5 × 11	40	4
SSPF60	—	90	0/-22	127		129	18	107	11 × 17.5 × 11	45.5	4



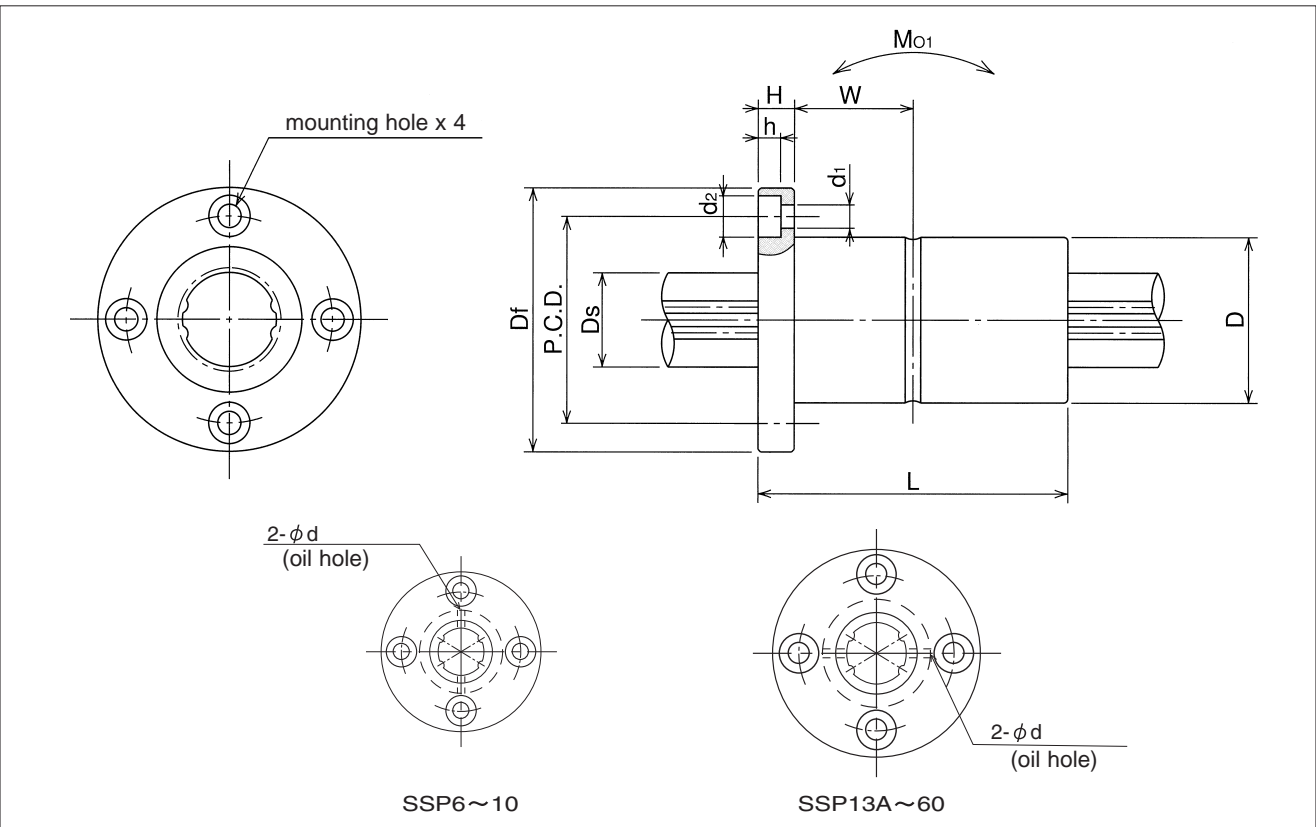


D _s mm	tolerance μm	basic torque rating		basic load rating		allowable static moment		second cross-sectional moment of inertia mm ⁴	cross-sectional coefficient mm ³	mass		part number
		dynamic	static	dynamic	static	M ₀₁ N·m	M ₀₂ N·m			nut kg	shaft kg/m	
		C _T N·m	C _{0T} N·m	C kN	C ₀ kN							
6	0/-12	1.5	2.4	1.22	2.28	5.1	40	5.9 × 10	1.97 × 10	0.037	0.21	SSPF 6
8	0	2.1	3.7	1.45	2.87	7.4	50	1.9 × 10 ²	4.76 × 10	0.042	0.38	SSPF 8
10	-15	4.4	8.2	2.73	5.07	18.0	116	4.61 × 10 ²	9.22 × 10	0.094	0.6	SSPF10
13	0	21	39.2	2.67	4.89	13.7	109	1.38 × 10 ³	2.13 × 10 ²	0.1	1	SSPF13A
16	-18	60	110	6.12	11.2	46	299	2.98 × 10 ³	3.73 × 10 ²	0.2	1.5	SSPF16A
20	0 -21	105	194	8.9	16.3	110	560	7.35 × 10 ³	7.34 × 10 ²	0.33	2.4	SSPF20A
18.2		83	133	7.84	11.3	63	500	5.05 × 10 ³	5.54 × 10 ²	0.22	2	SSPF20
25		189	346	12.8	23.4	171	1,029	1.79 × 10 ⁴	1.43 × 10 ³	0.45	3.7	SSPF25A
23		162	239	12.3	16.1	104	830	1.27 × 10 ⁴	1.11 × 10 ³	0.32	3.1	SSPF25
28		289	412	18.6	23.2	181	1,470	2.75 × 10 ⁴	1.96 × 10 ³	0.51	4.8	SSPF30
37.4	0	637	882	30.8	37.5	358	2,940	8.73 × 10 ⁴	4.67 × 10 ³	1.15	8.6	SSPF40
47	-25	1,390	3,180	46.1	74.2	696	4,400	2.16 × 10 ⁵	9.21 × 10 ³	2.1	13.1	SSPF50
56.5	0/-30	2,100	4,800	58.0	127	1,300	8,800	4.51 × 10 ⁵	1.60 × 10 ⁴	3.3	19	SSPF60


1kN ≒ 102kgf 1N·m ≒ 0.102kgf·m

SSPT TYPE

– Two Side Cut Flange Type –

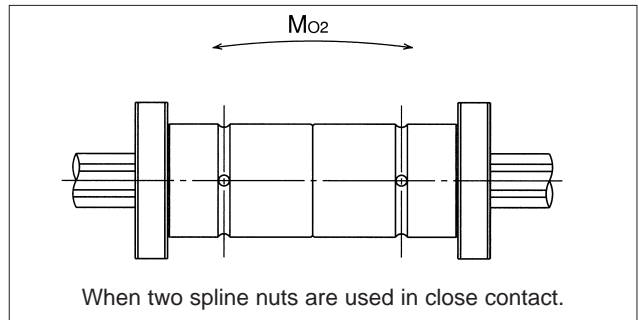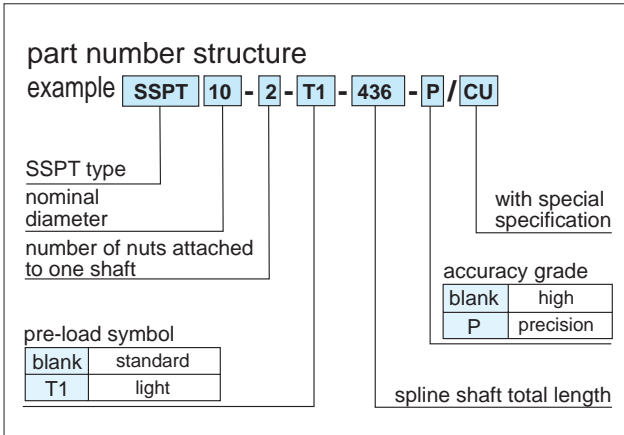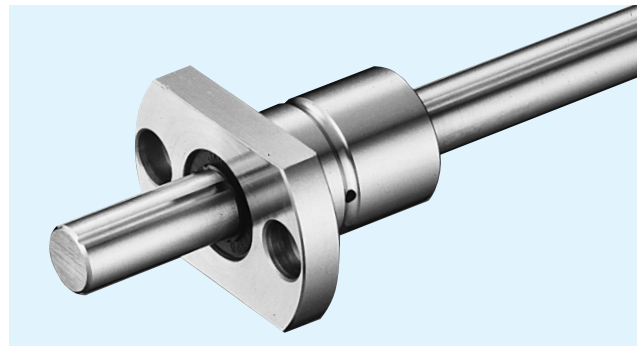

part number	major dimensions										
	D		L		Df	B	H	P.C.D.	d ₁ × d ₂ × h	W	d
	mm	tolerance μm	mm	tolerance mm							
SSPT 6	14	0	25	0 -0.2	30	18	5	22	3.4 × 6.5 × 3.3	7.5	1
SSPT 8	16	-11	25		32	21	5	24	3.4 × 6.5 × 3.3	7.5	1.5
SSPT10	21	0/-13	33		42	25	6	32	4.5 × 8 × 4.4	10.5	1.5



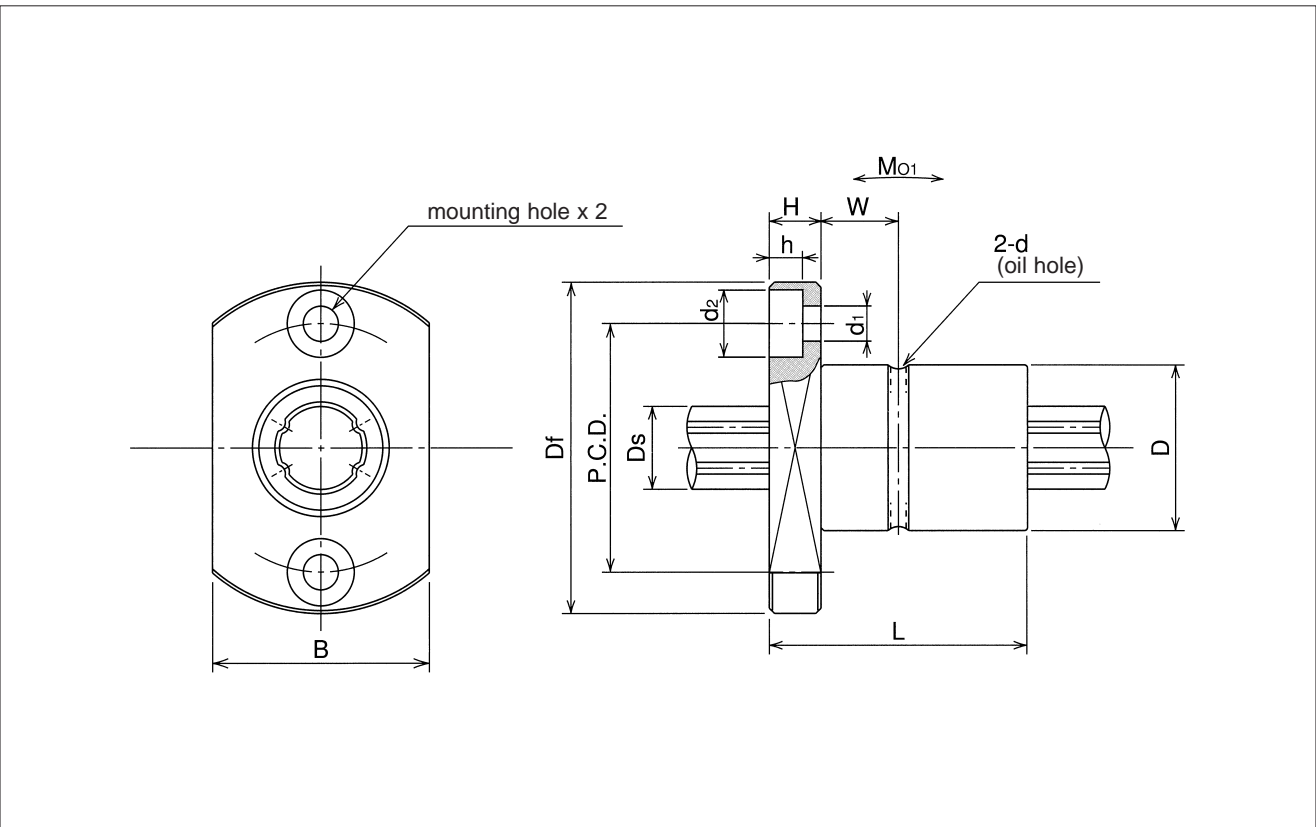


mm	D_s tolerance μm	basic torque rating		basic load rating		allowable static moment		second cross-sectional moment of inertia mm^4	cross-sectional coefficient mm^3	mass		part number
		dynamic	static	dynamic	static	M_{01} $N \cdot m$	M_{02} $N \cdot m$			nut kg	shaft kg/m	
		C_T $N \cdot m$	C_{0T} $N \cdot m$	C kN	C_o kN							
6	0/-12	1.5	2.4	1.22	2.28	5.1	40	5.9×10	1.97×10	0.029	0.21	SSPT 6
8	0	2.1	3.7	1.45	2.87	7.4	50	1.9×10^2	4.76×10	0.035	0.38	SSPT 8
10	-15	4.4	8.2	2.73	5.07	18.0	116	4.61×10^2	9.22×10	0.075	0.6	SSPT10


1kN \approx 102kgf 1N \cdot m \approx 0.102kgf \cdot m

SPA TYPE

– Keyless Block Type –

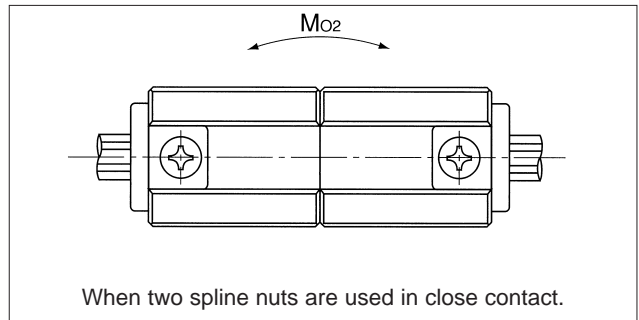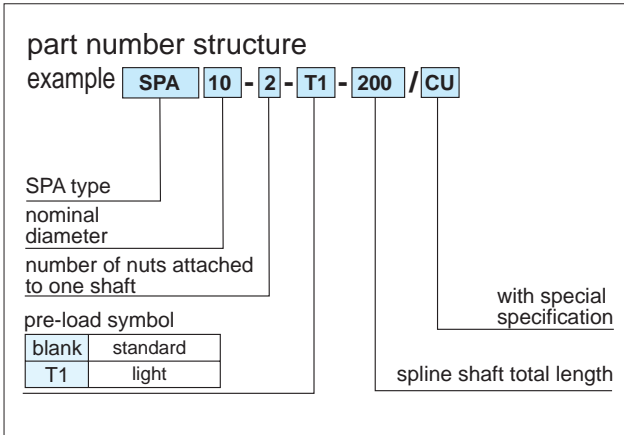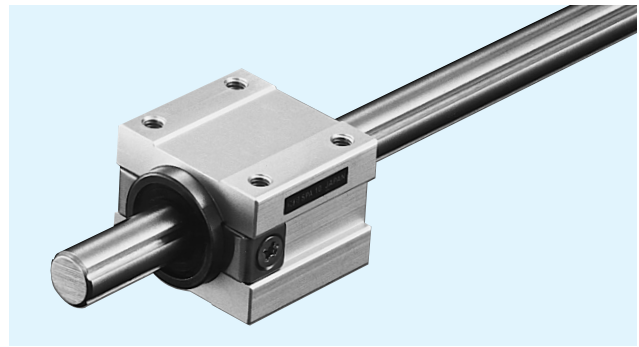

part number	major dimensions											
	h	E	W	L	F	L ₁	T	B	C	S	ℓ	D
	mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	mm
SPA 6	9	12.5	25	25	18	22.5	4.2	18	16	M3	5	14
SPA 8	10	14	28	25	20	22	5	20	16	M3	5	16
SPA10	12.5	16.5	33	33	25	30	7.5	25	20	M4	6	21


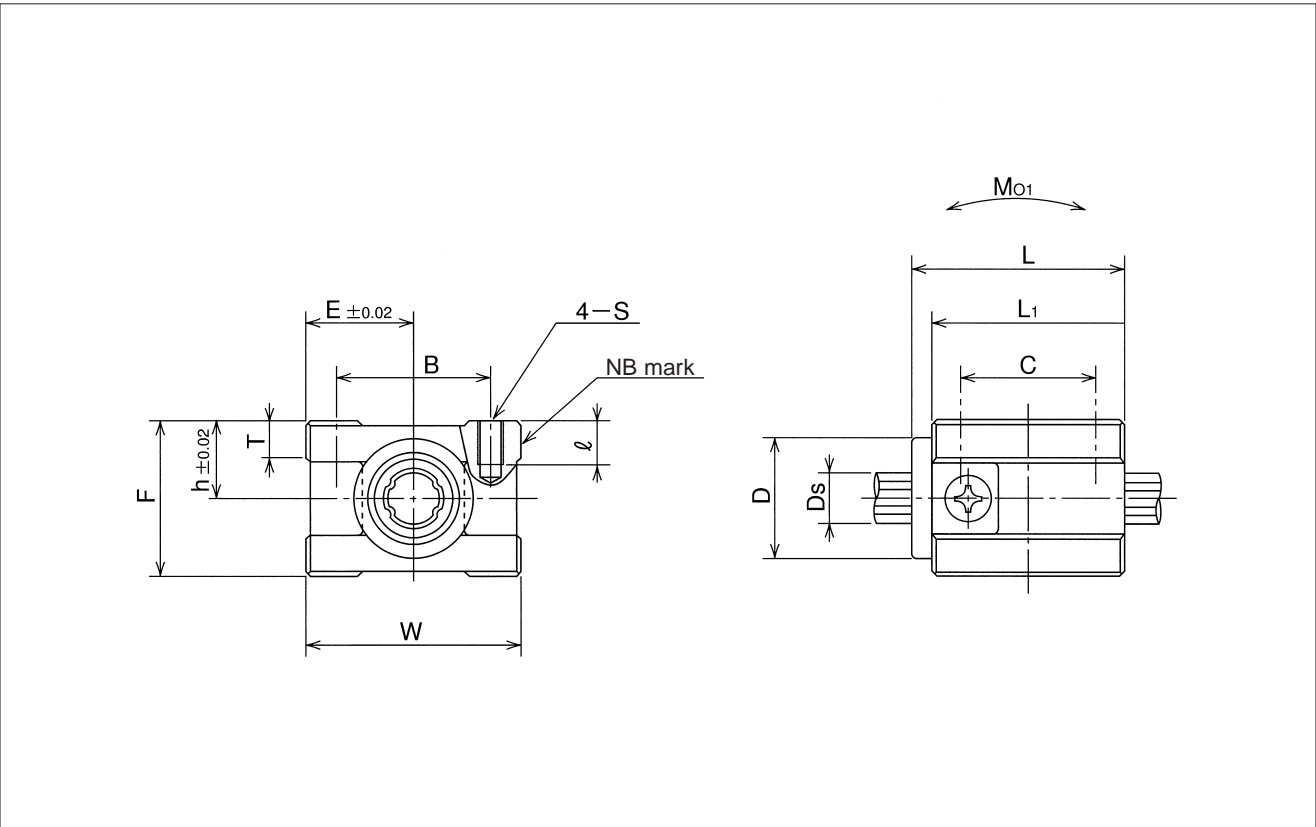


Ds		basic torque rating		basic load rating		allowable static moment		second cross-sectional moment of inertia	cross-sectional coefficient	mass		part number
		dynamic	static	dynamic	static	M ₀₁	M ₀₂			nut	shaft	
mm	tolerance μm	N · m	N · m	kN	kN	N · m	N · m	mm ⁴	mm ³			
6	0/-12	1.5	2.4	1.22	2.28	5.1	40	5.9 × 10	1.97 × 10	0.035	0.21	SPA 6
8	0	2.1	3.7	1.45	2.87	7.4	50	1.9 × 10 ²	4.76 × 10	0.042	0.38	SPA 8
10	-15	4.4	8.2	2.73	5.07	18	116	4.61 × 10 ²	9.22 × 10	0.088	0.6	SPA10


1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m

SPA-W TYPE

— Keyless Block Double Type —

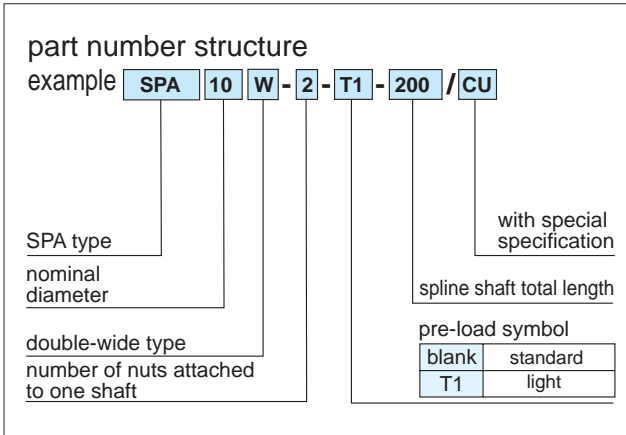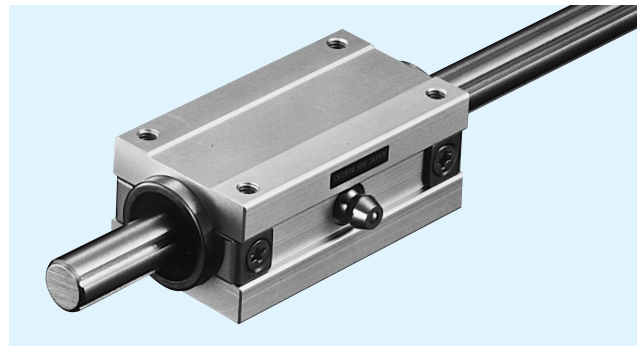

part number	major dimensions											
	h	E	W	L	F	L ₁	T	Gw	B	C	S	ℓ
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
SPA 6W	9	12.5	25	50	18	45	4.2	6.5	18	35	M3	5
SPA 8W	10	14	28	50	20	44	5		20	34	M3	5
SPA10W	12.5	16.5	33	66	25	60	7.5		25	50	M4	6



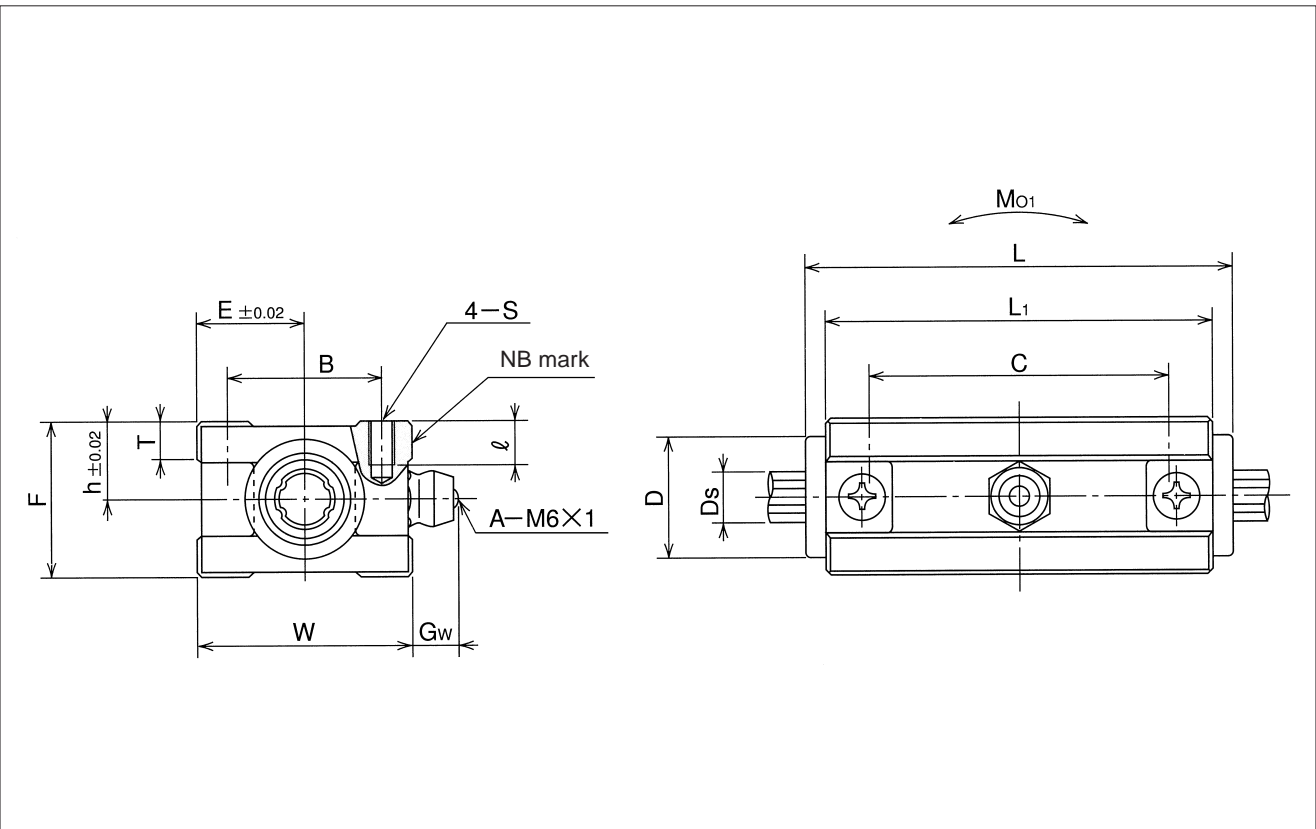


D mm	Ds		basic torque rating		basic load rating		allowable static moment Mo1 N · m	second cross- sectional moment of inertia mm ⁴	cross- sectional coefficient mm ³	mass		part number
	mm	tolerance	dynamic	static	dynamic	static				nut	shaft	
		μm	C _T N · m	C _{0T} N · m	C kN	C ₀ kN						
14	6	0/-12	3.0	4.8	1.98	4.56	40	5.9 × 10	1.97 × 10	0.072	0.21	SPA 6W
16	8	0	4.2	7.4	2.35	5.78	50	1.9 × 10 ²	4.76 × 10	0.085	0.38	SPA 8W
21	10	-15	8.8	16.4	4.42	10.14	116	4.61 × 10 ²	9.22 × 10	0.179	0.60	SPA10W


1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m

SSPB TYPE

– Block Type –

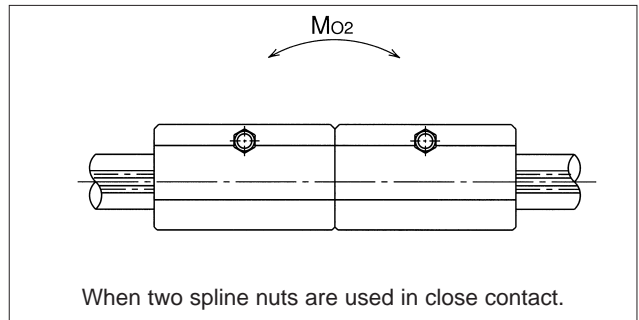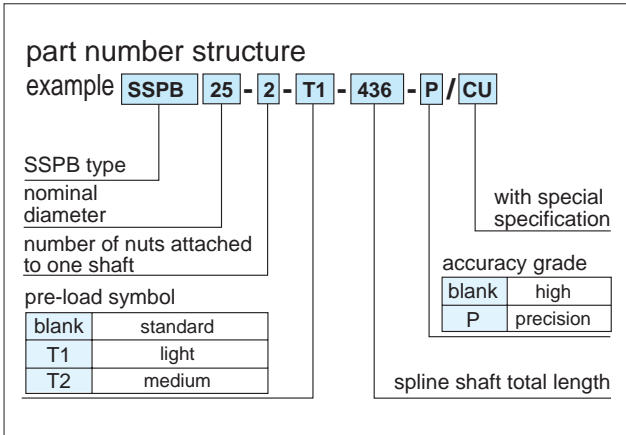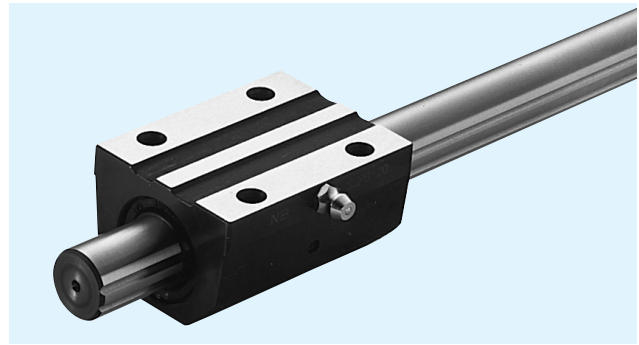


part number	major dimensions										
	h	B	L	E	b	T	P ₁	P ₂	S	ℓ	T ₁
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
SSPB20	19	48	60	24	35	8	35	35	M6	12	5.5
SSPB25	22	60	70	30	41.5	10	40	40	M8	12	6
SSPB30	26	70	80	35	50	12	50	50	M8	12	7
SSPB40	32	86	100	43	63	15	60	60	M10	15	8

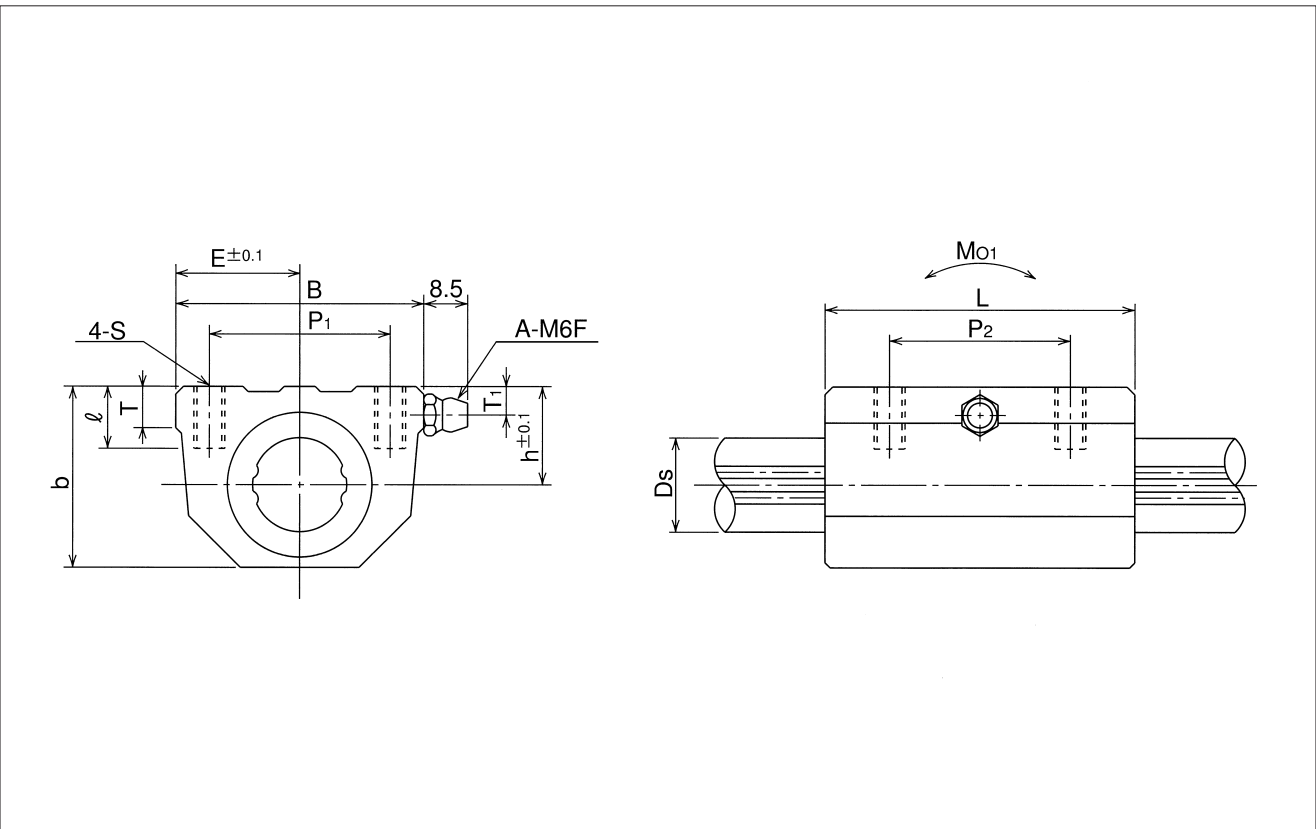

Ds		basic torque rating		basic load rating		allowable static moment		second cross-sectional moment of inertia	cross-sectional coefficient	mass		part number
		dynamic	static	dynamic	static	M ₀₁	M ₀₂			nut	shaft	
		C _T	C _{0T}	C	C ₀							
mm	tolerance μm	N·m	N·m	kN	kN	N·m	N·m	mm ⁴	mm ³			
18.2	0 -21	83	133	7.84	11.3	63	500	5.05 × 10 ³	5.54 × 10 ²	0.55	2.0	SSPB20
23		162	239	12.3	16.1	104	830	1.27 × 10 ⁴	1.11 × 10 ³	0.9	3.1	SSPB25
28		289	412	18.6	23.2	181	1,470	2.75 × 10 ⁴	1.96 × 10 ³	1.4	4.8	SSPB30
37.4	0/-25	637	882	30.8	37.5	358	2,940	8.73 × 10 ⁴	4.67 × 10 ³	2.5	8.6	SSPB40

1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m

STANDARD BALL SPLINE

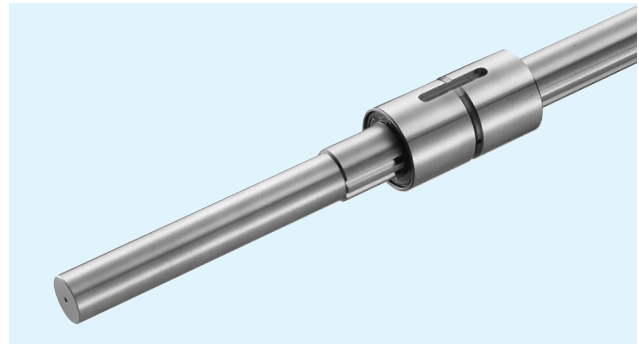

part number structure example **SPA 10 W S - 2 - T1 - 400**

nut shape

SSP	cylindrical type
SSPM	key less type
SSPF	flange type
SSPT	two side cut flange type
SPA	aluminum block type
SSPB	block type

nominal diameter

standard length L


pre-load symbol

blank	standard
T1	light
T2	medium

number of nuts attached to one shaft

standard spline shaft

double-wide type

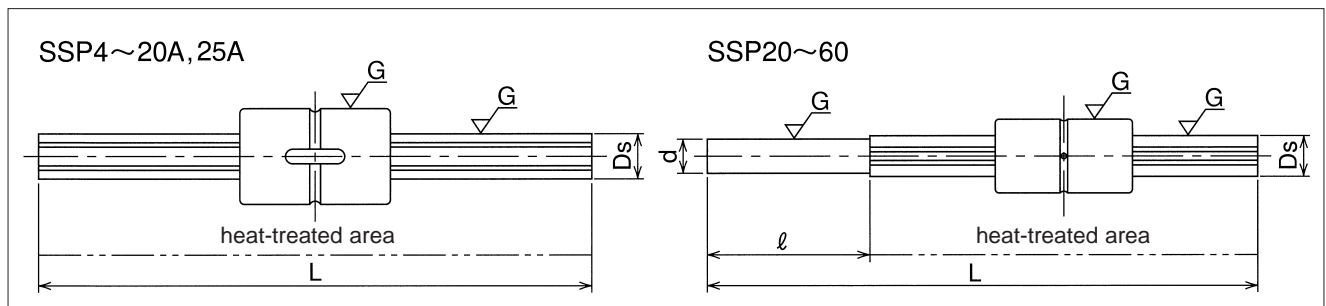




nominal diameter	major dimensions									applicable nut						
	Ds		d		ℓ	standard length L				SSP	SSPM	SSPF	SSPT	SPA	SPA-W	SSPB
	mm	tolerance μm	mm	tolerance μm		mm										
4	4	0	-	-	-	100	150	200	300	-	○	-	-	-	-	-
6	6	-12	-	-	-	150	200	300	400	-	○	○	○	○	○	-
8	8	0	-	-	-	150	200	300	400	500	○	○	○	○	○	-
10	10	-15	-	-	-	200	300	400	500	600	○	○	○	○	○	-
13A	13	0	-	-	-	200	300	400	500	600	○	-	○	-	-	-
16A	16	-18	-	-	-	200	300	400	500	600	○	-	○	-	-	-
20A	20	0	-	-	-	300	400	500	800	1,000	○	-	○	-	-	-
20	18.2		15	0/-18	-	350	450	550	650	-	○	-	○	-	-	○
25A	25	-21	-	-	150	300	400	500	800	1,000	○	-	○	-	-	-
25	23		20	0	150	350	450	550	650	850	○	-	○	-	-	○
30	28	25	-21		150	450	550	650	750	1,150	○	-	○	-	-	○
40	37.4	30		150	550	750	950	1,150	-	○	-	○	-	-	○	
50	47	-25	40	0	150	650	850	1,150	1,350	-	○	-	○	-	-	
60	56.5	0/-30	45		-25	150	650	850	1,150	1,350	-	○	-	○	-	-

Tolerance of length L for nominal diameter sizes 4-16A: JIS B0405 coarse grade.

○ yes - no

Refer to dimensional tables for nut shape and dimensions.

COMMERCIAL BALL SPLINE

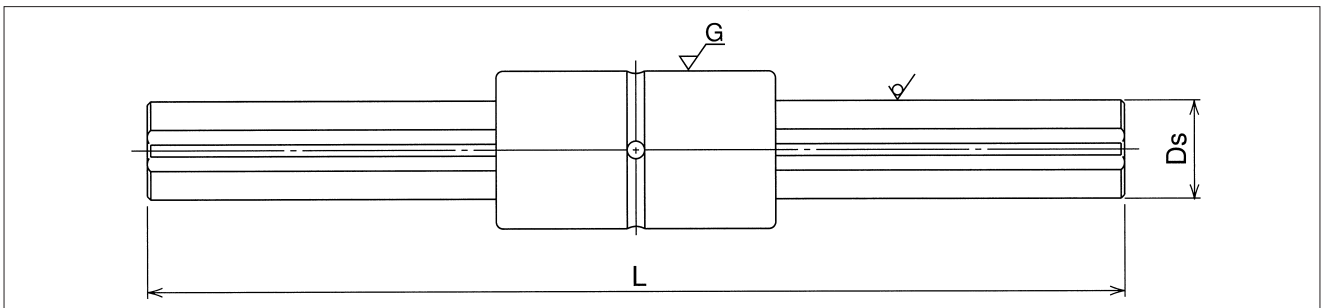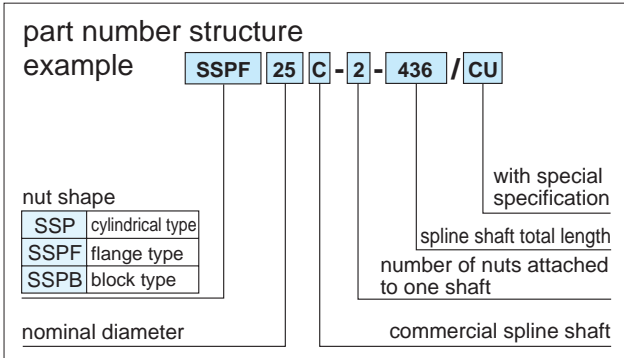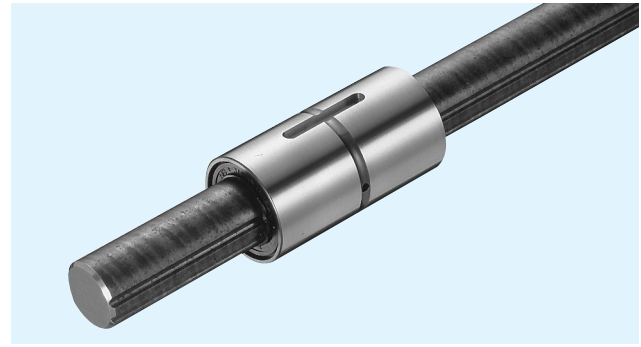

nominal diameter	major dimensions							applicable nut						
	Ds mm	standard length L mm						SSP	SSPM	SSPF	SSPT	SPA	SPA-W	SSPB
		500	1,000	2,000	3,000	4,000	5,000							
20	18.2	500	1,000	2,000	3,000	4,000	5,000	<input type="radio"/>	-	<input type="radio"/>	-	-	-	<input type="radio"/>
25	23	500	1,000	2,000	3,000	4,000	5,000	<input type="radio"/>	-	<input type="radio"/>	-	-	-	<input type="radio"/>
30	28	500	1,000	2,000	3,000	4,000	5,000	<input type="radio"/>	-	<input type="radio"/>	-	-	-	<input type="radio"/>
40	37.4	500	1,000	2,000	3,000	4,000	5,000	<input type="radio"/>	-	<input type="radio"/>	-	-	-	<input type="radio"/>
50	47	500	1,000	2,000	3,000	4,000	5,000	<input type="radio"/>	-	<input type="radio"/>	-	-	-	-

- tolerance of total length and length of splined portion yes - no
 - total length less than 4000: JIS B0405 coarse grade
 - total length greater than 4,000: +/- 5.0mm
- Please specify for tolerances other than those above.
- Refer to dimensional tables for nut shape and dimensions
- When a commercial shaft is used, the rated load for the nut is about 70% that indicated in the dimensional tables.

ROTARY BALL SPLINE

The NB rotary ball spline can be used for both rotational motion and linear motion. It can be used in SCARA robots, the vertical shaft of assembly equipment, and tool changers and loaders.

STRUCTURE AND ADVANTAGES

The NB rotary ball spline consists of a spline shaft and a nut. The nut has a spline portion and a rotating portion using cross rollers.

Reduced Number of Parts:

Because of the single-body construction consisting of the rotating portion and the spline portion, the number of parts is reduced so that the accumulated error is reduced as well.

Compact and Light:

The cross rollers are directly attached to the ball spline's external cylinder, resulting in a compact and light design.

Substantial Reduction in Installation Cost:

The use of cross roller elements keeps the housing thickness to a minimum, making the ball spline light and easy to install.


High Rigidity:

The cross roller elements and 4-row ball circuit structure provides high rigidity in spite of the compact design.

High Accuracy:

The cross roller elements ensure accurate positioning in the rotational direction.

Figure B-20 Structure of NB Rotary Ball Spline

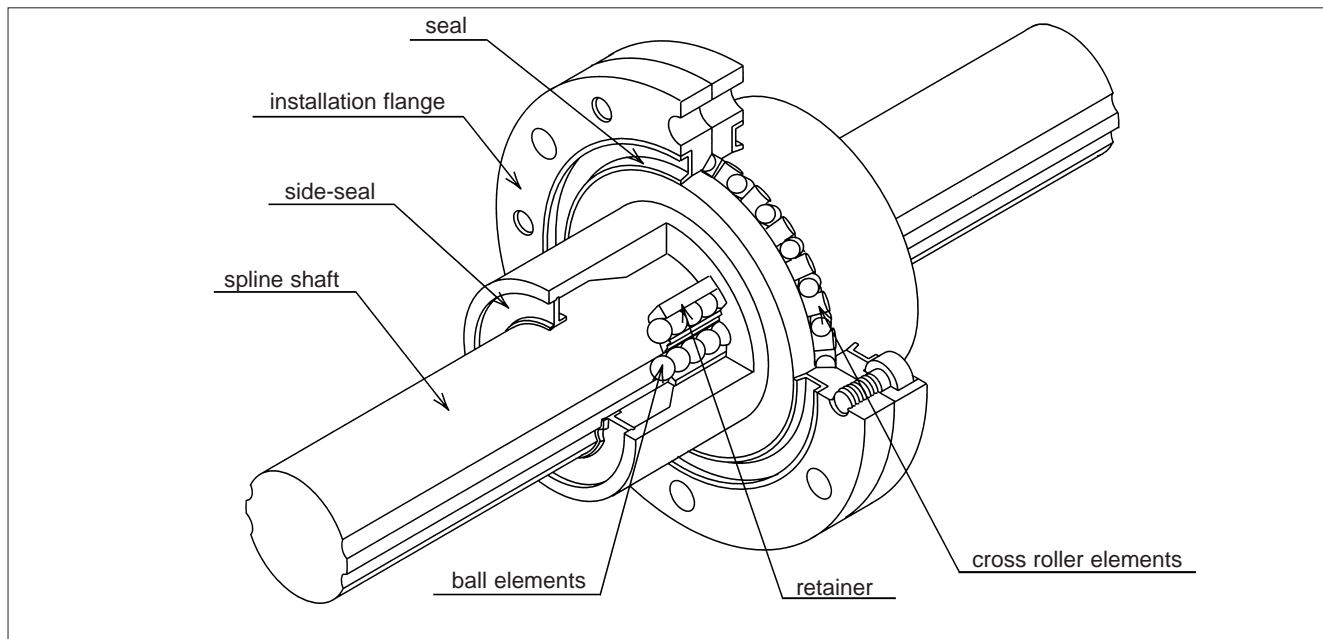

ACCURACY

The accuracy of the NB rotary ball spline is measured as shown in Figure B-21.

Figure B-21 Accuracy Measurement Points

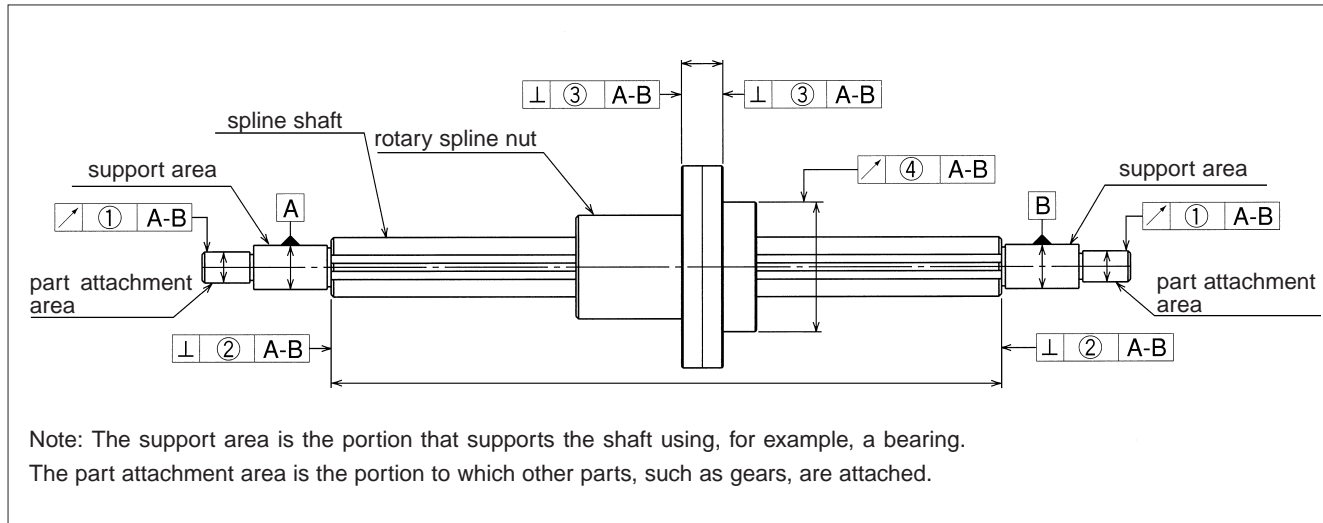


Table B-15 Tolerance of Spline Shaft Groove Torsion (Max.)

accuracy grade	high
tolerance	13 $\mu\text{m}/100\text{mm}$

The groove torsion is indicated for 100mm, arbitrarily set as the effective length of the spline section. When the motion length is under 100mm or exceeds 100mm, the value shown in Table B-15 increases or decreases proportionally to the motion length.

Table B-16 Tolerance of Parts Relative to Spline Support Area(Max.) unit/ μm

part number	①radial run out of part attachment area	②perpendicularity of the end of the spline shaft section	③perpendicularity of the flange
SPR 6	14	9	14
SPR 8			
SPR10			
SPR13	19	11	18
SPR16			
SPR20A			
SPR20			
SPR25A	22	13	21
SPR25			
SPR30			
SPR40	25	16	25
SPR50			
SPR60			
SPR60	29	19	29

Table B-17 ④Radial Run Out of Outer Surface of Rotary Spline Nut Relative to Spline Support Area (Max.)

unit/ μm

spline shaft total length		part number					
greater than	or less	SPR 6,8	SPR 10	SPR 13,16	SPR 20,20A,25,25A,30	SPR 40,50	SPR 60
	200	46	36	34	32	32	30
200	315	89	54	45	39	36	34
315	400	126	68	53	44	39	36
400	500	163*	82	62	50	43	38
500	630	—	102	75	57	47	41
630	800	—	—	92	68	54	45
800	1,000	—	—	115	83	63	51
1,000	1,250	—	—	153	102	76	59
1,250	1,600	—	—	195*	130	93	70
1,600	2,000	—	—	—	171	118	86

※Contact NB for spline shafts exceeding 2000mm.

* SPR6 spline shaft Max. length : 400mm

SPR13,16 Max.length : 1500mm

PRE-LOAD AND CLEARANCE IN ROTATIONAL DIRECTION

The amount of clearance and pre-load for the spline portion and the cross-roller portion are expressed in terms of the clearance in the rotational direction and the clearance in the radial direction, respectively. Three levels of pre-load are available: standard, light (T1), and medium (T2).

Table B-18 Pre-Load and Clearance in Rotational Direction unit/ μm

	part number	standard	light (T1)	medium (T2)
linear motion	SPR 6	-2~+1	-6~-2	-
	SPR 8			
	SPR10	-3~+1	-8~-3	-13~-8
	SPR13			
	SPR16	-4~+2	-12~-4	-20~-12
	SPR20A			
	SPR20			
	SPR25A			
	SPR25	-6~+3	-18~-6	-30~-18
	SPR30			
	SPR40			
SPR50				
SPR60				
rotational motion	SPR 6 ~ SPR60	± 5		

Table B-19 Operating Condition and Pre-Load

pre-load	symbol	operating condition
standard	blank	Minute vibration is applied. A precise motion is required. Moment is applied in a given direction.
light	T1	Light vibration is applied. Light torsional load is applied. Cyclic torque is applied.
medium	T2	Shock/vibration is applied. Over-hang load is applied. Torsional load is applied.

SPECIAL REQUIREMENTS

NB will fabricate special shaft ends, spline nuts, spline shafts, surface finish etc. to meet customer requirements. Contact NB for details.

Figure B-22 Examples of Shaft End Machining


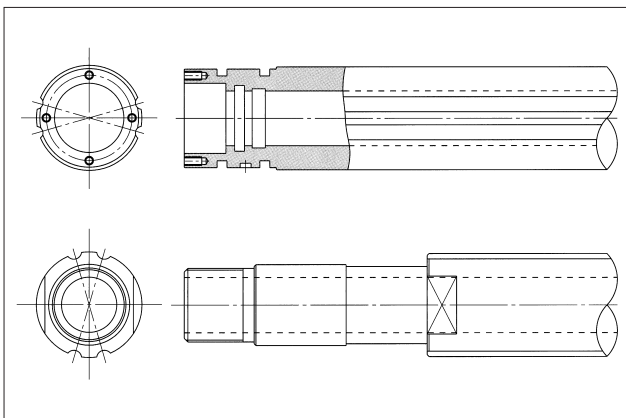


Table B-20 recommended hollow shaft

part number	outer dia. mm	inner dia. mm	modulus of section mm^3	geometrical moment of inertia mm^4
SPR 6	6	2	19.4	58
SPR 8	8	3	46.5	186
SPR10	10	4	89.6	448
SPR13	13	6	193	1,260
SPR16	16	8	348	2,780



Contact NB for other sizes.

MOUNTING OF ROTARY BALL SPLINE

The flange attachment bolts have been pre-adjusted for smooth rotary movement and should never be loosened. Shock loading to the flange assembly should be avoided as this can degrade the accuracy of movement and deteriorate the overall performance.

Mounting:

When the flange is to be used with a faucet joint (as shown in Figure B-23) the housing bore should be machined to a tolerance of H7 and to a minimum depth of 60% of the flange thickness. If only a light load is applied to the SPR in operation, the flange can be used without a pilot end.

When the mounting bolts are fixed, they should be tightened diagonally in steps with progressively more torque at each step. A torque wrench should be used to achieve uniform torque. The recommended torque values for medium-hardness steel bolts are listed in Table B-21.

Insertion of Spline Shaft:

When inserting the rotary ball spline shaft into the spline nut, ensure that the ball elements do not drop out. This is accomplished by aligning the raceway grooves of the shaft with the rows of ball elements in the nut. Then simply insert the spline shaft through the spline nut.

LUBRICATION

Since NB rotary ball splines are equipped with seals at both the spline portion and the rotational portion, the lubricant is retained for an extended period of time. Lithium soap grease is applied prior to shipment, so they can be used immediately without having to apply lubricant. Lubricant should be added periodically and depending on the operating conditions.

NB also provides low dust generation grease for the linear system. Please refer to page Eng-20 for details. A grease fitting can be installed as an optional feature however, an oil lubricant should be used for high-

Figure B-23 Flange mounting Method

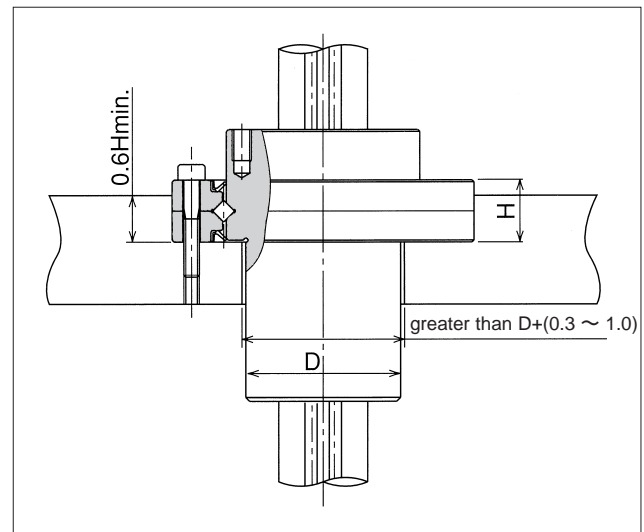


Table B-21 Recommended Torque


unit/N · m

installation bolt	M2	M2.5	M3	M4	M6	M8
recommended torque	0.4	0.9	1.4	3.2	11.2	27.6

(alloy steel bolt)

speed applications. Contact NB for further details.

Figure B-24 Example of Installed Grease Fitting

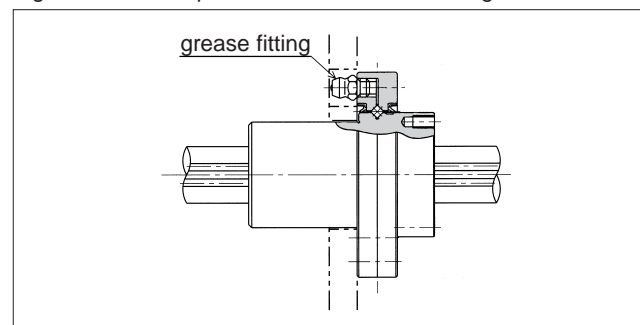

OPERATING ENVIRONMENT

Certain operating environments may prevent the full functionality of the rotary ball spline from being achieved expected accuracies. The operating environment should be taken into consideration when designing the system.


Operating Temperature:



Resin retainers are used in the rotary ball spline, so the operating temperature should never exceed 80°C.

Dust Prevention:




The invasion of foreign particles and dust may affect the motion characteristics of the rotary ball spline and shorten the travel life. Seals will perform well under normal operating conditions, but may not completely prevent the entry of dust in a hostile environment. When used in such environments, a dust prevention mechanism such as bellows or covers should be used to protect the rotary ball spline.

APPLICATION EXAMPLES

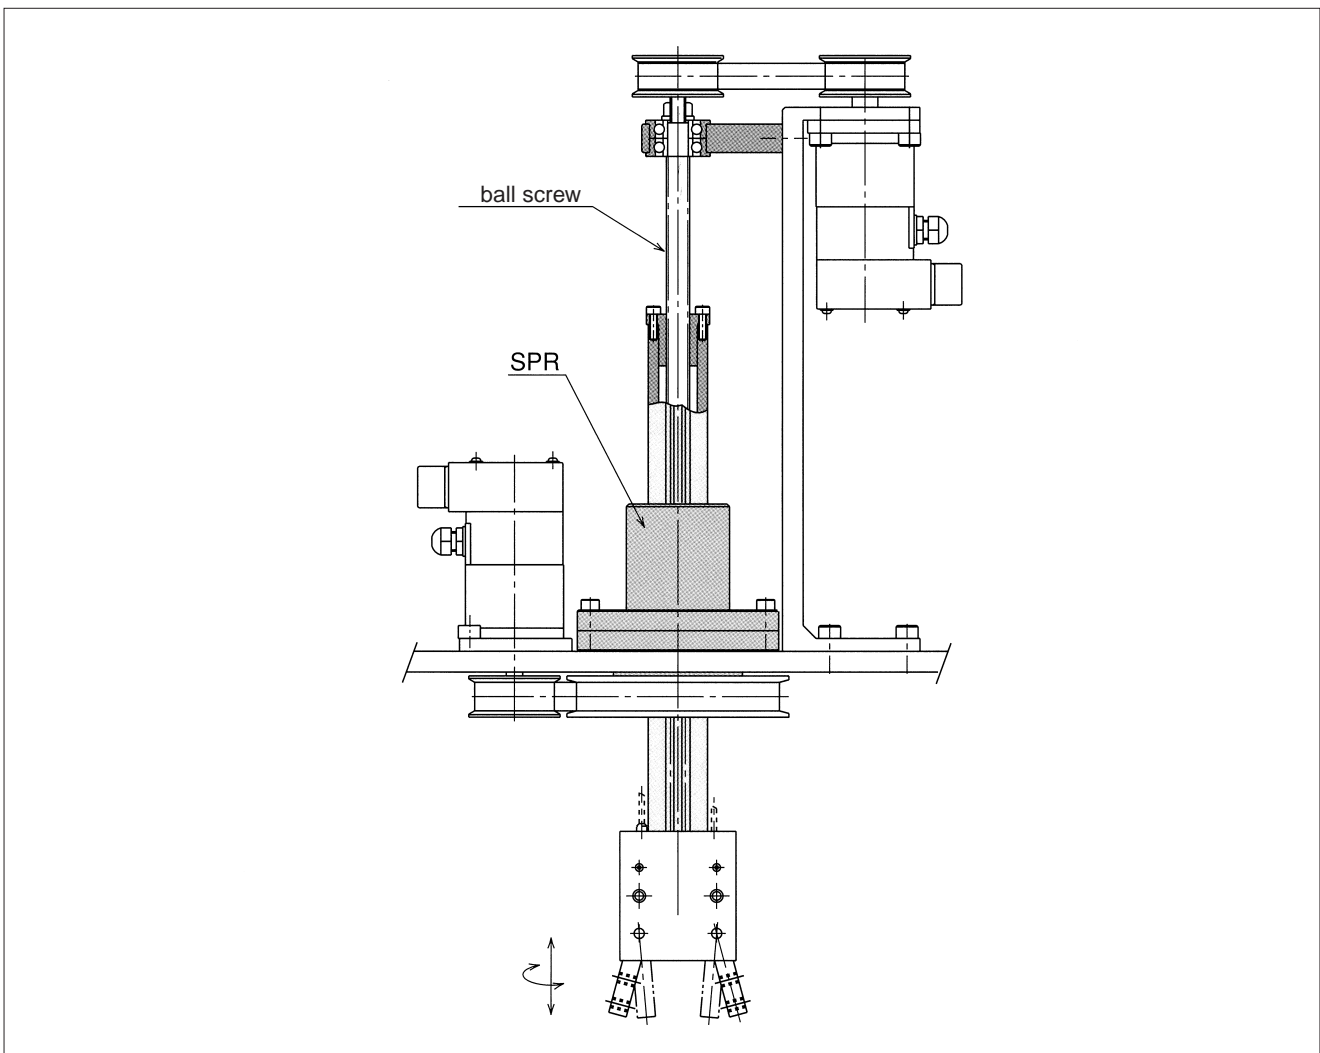

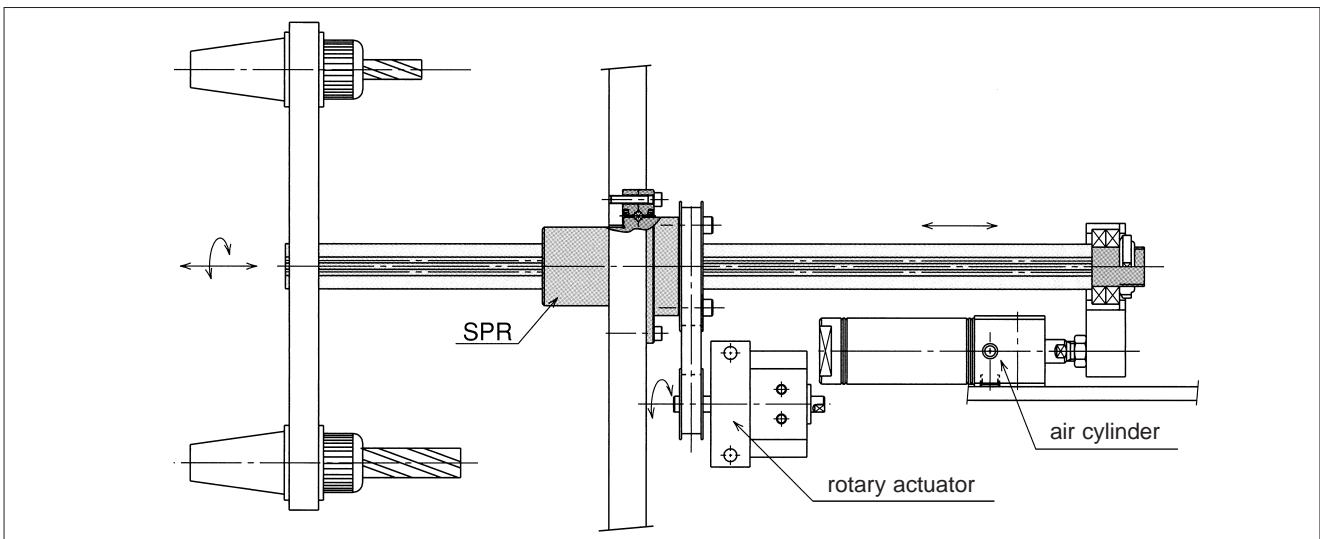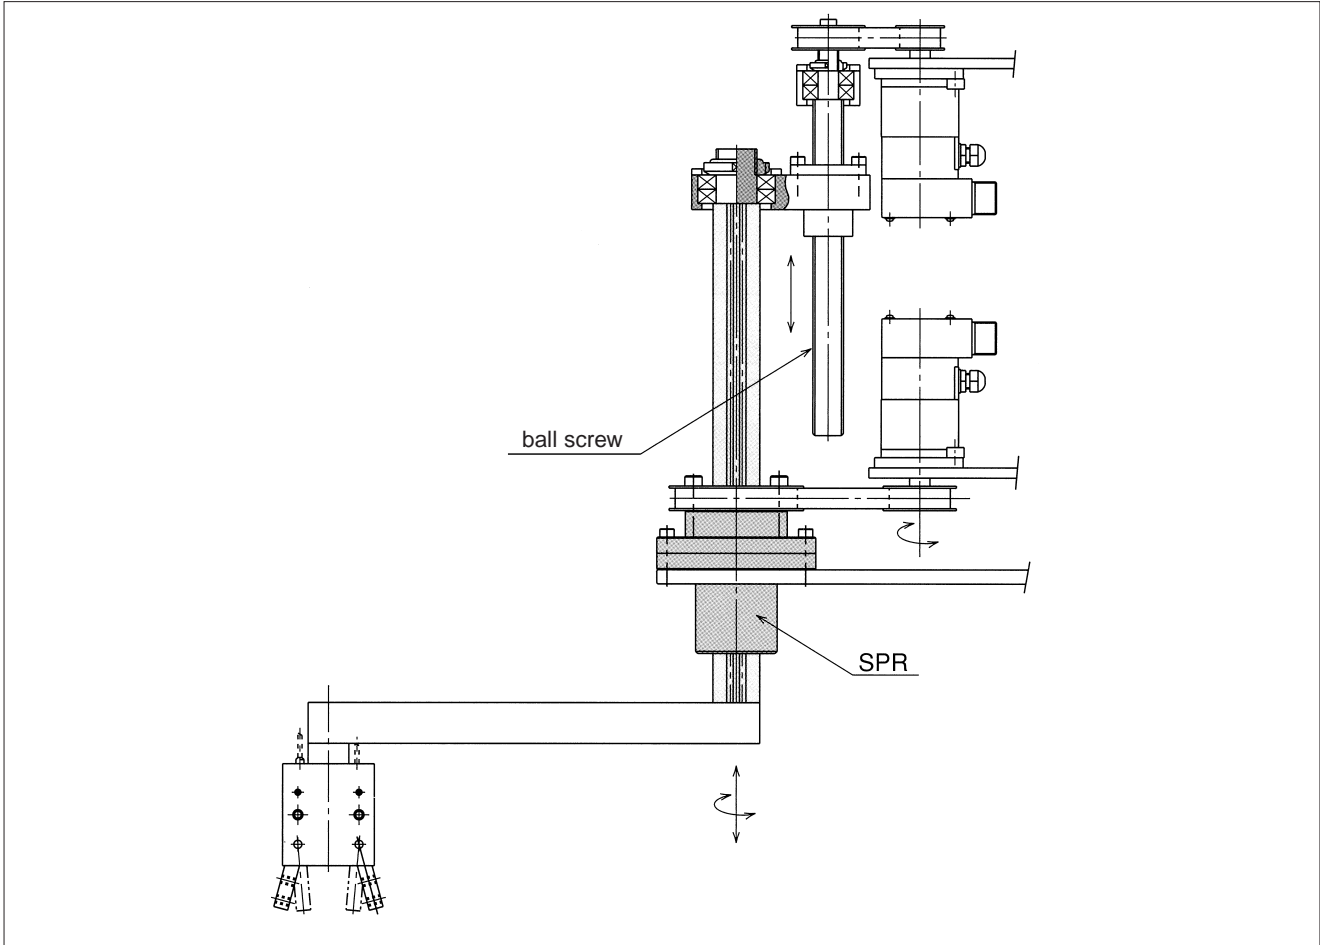


SPR TYPE

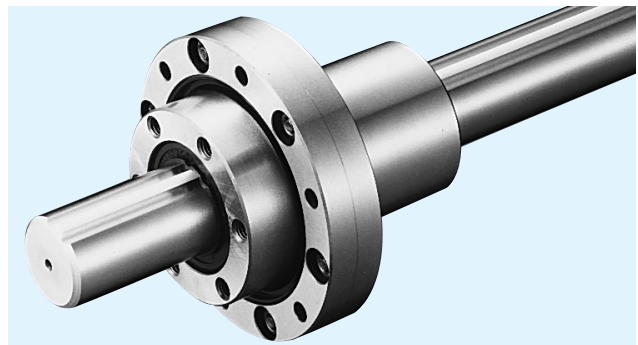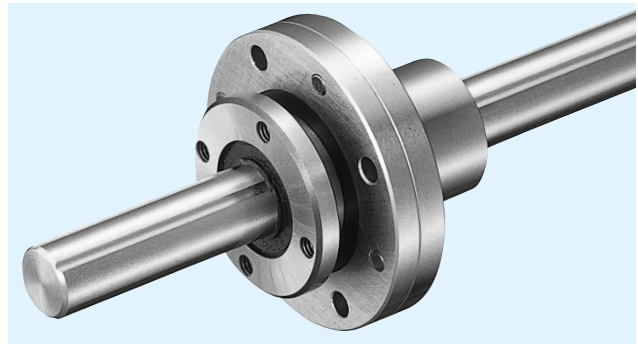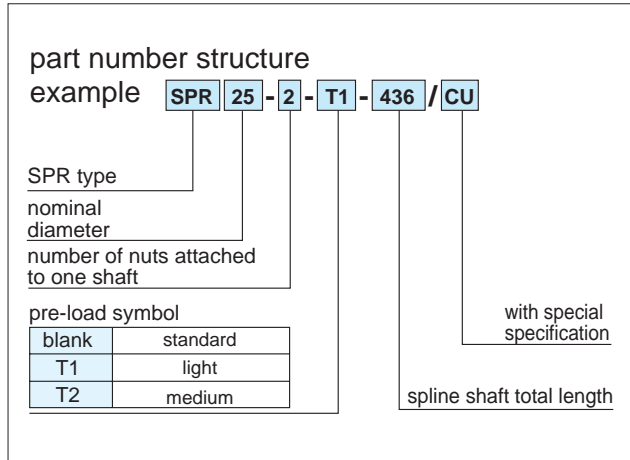

part number	ball spline major dimensions								major dimensions of support bearing							
	D ₁		D ₂	L	P ₁	S	h	l	H	D ₃		P ₂	d	G	θ°	
	mm	tolerance μm								mm	mm					mm
SPR 6	20		13	25	0	16	M2	2.5	5	6.5	30	0/-21	24	2.4	φ2	20°
SPR 8	22	0	15	25	-0.2	18	M2.5	3	6	6.5	33	-25	27	2.9		
SPR10	27	-21	19	33		22	M3	4	8	7	40		33	3.4		
SPR13	29		24	36	-0.2	24	M3	5	8	9	50	-25	42	3.4	φ3	15°
SPR16	36		31	50		30	M4	6	10	11	60		50	4.5		
SPR20A	44		35	63	-0.2	38	M4	7	12	13	72	-30	62	4.5	M6 × 0.75	15°
SPR20	40	0	34	60		34	M4	7	12	13	66		56	4.5		
SPR25A	55	-25	42	71	-0.3	47	M5	8	13	16	82	-35	72	4.5		
SPR25	50		40	70		42	M5	8	13	16	78		68	4.5		
SPR30	61	0	47	80	-0.3	52	M6	10	17	17	100	-40	86	6.6		
SPR40	76	-30	62	100		64	M6	10	23	20	120		104	9		
SPR50	88	0	75	112	-0.3	77	M8	13	24	22	130	-40	114	9		
SPR60	102	-35	90	127		90	M8	13	25	25	150		132	9		

ROTARY BALL SPLINE

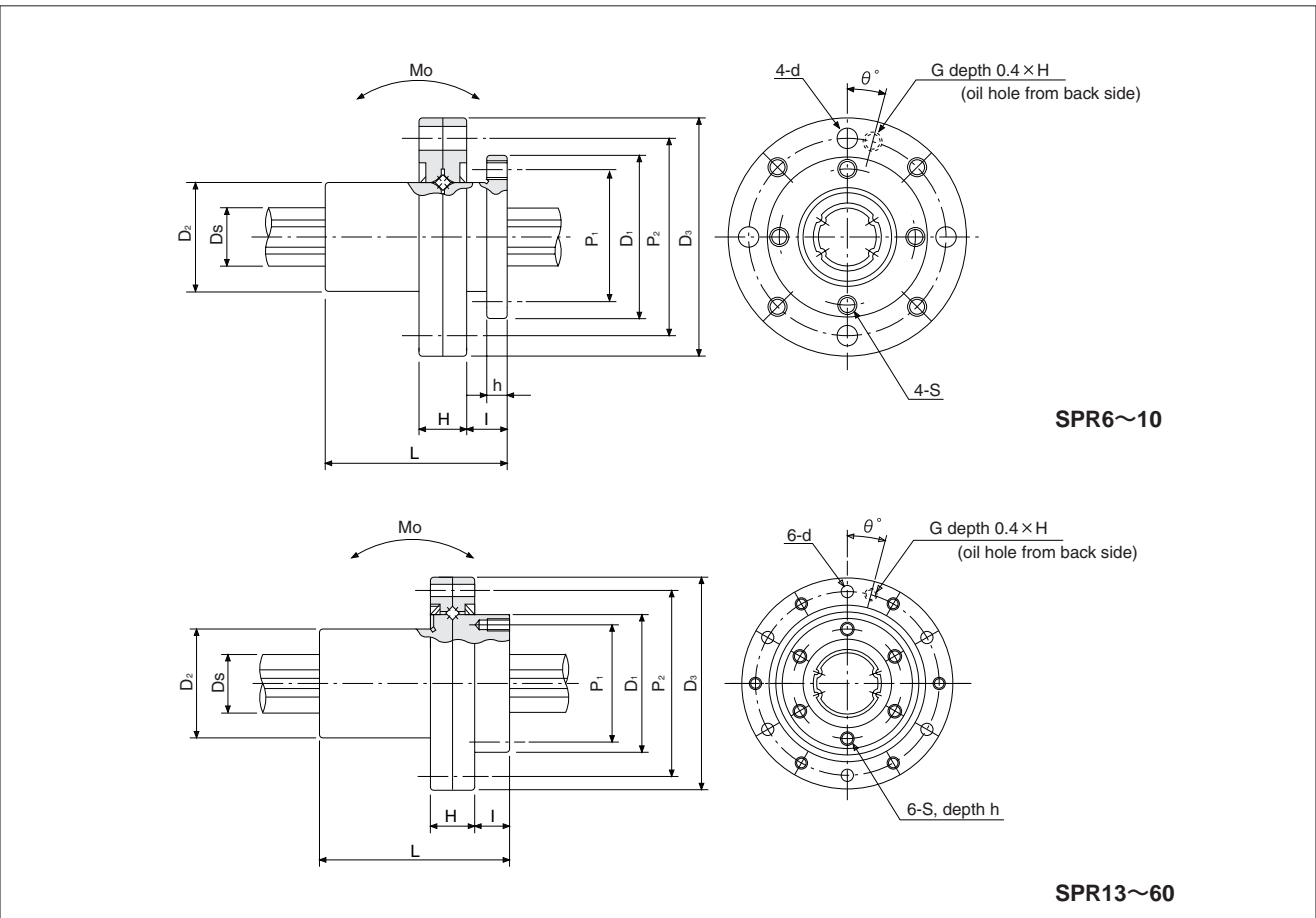

spline shaft		ball spline				support bearing		allowable static moment	second cross-sectional moment of inertia	cross-sectional coefficient	mass		※maximum rotational speed	part number
Ds	tolerance	basic torque rating		basic load rating		basic load rating					nut	spline shaft		
mm	μm	C _T	C _{OT}	C	C _o	C _R	C _{OR}	Mo	mm ⁴	mm ³	kg	kg/m		
6	0/-12	1.5	2.4	1.22	2.28	0.6	0.5	5.1	5.9 × 10 ³	1.97 × 10 ³	0.04	0.21	3,500	SPR 6
8	0	2.1	3.7	1.45	2.87	1.2	1.14	7.4	1.9 × 10 ³	4.76 × 10 ³	0.05	0.38	3,500	SPR 8
10	-15	4.4	8.2	2.73	5.07	2.4	2.45	18.0	4.61 × 10 ³	9.22 × 10 ³	0.09	0.60	3,000	SPR10
13	0	21	39.2	2.67	4.89	3.0	3.70	13.7	1.38 × 10 ³	2.13 × 10 ²	0.17	1.0	1,800	SPR13
16	-18	60	110	6.12	11.2	5.6	6.70	46	2.98 × 10 ³	3.73 × 10 ²	0.33	1.5	1,500	SPR16
20	0 -21	105	194	8.9	16.3	6.61	7.89	63	7.35 × 10 ³	7.34 × 10 ²	0.57	2.4	1,100	SPR20A
18.2		83	133	7.84	11.3	5.90	7.35	63	5.05 × 10 ³	5.54 × 10 ²	0.45	2.0	1,200	SPR20
25		189	346	12.8	23.4	10.0	13.4	171	1.79 × 10 ⁴	1.43 × 10 ³	0.81	3.7	900	SPR25A
23		162	239	12.3	16.1	9.11	11.5	104	1.27 × 10 ⁴	1.11 × 10 ³	0.75	3.1	1,000	SPR25
28		289	412	18.6	23.2	13.2	18.0	181	2.75 × 10 ⁴	1.96 × 10 ³	1.25	4.8	800	SPR30
37.4	0	637	882	30.8	37.5	22.8	32.3	358	8.73 × 10 ³	4.67 × 10 ³	2.30	8.6	800	SPR40
47	-25	1,390	3,180	46.1	74.2	27.2	42.1	696	2.16 × 10 ⁵	9.21 × 10 ³	3.10	13.1	570	SPR50
56.5	0/-30	2,100	4,800	58.0	127.4	30.0	48.2	1,300	4.51 × 10 ⁵	1.60 × 10 ⁴	4.70	19	500	SPR60

※Maximum rotational speed for grease lubrication.

1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m

Contact NB for further information when higher speeds or oil lubrication is required.

STROKE BALL SPLINE

The NB stroke ball spline SPLFS type is a high accuracy linear motion bearing with a limited stroke, to which both radial load and torque can be applied at the same time. It operates with extremely small dynamic friction.

STRUCTURE AND ADVANTAGES

The NB stroke ball spline consists of a nut and a shaft both with raceway grooves. Since the retainer in the nut is equipped with a ball pocket, the steel balls, (rolling elements) do not contact each other, which allows for a smooth linear motion.

In a linear motion, however, the retainer moves a half of the travel distance. Therefore, the linear travel stroke is limited up to twice as long as the distance that the retainer can move in the nut. For normal operation, it is recommended to consider 80% of the maximum stroke shown in the dimension list as an actual travel distance.

Extremely Small Dynamic Friction and Low Noise:

The rolling elements are separated by the ball pockets so that they do not contact each other. The stroke length is limited, but extremely small dynamic friction and low noise are realized because the rolling elements do not circulate.

Compact-Size:

With the nut about 20% smaller than existing ball splines, it contributes to space saving.


All Stainless Steel:

Since all the components are made of stainless steel, this stroke ball spline has an excellent corrosion resistance and heat resistance (operating temperature: -20 to +140°C). It is ideal for clean-room or vacuum applications.

Lubrication:

A lubricant groove and two lubrication holes are provided on the outer surface of the nut, which allow for an easy designing of lubricant replenishment.


Figure B-25 Structure of SPLFS Type

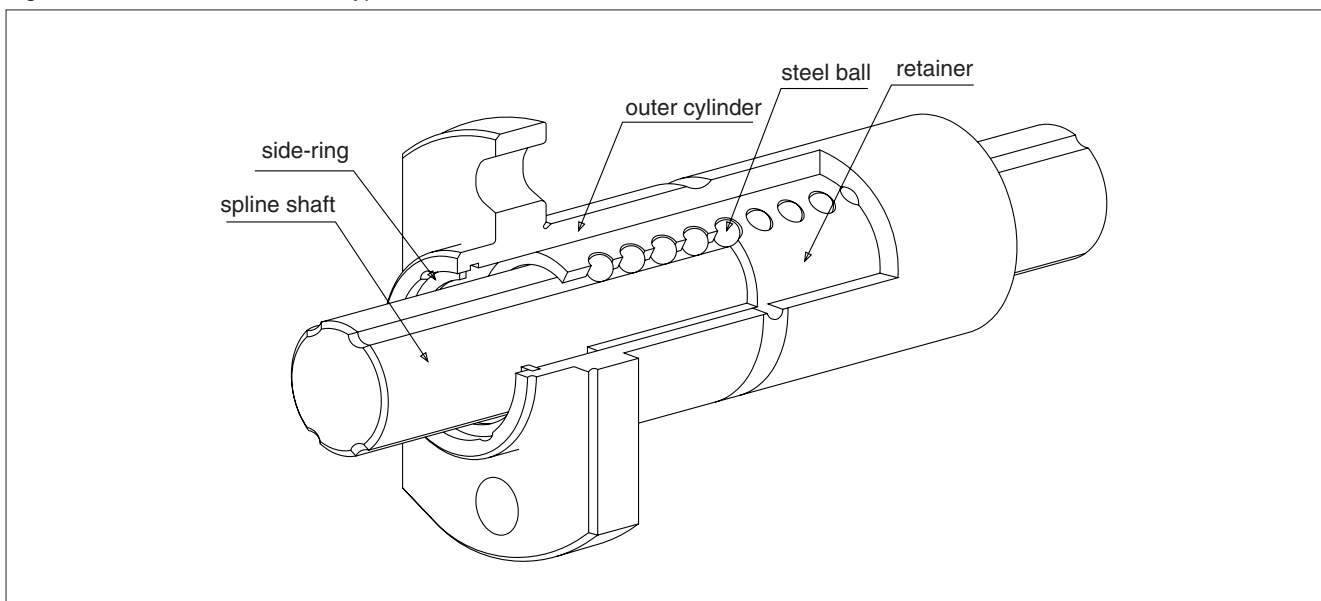

ACCURACY

The accuracy of the NB stroke ball spline is measured as shown in the figure below.

Figure B-26 Accuracy

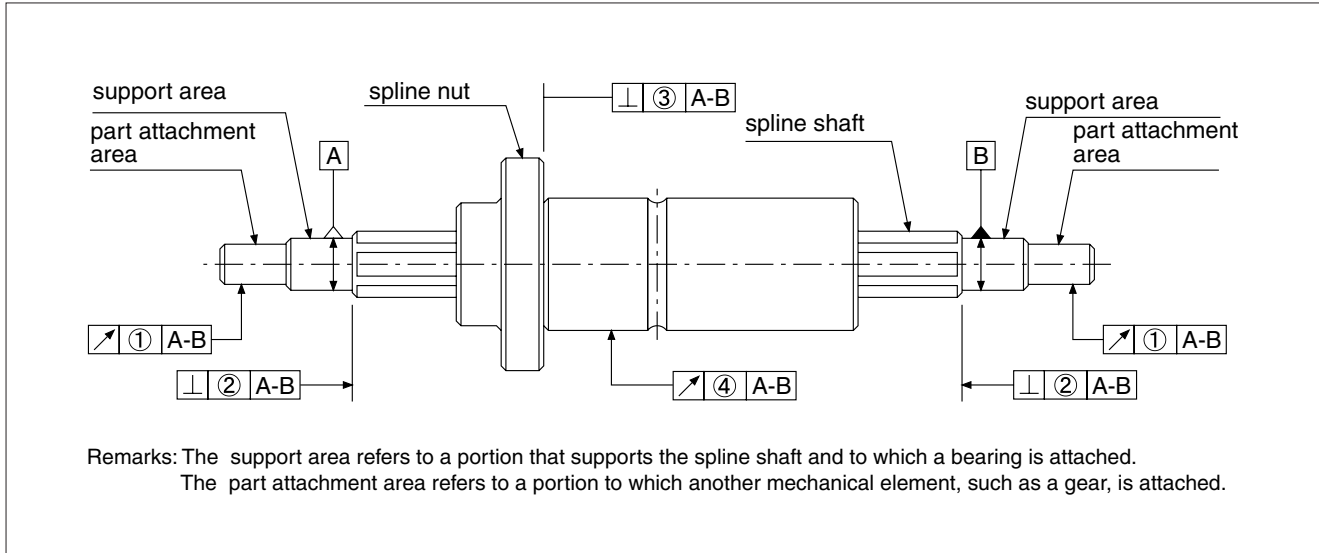

Spline Shaft/Groove Distortion Tolerance (Maximum)

Groove distortion is measured at a given 100 mm out of the effective length of the spline portion. When the travel distance is less or more than 100 mm, increase or decrease the value shown in Table B-22 in proportion to the travel distance.

Table B-22 Spline Shaft/Groove Distortion Tolerance (Maximum)

tolerance (μm)
13

Table B-23 Tolerance of Parts Relative to Spline Support Area (Max.)

unit/ μm

part number	① radial run out of part attachment area	② perpendicularity of the end of the spline shaft section	③ perpendicularity of the flange
SPLFS 6	14	9	11
SPLFS 8	14	9	11
SPLFS10	17	9	13
SPLFS13	19	11	13
SPLFS16	19	11	13

Table B-24 ④Radial Run-Out of Outer Surface of Spline Nut Relative to Spline Support Area (Max.)

unit/ μm

spline shaft total length		part number		
greater than	or less	SPLFS6,8	SPLFS10	SPLFS13,16
	200	46	36	34
200	315	89	54	45
315	400	126*	68	53
400	500	163*	82	62
500	630	—	102	75
630	800	—	—	92
800	1,000	—	—	115
1,000	1,250	—	—	153
1,250	1,500	—	—	195

* maximum fabrication length of SPLFS6: 400 mm

PRE-LOAD AND CLEARANCE IN ROTATIONAL DIRECTION


Both the clearance and pre-load are expressed in terms of clearance in the rotational direction. For the SPLFS type, only the standard value shown below is available. Contact us if you need a clearance other than shown in Table B-25.

Table B-25 Pre-Load and Clearance in Rotational Direction unit/ μm

part number	standard
SPLFS 6	0~-4
SPLFS 8	0~-4
SPLFS10	0~-4
SPLFS13	0~-4
SPLFS16	0~-4

COMPARISON OF DYNAMIC FRICTION RESISTANCE

Figure B-27 Comparison Data of dynamic Friction Resistance

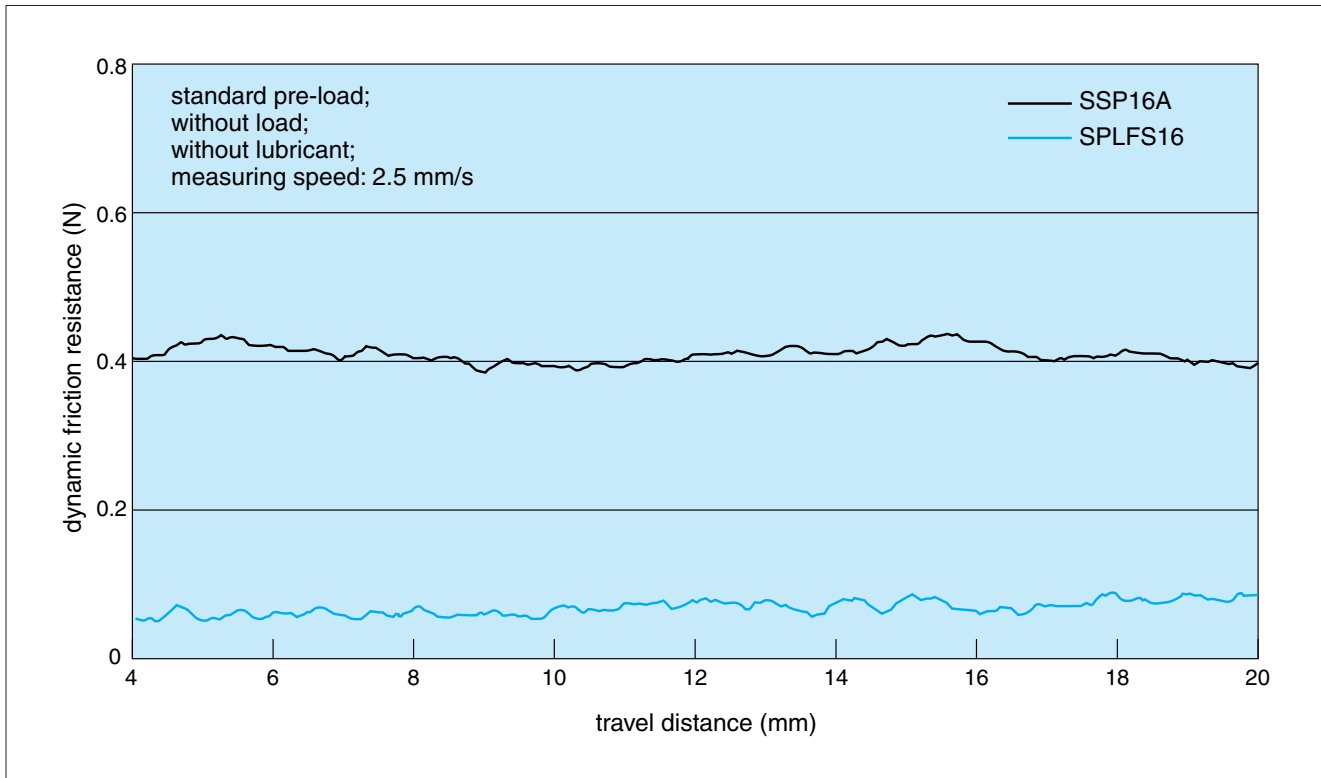

NOTES ON USE

Dust Control:

Since the stroke ball splines are designed and manufactured for operating with an extremely small dynamic friction resistance, any seal that increases the dynamic friction resistance is not equipped as a standard feature. If you use this type of spline under unfavorable conditions, contact us and a special seal will be available. For use under extremely unfavorable conditions, the stroke ball spline should be protected using bellows and protective covers.




Retainer Misalignment:

If the stroke ball spline is used at a high speed or with a vertical shaft, or under an asymmetric load or oscillation, a retainer misalignment may occur. For general operation, it is recommended to consider 80% of the maximum stroke length shown in the dimension list as a travel distance.

In order to prevent the retainer misalignment, it is also recommended to conduct a full-stroke moving operation times during use so that the retainer will be relocated to the center.


SPLFS TYPE

- Two Side Cut Flange Type -

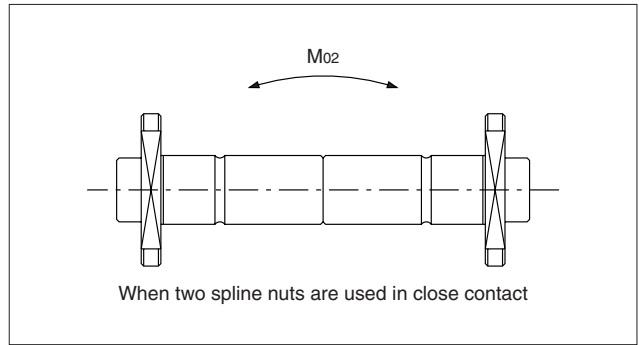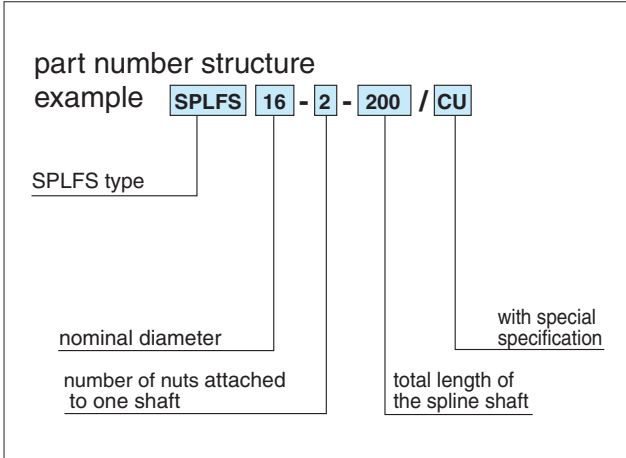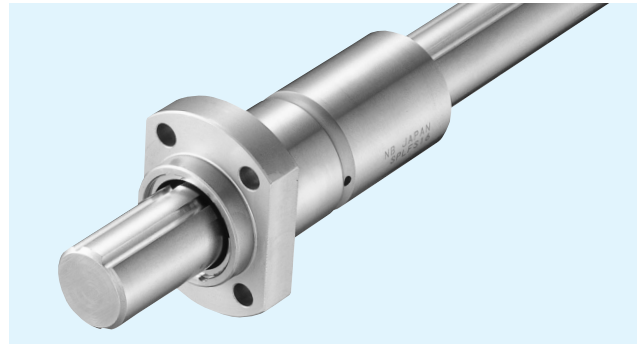

part number	maximum stroke mm	major dimensions												
		D		D ₁	L		E	D _f	H	B	P.C.D.	A	F	N ₁ -S
		mm	tolerance μm		mm	mm								
SPLFS 6	22	11	0	10	40	0 -0.2	3.3	23	4	14	17	-	-	2-3.4
SPLFS 8	20	13	-8	12.5	40		3.3	25.5	4	16	19.5	-	-	2-3.4
SPLFS10	28	16		15.5	50		3.3	28.5	5	20	-	18	13	4-3.4
SPLFS13	24	20	0	19.5	50		4.8	36	5	25	-	22	17	4-3.4
SPLFS16	26	24	-9	23.5	60		4.8	40	7	29	-	25	19	4-4.5

STROKE BALL SPLINE

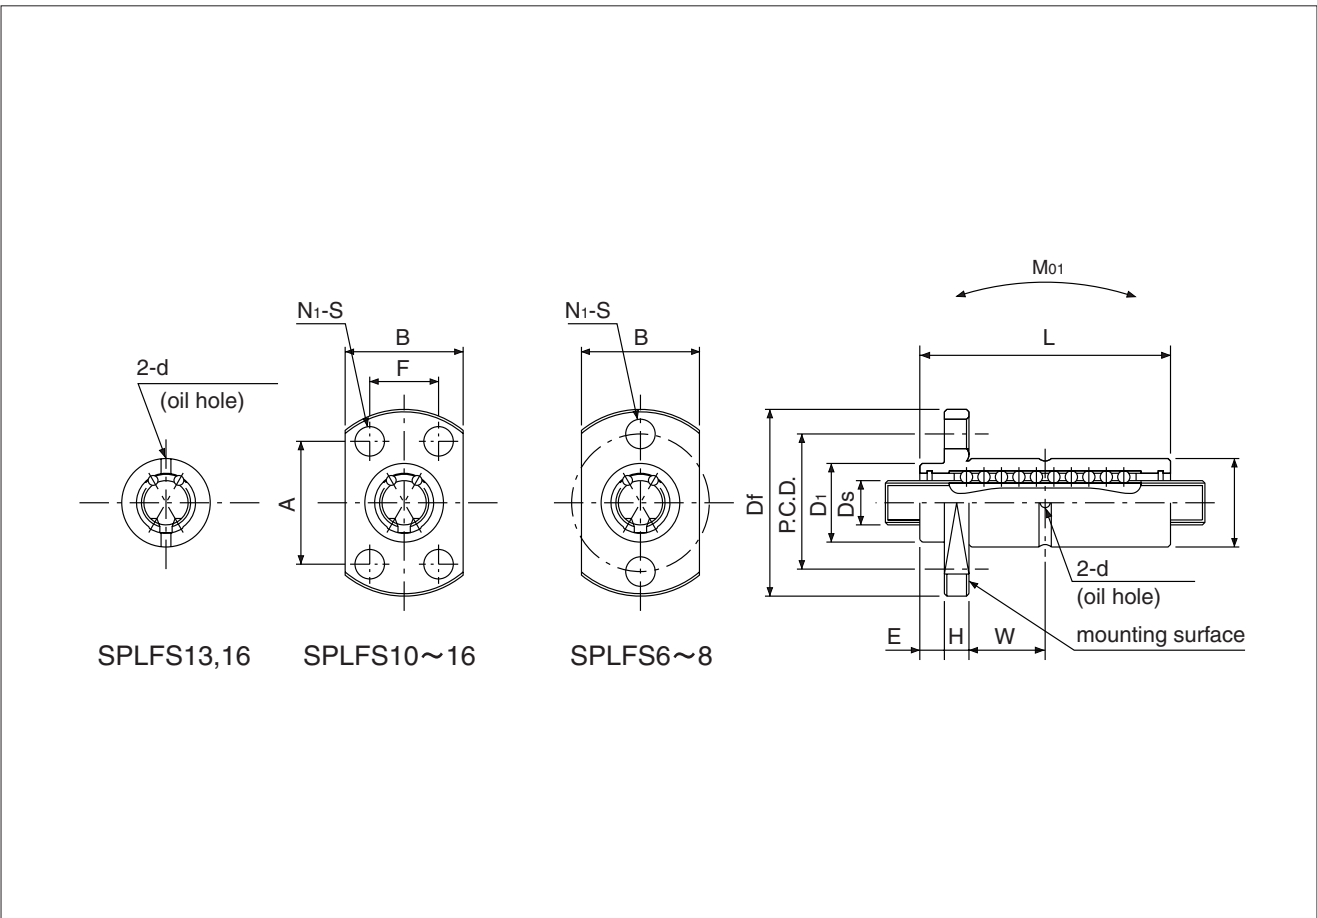

W	d	Ds		basic torque rating		basic load rating		allowable static moment		second cross-sectional moment	mounting surface	mass		size
		mm	tolerance μm	dynamic C _T N·m	static C _{0T} N·m	dynamic C kN	static C ₀ kN	M ₀₁ N·m	M ₀₂ N·m			nut g	shaft kg/m	
12.7	1.2	6	0/-12	1.5	2.4	1.8	3.0	11.2	45	5.9 × 10	1.97 × 10	21.5	0.21	6
12.7	1.2	8	0	3.3	5.5	2.02	3.37	13.1	52	1.9 × 10 ²	4.76 × 10	27.0	0.38	8
16.7	1.5	10	-15	6.5	10.9	3.21	5.35	25.6	102	4.61 × 10 ²	9.22 × 10	47.7	0.6	10
15.2	1.5	13	0	27.6	50.7	4.15	7.6	38.8	155	1.38 × 10 ³	2.13 × 10 ²	75.3	1.0	13
18.2	2.0	16	-18	62.8	115	7.66	14	88.3	353	2.98 × 10 ³	3.73 × 10 ²	123.5	1.5	16

1N ≒ 102kgf 1N·m ≒ 0.102kgf·m

SLIDE GUIDE
 BALL SPLINE
 ROTARY BALL SPLINE
 STROKE BALL SPLINE
 TOPBALL® PRODUCTS
 SLIDE BUSH
 SLIDE UNIT
 STROKE BUSH
 SLIDE ROTARY BUSH
 SLIDE SHAFT
 SLIDE WAY/GONIO WAY
 SLIDE TABLE
 MINIATURE SLIDE
 ACTUATOR
 SLIDE SCREW