

**SLIDE
WAY**

**SLIDE
TABLE**

**MINIATURE
SLIDE**

**GONIO
WAY**

SLIDE GUIDE

BALL SPLINE
ROTARY BALL SPLINE
STROKE BALL SPLINE

TOPBALL® PRODUCTS

SLIDE BUSH

SLIDE UNIT

STROKE BUSH
SLIDE ROTARY BUSH

SLIDE SHAFT

SLIDE WAY/GONIO WAY
SLIDE TABLE
MINIATURE SLIDE

ACTUATOR

SLIDE SCREW

SLIDE WAY

STUDROLLER system
NV type/NVT type

NB' s Slide Way NV and NVT types incorporate STUDROLLER, which has been developed based upon a new concept. By completely eliminating slippage between the roller and track surfaces, these new Slide Ways possess the smoothest and most accurate linear movement in the world.

STRUCTURE AND ADVANTAGES

NB' s Slide Way NV and NVT types consist of precisely ground tracking bases and R-retainers with built-in stud-rollers. To smooth the STUDROLLER, the tracking rail is optimally designed and the R-retainer incorporates the STUDROLLER and the precise roller. These ideas will enable slip-free operation between the raceway surface and the roller, resulting in motion with minimal frictional resistance.

Non-slip STUDROLLER System

The built-in STUDROLLER system, based on the new concept, completely eliminates slip inside the product, covering various applications including super-high acceleration/deceleration applications.

Compatibility with conventional types

The same dimensions and the same stroke as the Slide Way SV type enable complete compatibility between the two series.

Smooth movement

The optimally designed roller raceway section and the R-retainer ensure smooth, noiseless movement.

Space and Cost Saving

Increased load capacity allows for down-sizing and lowering costs of the component, thus enabling space and cost saving. (comparing with conventional SV type.)

High rigidity and high-loading capacity

Based on the new tracking base design, the contact length of the roller and the raceway surface is increased by 42 to 58%, and narrowing the roller pitch increases the number of roller units to be connected. Accordingly, the load rating is 1.4 to 2.3 times greater when compared to the conventional SV type.

Figure H-1 detailed roller contact image

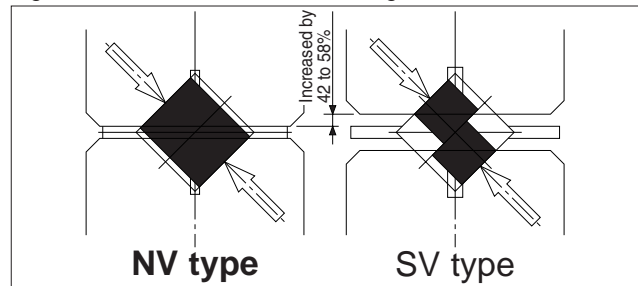


Figure H-2 STUDROLLER system

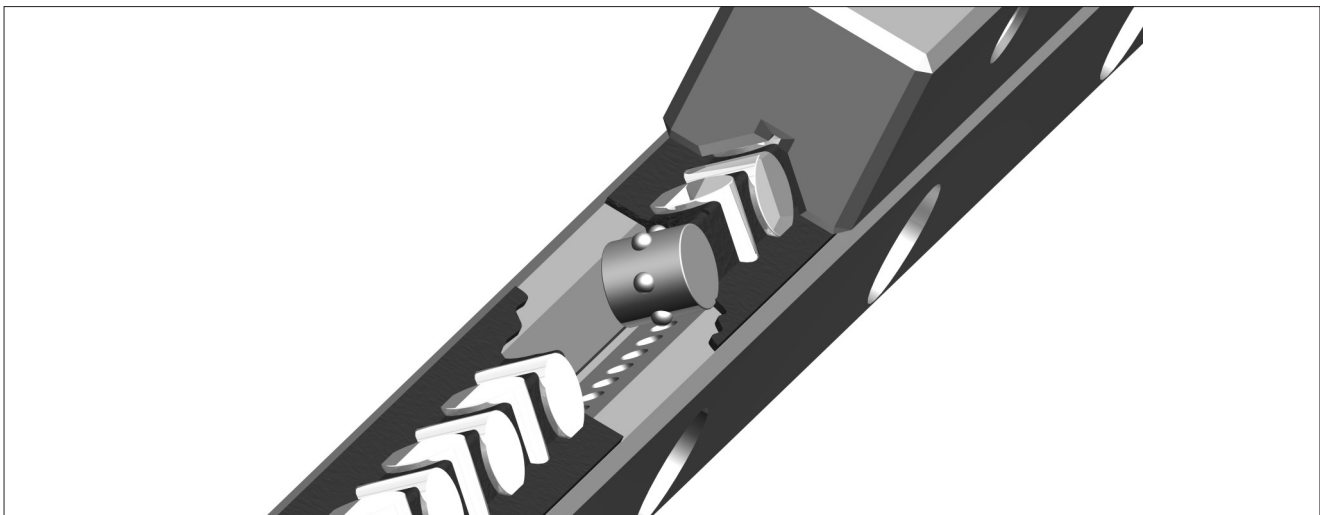


Figure H-3 Structure of NV type



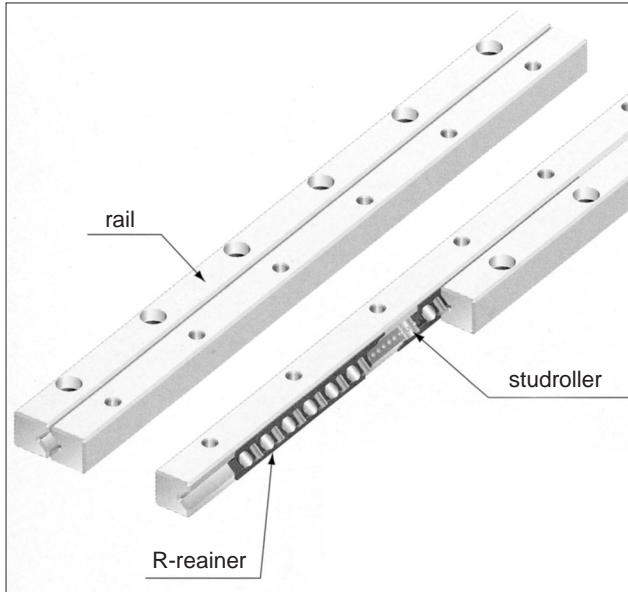


Figure H-4 Structure of NVT type

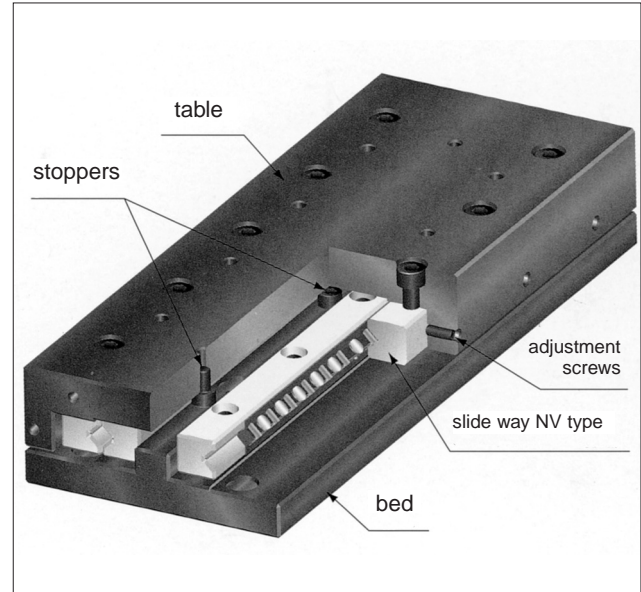

TYPE


NV type

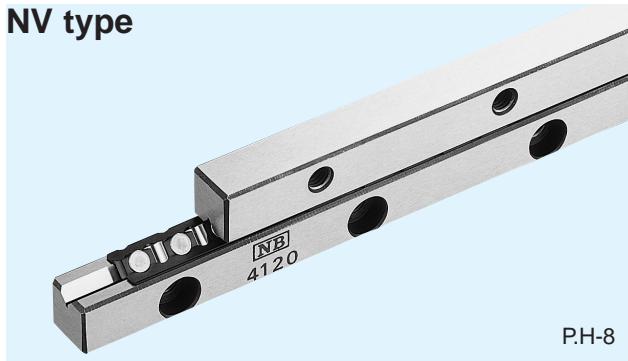

NV type

This consists of a set of four track rails and two R-retainers. Flexible table design allows for a wide range of applications best suited to your purpose.

NVT type

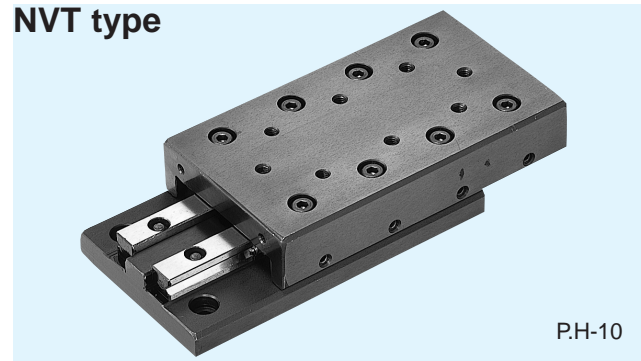

NVT type


A slide table incorporates the NV type. The precisely machined table and bed ensure great accuracy. This table may be used as received without any troublesome accuracy or preload adjustments.

ACCURACY

NV type

The accuracy of the Slide Way NV type is represented as parallelism obtained from full-length measurement as shown in Figure H-5. It is classified into three grades: High (no symbol), Precision (P) and Ultra Precision (UP). The Slide Way NV type is available for special accuracy. Please contact NB for details.

Figure H-5, Parallelism

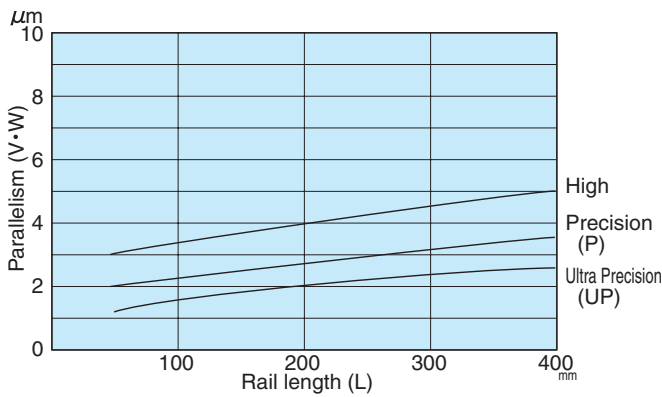

NVT type

The motion accuracy of the slide table NVT type is represented as deviation on the dial indicators attached to the center of the top and side of the table, when the table runs full stroke without load.

Figure H-6, Accuracy Measurement


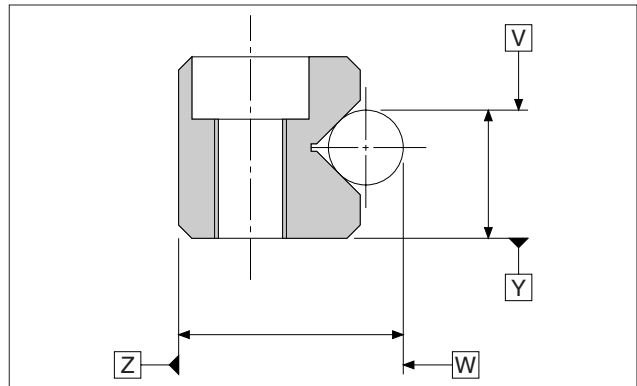


Figure H-7, Accuracy Measurement

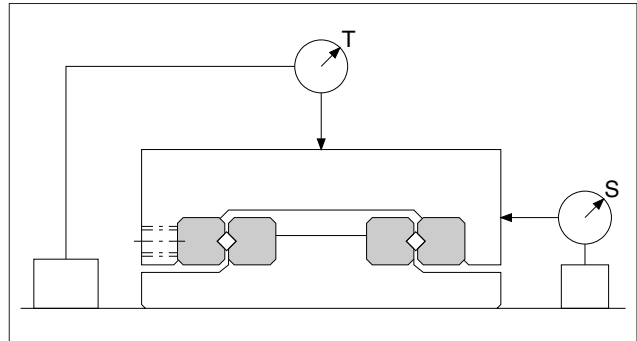

LOAD RATING


The load rating of the Slide Way NV and NVT type varies depending on the direction of load.

Table H-1 Load Rating

Basic dynamic load rating	Normal vertical direction	$1.0 \times C$
	Horizontal direction	$0.9 \times C$
	Reverse vertical direction	$0.8 \times C$
Basic static load rating	Normal vertical direction	$1.0 \times C_0$
	Horizontal direction	$0.9 \times C_0$
	Reverse vertical direction	$0.8 \times C_0$

※The load rating ratio above may be different for particular sizes. Please contact NB for further details.

Figure H-8 Direction of Load

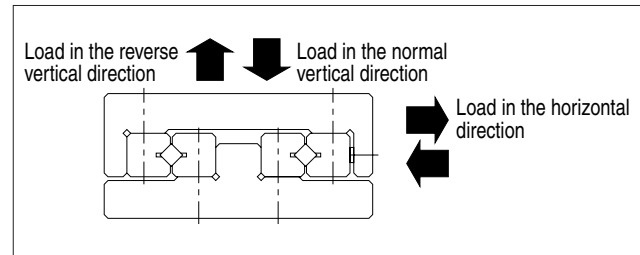

RATED LIFE

The life of the Slide Way and Slide Table are calculated using the following equation:

Rated life

$$L = \left(\frac{1}{f_w} \cdot \frac{C}{P} \right)^{10/3} \cdot 50$$

L: rated life, f_w : load coefficient, C: basic dynamic load rating (N), P: load (N).
 ※For each coefficient, please refer to page Eng.-5

Life Time

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n_1 \cdot 60}$$

L_h : life time (hours), ℓ_s : stroke (m), n_1 : number of cycles per minute (cpm)

MOUNTING NV TYPE

Accuracy of mounting surface

To maximize the performance of the NB Slide Way, it is recommended that accuracy of the mounting surface should be finished to be equal to or greater than the parallelism level of the Slide Way.

- Parallelism of surface 1 against surface A
- Perpendicularity of surface 2 against surface A
- Parallelism of surface 3 against surface B
- Perpendicularity of surface 4 against surface B
- Parallelism of surface 2 against surface C
- Parallelism of surface 4 against surface C

Installation Procedure

- (1) Remove burrs, stains, and dust from the surface of the track rail of tables and beds to prevent contamination during assembly.
- (2) Apply low-viscosity oil to contact surfaces, and attach the tables to the beds (Figure H-11a).
- (3) Set the reference surface shown in Figure H-6 onto the mounting surface with the track rail assembled. Tighten adjusting screws lightly so that almost no gap is left while the table is set in the center (Figure H-11b).
- (4) Keep table in the center, tighten track rail mounting bolts lightly and peel the connection seal from both edges.
- (5) While maintaining the conditions in (4), tighten the adjusting screw on the R-retainer with the recommended torque shown in Table H-2 (Figure H-11c).
- (6) Move the table to one stroke end gently then, tighten the adjusting screw on the R-retainer in the same manner as in (5) (Figure H-11d).
- (7) Move the table to the opposite stroke end and tighten the adjusting screw in the same manner as in (5) (Figure H-11e).
- (8) Tighten the mounting bolts on track rail 1, 2 and 3 with the recommended torque shown in Table H-3 (Figure H-11f).
- (9) Set the dial indicators to the top and the side of the reference surface of the table (Figure H-11g).
- (10) Make final adjust of pre-load. Repeat steps (5) to (7) until the indicator will show a minimum deviation.
- (11) Finally, tighten the bolt on track rail ④ with the recommended torque. Be sure to tighten the mounting bolts on the R retainer sequentially while moving the table as when tightening the adjusting screws.

Table H-2 Recommended Torque for Adjusting Screw Unit/N•m

Part number	Size of screws	Torque
NV3	M4	0.05
NV4	M4	0.08
NV6	M5	0.20

Table H-3 Recommended Torque for Mounting Bolts Unit/N•m

Size of screws	Torque
M3	1.4
M4	3.2
M5	6.6
M6	11.2

Figure H-9 Accuracy of Mounting Surface

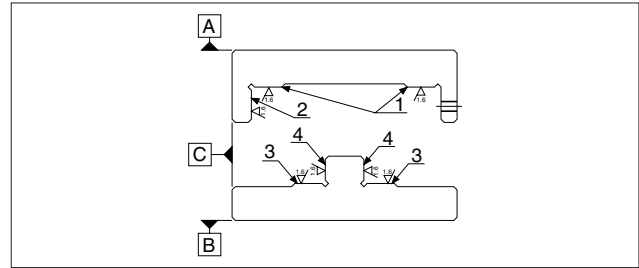


Figure H-10 Example of Mounting


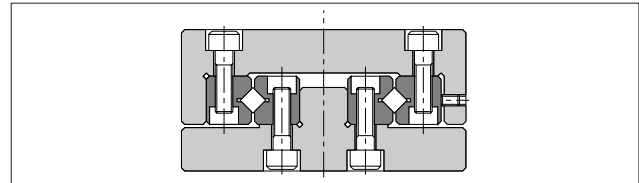


Figure H-11 Installation Method

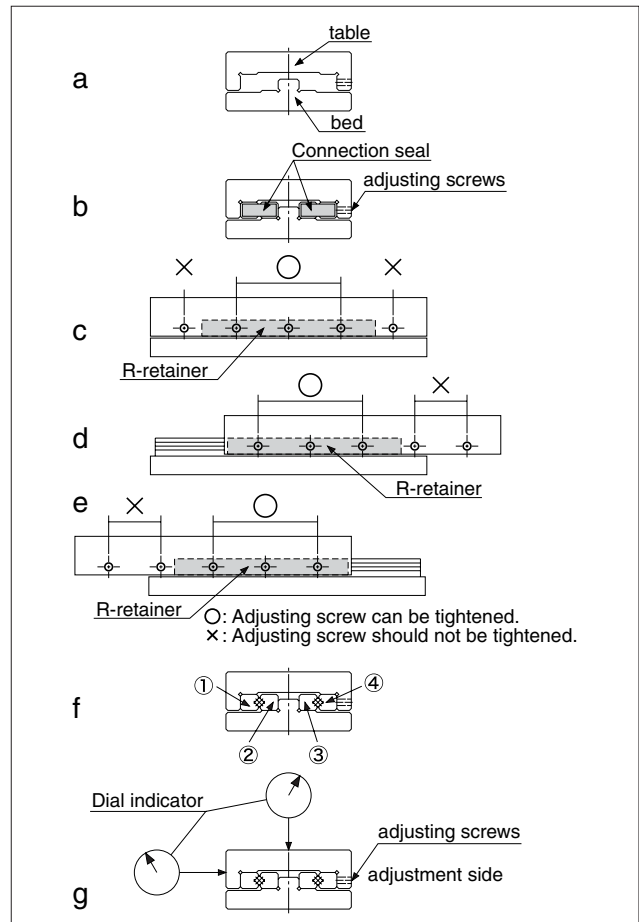


SPECIAL MOUNTING BOLT BT TYPE

To install the Slide Way using its counter bore, use of the special mounting bolt BT type is recommended.

Table H-4 Special Mounting Bolt

Part number	B	d mm	D mm	H mm	L ₁ mm	L ₂ mm	S mm	Applicable track rail
BT 3	M3	2.3	5	3	12	5	2.5	NV 3
BT 4	M4	3.1	5.8	4	15	7	3	NV 4
BT 6	M5	3.9	8	5	20	8	4	NV 6

Figure H-12 Special Mounting Bolt

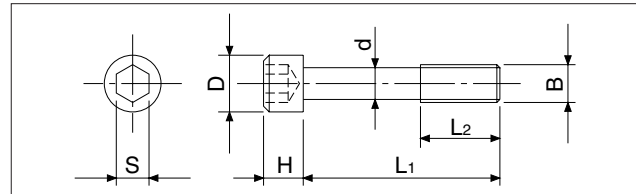

LUBRICATION AND DUST PREVENTION

Lubrication


The NB Slide Way is pre-lubricated using lithium soap-based grease prior to shipment and is therefore ready for immediate use. Make sure to lubricate with a similar type of grease periodically according to the operating conditions.

NB also provides grease for low-dust linear systems. Please refer to page Eng-20 for further details.

Dust prevention

When dust and dirt enter the NB Slide Way, the accuracy and operating life may deteriorate. It is advisable to install an additional protective cover to protect the unit in a harsh environment (Figure H-13).

Figure H-13 Example of Dust Prevention Mechanism

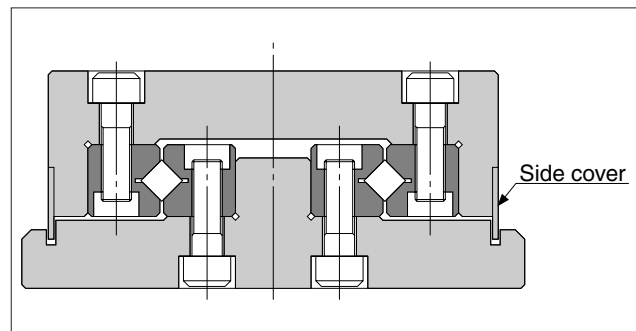

PRECAUTIONS FOR USE

Careful handling

NV type is packaged with the track rail and R retainer in one piece. Do not separate or disassemble these components until installation/assembly is completed. Dropping the NB Slide Way may cause the rolling elements to make dents on the raceway surface. This will prevent smooth motion and will also affect accuracy. Make sure to handle the product with care.

Stopper

Over-stroke may cause the raceway surface of the track rail to be damaged and the performance of the STUDROLLER to drastically deteriorate. Be sure to provide an external mechanical stopper and use the product within the maximum allowable stroke.

Adjustment

Using the product without mounting surface accuracy or before adjusting the pre-load will affect the life and

motion accuracy of the product. Make sure to install and adjust the product with care.

Operating temperature

NV type contains resin parts. When using the product in high-temperature environments, the temperature must be lower than 80°C.


Use as a set

The mutual accuracy in the track rails is adjusted within a particular set. Note that the accuracy may be affected when the track rails of different sets are used together in combination.

Adjusting screws


Accuracy and pre-load of the Slide Table NVT type is factory-adjusted to the optimal level. Do not touch adjusting screws and mounting screws.

NV TYPE

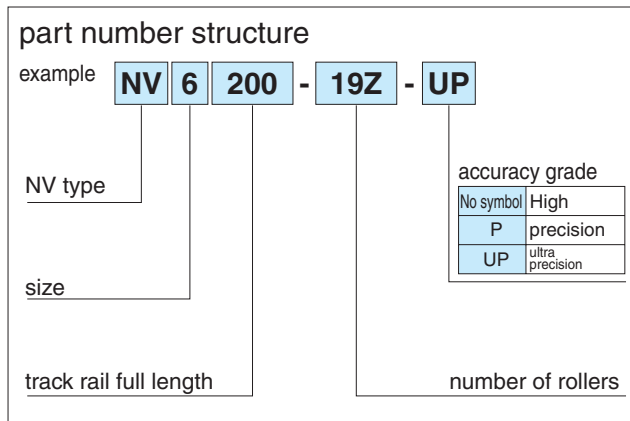

part number	stroke ST mm	roller diameter D mm	number of rollers Z					
				L mm	A mm	B mm	C mm	M×P mm
NV3050- 9Z	25	3	9	50	18	8	8.65	1×25
NV3075-13Z	48		13	75				2×25
NV3100-19Z	60		19	100				3×25
NV3125-23Z	83		23	125				4×25
NV3150-29Z	90		29	150				5×25
NV3175-35Z	103		35	175				6×25
NV3200-41Z	113		41	200				7×25
NV4080- 9Z	60	4	9	80	22	11	10.65	1×40
NV4120-17Z	75		17	120				2×40
NV4160-23Z	105		23	160				3×40
NV4200-29Z	130		29	200				4×40
NV4240-37Z	143		37	240				5×40
NV6100- 9Z	63	6	9	100	31	15	15.15	1×50
NV6150-15Z	85		15	150				2×50
NV6200-19Z	135		19	200				3×50
NV6250-25Z	158		25	250				4×50
NV6300-31Z	180		31	300				5×50


The basic static load rating represents a value at the center of stroke.

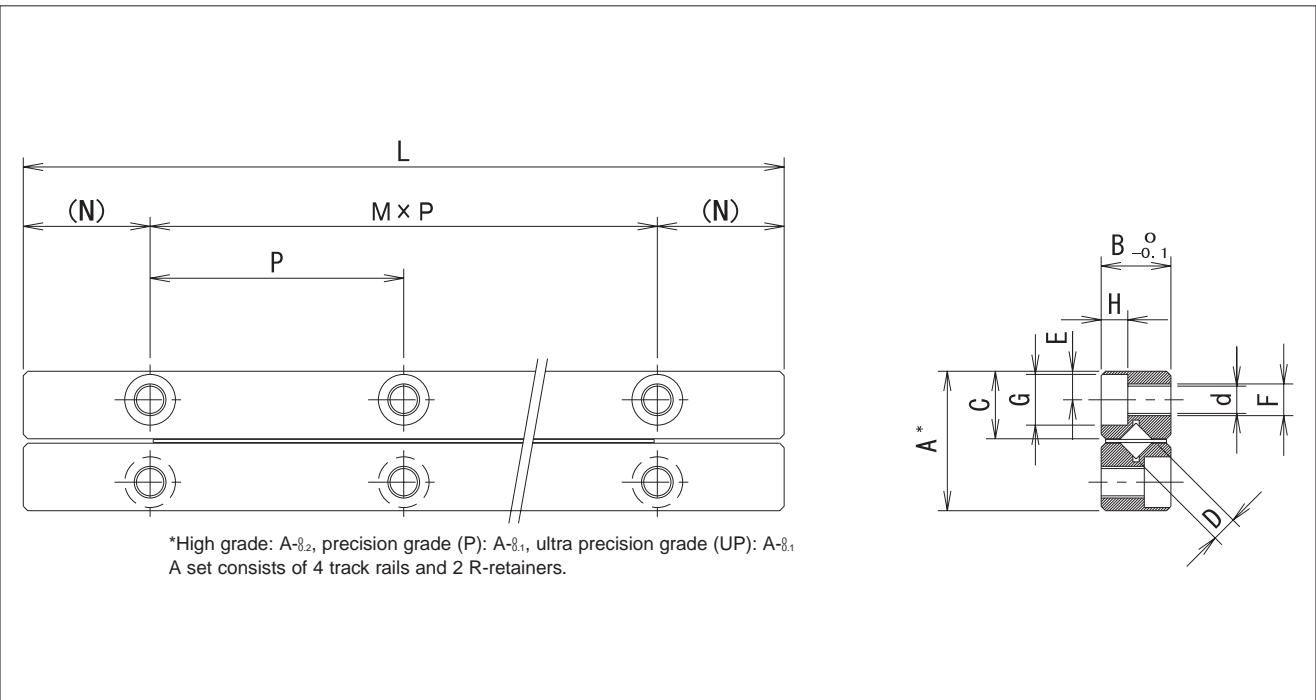

major dimensions						basic load rating		allowable load F N	mass g	size
N mm	E mm	F	d mm	G mm	H mm	dynamic C N	static Co N			
12.5	3.5	M4	3.3	6	3.1	6,150	8,060	2,680	97	3050
						8,440	12,100	4,030	140	3075
						12,500	20,100	6,720	192	3100
						14,400	24,200	8,060	245	3125
						16,300	28,200	9,410	290	3150
						19,800	36,300	12,100	337	3175
20	4.5	M5	4.3	8	4.2	21,500	40,300	13,400	385	3200
						12,100	15,700	5,250	265	4080
						20,700	31,500	10,500	400	4120
						28,500	47,200	15,700	530	4160
						32,000	55,100	18,300	660	4200
25	6	M6	5.2	9.5	5.2	39,000	70,900	23,600	800	4240
						29,600	37,500	12,500	650	6100
						50,900	75,100	25,000	970	6150
						60,600	93,900	31,300	1,300	6200
						69,800	112,000	37,500	1,620	6250
						87,400	150,000	50,100	1,940	6300


1kN ≈ 0.102kgf

NVT TYPE

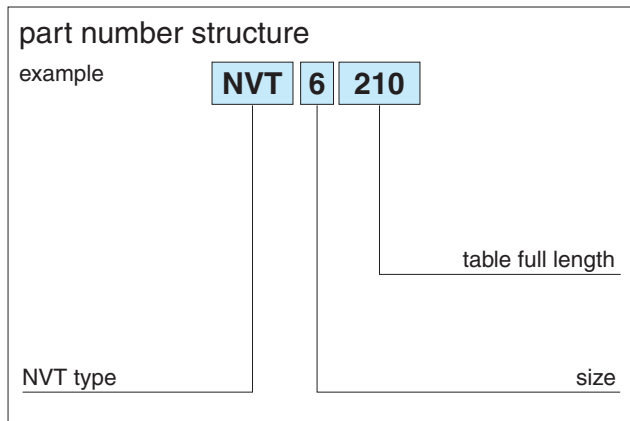

part number	stroke	dimensions				table-top mounting-hole dimensions					table-end mounting-hole dimensions					
	ST mm	A mm	B mm	L mm	b mm	P ₁ mm	S ₁	ℓ _a mm	N mm	M×P mm	h ₁ mm	h ₂ mm	t ₁ mm	t ₂ mm	S ₂	ℓ _b mm
NVT3055	30	28 ^{±0.1}	60 ^{±0.1}	55	18.5	25	M4	8	27.5	—	40	—	5.5	—	M3	6
NVT3080	45			80						1×25						
NVT3105	60			105						2×25						
NVT3130	75			130						3×25						
NVT3155	90			155						4×25						
NVT3180	105			180						5×25						
NVT3205	130			205						6×25						
NVT4085	50	35 ^{±0.1}	80 ^{±0.1}	85	24	40	M5	10	42.5	—	55	—	6.5	—	M3	6
NVT4125	75			125						1×40						
NVT4165	105			165						2×40						
NVT4205	130			205						3×40						
NVT4245	155			245						4×40						
NVT6110	60	45 ^{±0.1}	100 ^{±0.1}	110	31	50	M6	12	55	—	60	92	8	15	M4	8
NVT6160	95			160						1×50						
NVT6210	130			210						2×50						
NVT6260	165			260						3×50						
NVT6310	200			310						4×50						


The basic static load rating represents a value at the center of stroke.

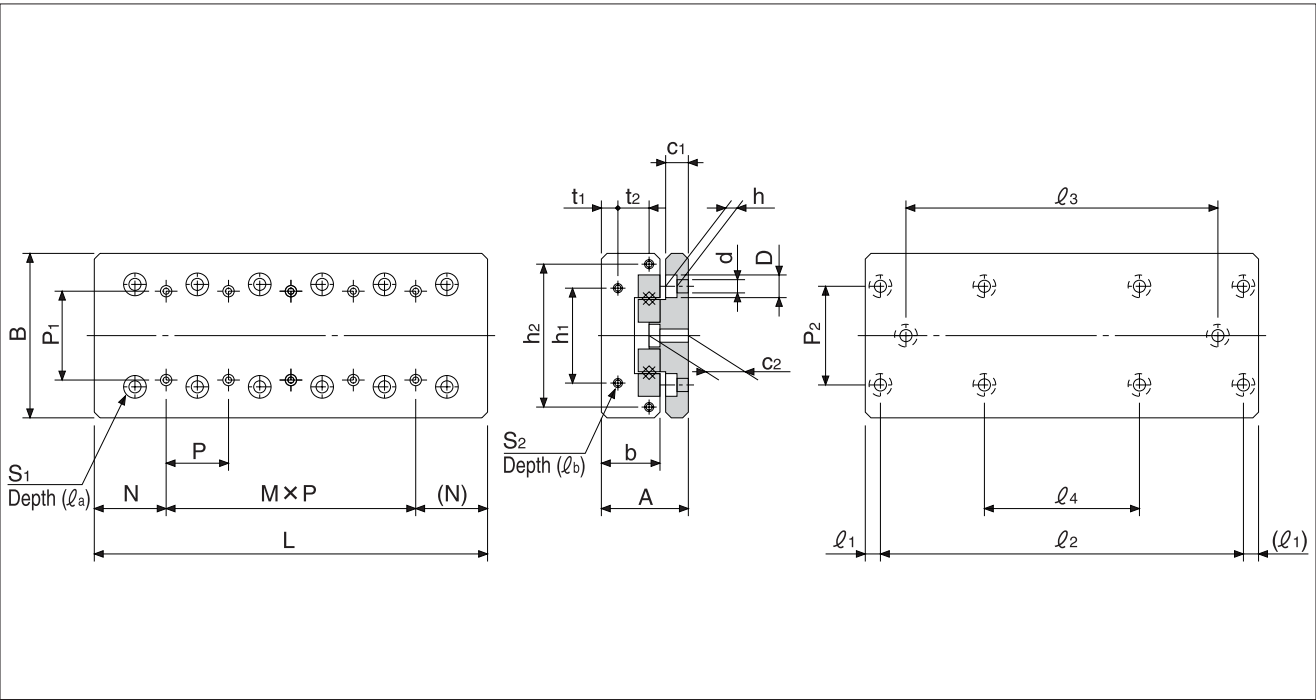

bed-surface mounting-hole dimensions								motion accuracy*		basic load rating			allowable static moment			mass	
P ₂ mm	d×D×h mm	c ₁ mm	c ₂ mm	l ₁ mm	l ₂ mm	l ₃ mm	l ₄ mm	T μm	S μm	C N	Co N	F N	M _P N·m	M _Y N·m	M _R N·m	g	size
40	4.5×8×4.5	9	15	10	35	—	—	2	5	6,150	8,060	2,680	20.0	23.3	55.9	643	3055
					60	—	—	2	5	8,440	12,090	4,030	48.9	54.3	82.8	960	3080
					85	—	—	3	6	12,500	20,150	6,720	107.0	99.7	110.6	1,260	3105
					110	—	—	3	6	14,400	24,190	8,060	166.0	157.1	138.0	1,580	3130
					135	85	—	3	6	16,300	28,220	9,410	204.9	217.2	173.1	1,860	3155
					160	110	—	3	7	18,100	36,280	10,700	326.5	341.9	229.9	2,160	3180
55	5.5×10×5.4	10.5	18	10	185	135	85	3	7	19,800	40,310	12,100	357.2	371.6	231.6	2,460	3205
					65	—	—	2	5	11,680	15,050	5,250	76.2	68.4	125.5	1,710	4085
					105	—	—	3	6	20,050	30,100	10,500	214.6	198.7	257.2	2,520	4125
					145	—	—	3	7	27,500	45,150	15,700	306.7	330.8	377.3	3,320	4165
					185	105	—	3	7	31,010	52,680	18,300	498.7	527.9	476.8	4,130	4205
60	7×11.5×7	13	23	10	225	145	—	3	7	37,710	67,730	23,600	786.3	822.8	613.3	4,930	4245
					90	—	—	3	6	29,660	37,580	12,500	271.9	244.7	414.7	3,300	6110
					140	—	—	3	6	50,950	75,160	18,700	665.6	614.7	740.2	4,850	6160
					190	90	—	3	7	60,640	93,950	31,300	1,097.4	1,033.6	957.9	6,310	6210
					240	140	—	3	7	69,890	112,740	37,500	1,855.0	1,771.3	1,333.0	7,790	6260
					290	190	—	3	7	87,440	150,320	43,800	2,731.7	2,638.8	1,665.0	9,260	6310

*For accuracy T and S, see page H-4.

1kN ≅ 102kgf 1N·m ≅ 0.102kgf·m

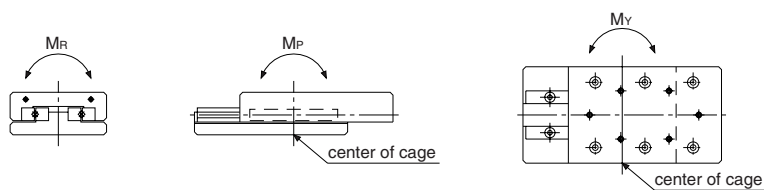

SLIDE WAY

The NB slide way is a non-recirculating linear motion bearing utilizing precision rollers. It is used primarily in optical and measurement equipment where high precision movement is required.

STRUCTURE AND ADVANTAGES

The NB slide way consists of precision ground track bases and caged rollers. Precision rollers are used as the rotating element. Since they do not recirculate, there is less frictional resistance fluctuation. Additionally, there is little or no difference between the static and dynamic frictional resistances.

Suitable for Minute Motion:

Because the frictional resistance is extremely small and there is little or no difference between the static and dynamic frictional resistances, the NB slide way is well suited for minute motion. It can follow minute motion accurately, resulting in highly accurate linear movement.

Low-Speed Stability:

Since the frictional resistance fluctuation is small even under low-load conditions, stable motion is obtained from low to high speeds.

High Rigidity and High Load Capacity:

Since the rollers provide a larger contact area compared with ball elements, there is less elastic deformation. Additionally, since the rollers do not recirculate, the effective number of rotating elements is large, resulting in high rigidity and high load capacity.


Low Noise:

The use of a roller cage prevents noise from being generated by contact between the rotating elements, resulting in quiet operation.


All Stainless Steel Type Available:

The anti-corrosion SVS/SVWS slide ways have all stainless-steel components, making them ideal for use in clean room applications.

Figure H-14 Slide Way Structure

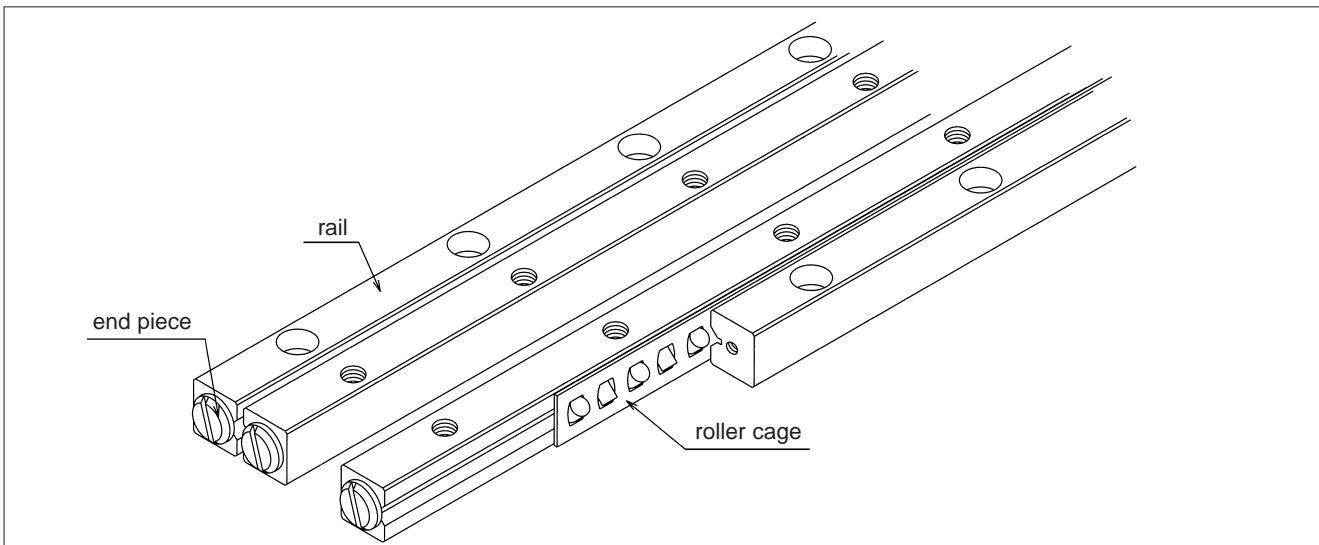


TYPE

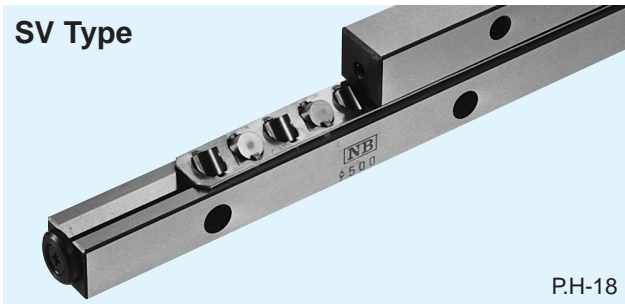SV Type


P.H-18

The SV type slide way consists of two R type roller cages, which have precision rollers in a cross arrangement and four rails having V-shaped raceway surfaces. The all stainless-steel optional feature makes it suitable for use in corrosive environments.

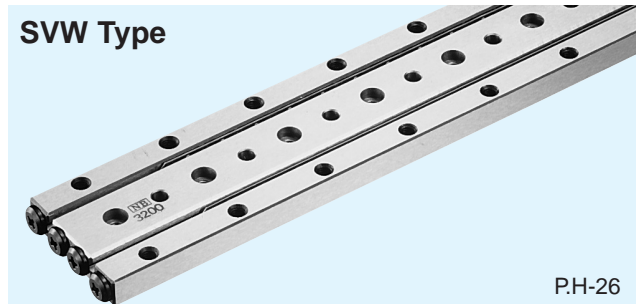SVW Type


P.H-26

The SVW type slide way consists of two R type roller cages, two SV-type rails, and one W type rail with V-shaped grooves on both sides. The use of a W-type rail results in a compact design. The SVWS type is also available with all stainless steel components.

ACCURACY AND RATED LIFE

Accuracy:

The accuracy of a slide way is measured along its entire length, as illustrated in Figure H-16, and expressed in terms of parallelism. It is categorized into three levels: high grade (no suffix), precision grade (P), and ultra precision grade (UP).


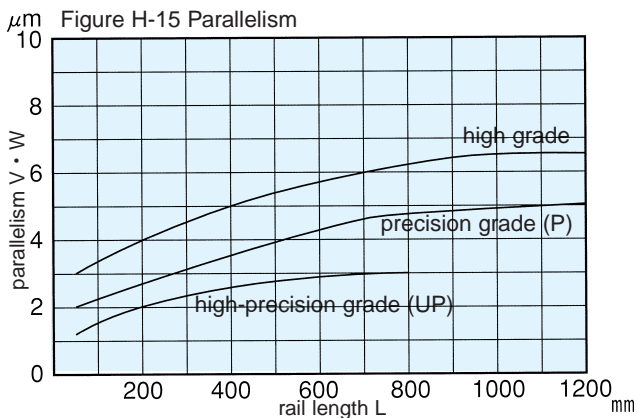


Figure H-16 Accuracy Measurement Method

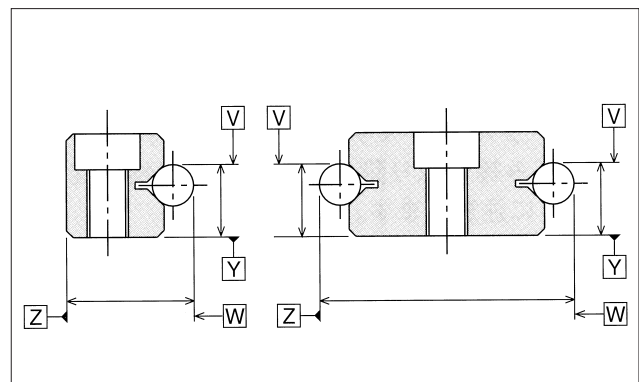

Ultra precision grade is available for size 1-9

Rated Life:

The life of a slide way is calculated using the following equation:

Travel life:

$$L = \left(\frac{f_T}{f_w} \cdot \frac{C}{P} \right)^{10/3} \cdot 50$$

L : travel life (km) f_T : temperature coefficient
 f_w : load coefficient C : basic dynamic rated load (N)
 P : load (N)

※ Refer to page Eng. 5 for coefficients.

Life time:

$$L_H = \frac{L \cdot 10^3}{2 \cdot \ell \cdot s \cdot n_1 \cdot 60}$$

L_H : life time (hr) ℓ s : stroke length (m)
 n_1 : number of strokes per minute (cpm)

MOUNTING

Example:

Figure H-17 SV Type Slide Way


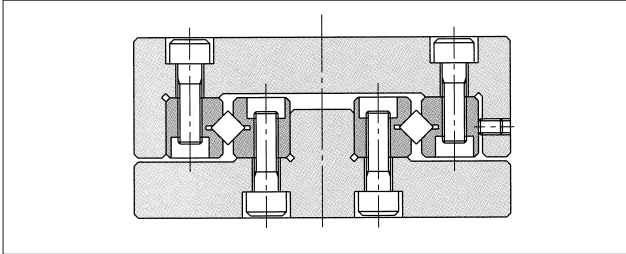


Figure H-18 SVW Type Slide Way

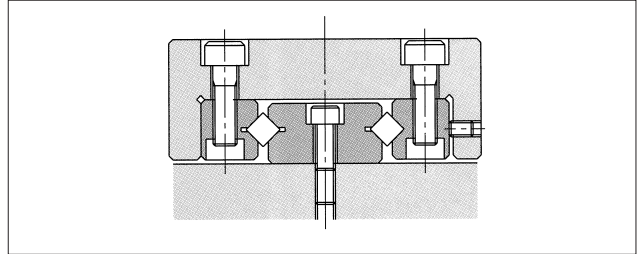


Accuracy:

The accuracy of the mounting surface must be equal to or better than that of the slide way to ensure good performance.

- Parallelism of surface 1 relative to surface A
- Perpendicularity of surface 2 relative to surface A
- Parallelism of surface 3 relative to surface B
- Perpendicularity of surface 4 relative to surface B
- Parallelism of surface 2 relative to surface C
- Parallelism of surface 4 relative to surface C


Figure H-19 Accuracy of Mounting Surfaces

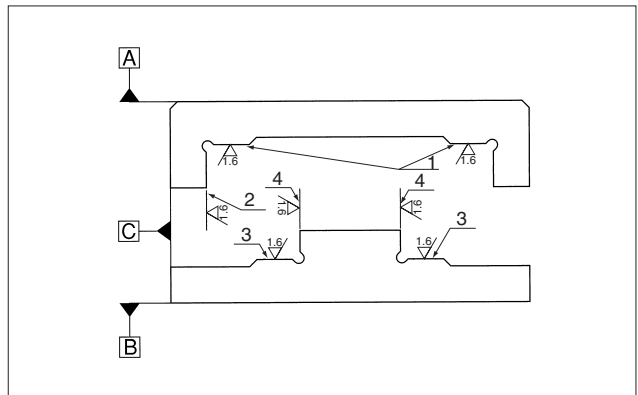

Procedure (refer to Figures H-20 and -21):

- (1) Remove burrs, dirt, dust, etc. from mounting surfaces to prevent contamination during assembly.
- (2) Apply low-viscosity oil to contact surfaces. Attach rail ①-③ by tightening bolts to specified torque values (Table H-6, Figure H-20a).
- (3) Temporarily attach adjustable side of rail ④ (Figure H-20b).
- (4) Remove one end-piece. Carefully insert roller cages between rails (Figure H-20c).
- (5) Re-attach end-pieces.

Figure H-20 Installation Method (1)

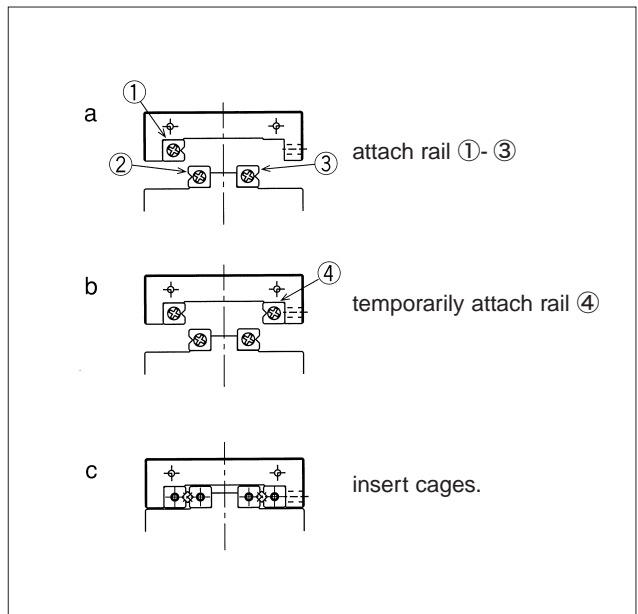

(6) Move table slowly to the right and left (in the direction of the stroke) to position roller cage at the center of the rail.

(7) Set indicators at the center and the side (reference surface) of the table (Figure H-21d).

(8) Move table to one of the stroke ends. Lightly tighten adjustment screw on roller cage (Figure H-21e).

(9) Move table to the other stroke end. Similarly lightly tighten adjustment screw on roller cage (Figure H-21f).

(10) Move table to the center and lightly tighten center adjustment screw (Figure H-21g).

(11) Repeat steps (8) ~ (10) until there is no clearance around the table. When there is no clearance, the indicator will show a minimum fluctuation value when the table is moved to the right and left. Exercise care not to apply an excessive pre-load.

(12) Make final adjustment of pre-load. Repeat steps (8) ~ (10) and tighten the adjustment screws to the torque values listed in Table H-5.

(13) Fix the rail ④. As done for the adjustment screws, tighten the mounting bolts by moving the table.

Figure H-21 Installation Method (2)

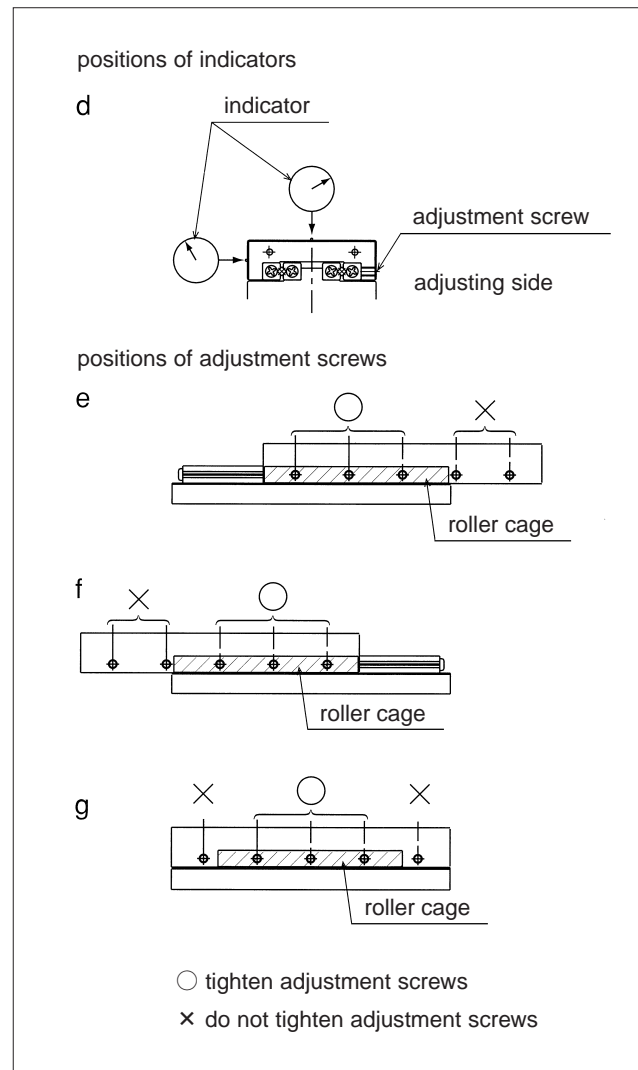


Table H-5 Recommended Torque for Adjustment Screw Unit/N·m

Part Number	Size	Torque
SV1	M2	0.008
SV2	M3	0.012
SV3	M4	0.05
SV4	M4	0.08
SV6	M5	0.20
SV9	M6	0.40

Table H-6 Recommended Torque for Mounting Bolt Unit/N·m

Part number	Size	Torque
SV1	M2	0.4
SV2	M3	1.4
SV3	M4	3.2
SV4	M5	6.6
SV6	M6	11.2
SV9	M8	27.6

SPECIAL BOLT (BT type)

BT type special bolts should be used when using the clearance holes to install a slide way.

Figure H-22 BT type Special Bolt

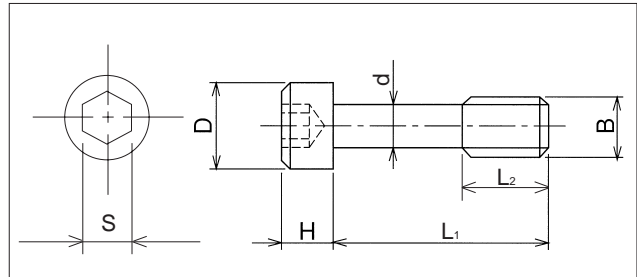


Table H-7 BT type Special Bolt Specifications

Part number	B	d mm	D mm	H mm	L ₁ mm	L ₂ mm	S mm	Applicable tracking base
BT 3	M 3	2.3	5	3	12	5	2.5	SV 3
BT 4	M 4	3.1	5.8	4	15	7	3	SV 4
BT 6	M 5	3.9	8	5	20	8	4	SV 6
BT 9	M 6	4.6	8.5	6	30	12	5	SV 9
BT12	M 8	6.25	11.3	8	40	17	6	SV12

LUBRICATION AND DUST PREVENTION

Lubrication:


NB slide ways are lubricated using lithium soap grease prior to shipment, so they can be used immediately. Periodic application of a similar type grease is recommended depending on the operating conditions.

NB can also provide special grease for low dust generation requirements. Please refer to page Eng-20 for further details.

Dust Prevention:

Dust and dirt can affect the accuracy and life of a slide way. A slide way used in a hostile environment should be protected with a cover (Figure H-23).

Figure H-23 Use of Cover to Prevent Dust

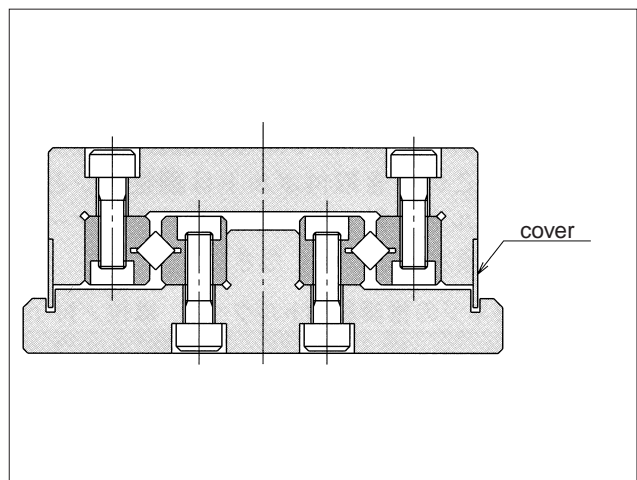

NOTES ON OPERATION

Pre-load Adjustment:

Inaccurate pre-load adjustment may reduce the motion accuracy, resulting in skewing and shortening of slide way life. The pre-load should be adjusted carefully.

Cage Slippage:

When used under high-speed, unbalanced-load, or vibrational conditions, cage slippage may occur. The stroke distance should be determined with sufficient margin, and an excessive pre-load should not be applied.

End Pieces:

End pieces are attached to each end of the slide way to prevent removal of the cage. Do not use them as a mechanical stopper.

Knock Pin Hole:

When using SVW type knock pin holes to attach a slide way, the holes on the mounting surface should be machined after attaching the W type rail. After machining, remove the chips completely and wash as required.

Careful Handling:

Dropping a slide way may result in scratches or dents on the raceway surface, preventing smooth motion and affecting accuracy. Care should be exercised in handling.

Use as a Set:



The accuracy tolerance of a slide way is designed to be adjusted within a particular set of components. If components from different sets are used, accuracy may be affected.

Allowable Load

The allowable load is a load under which the sum of elastic deformation of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. Where very smooth and highly accurate linear motion is required, make sure to use the product within the allowable load values.

SV TYPE

— SV1/SV2 —

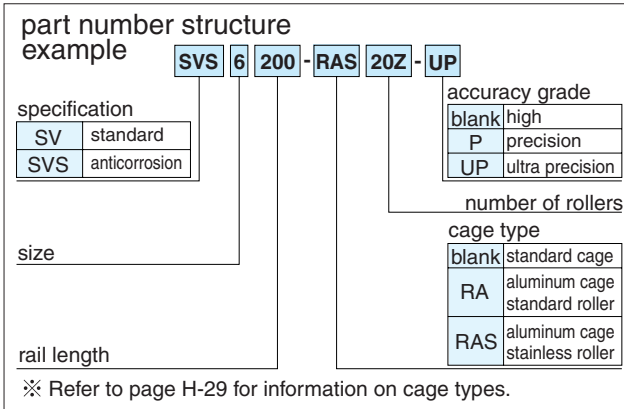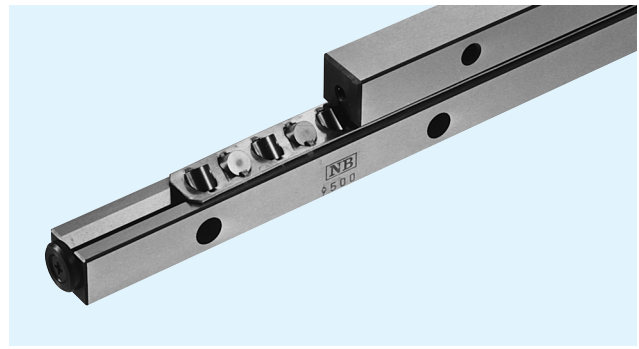


part number		stroke mm	roller diameter D mm	number of rollers Z	L	A	B	C
standard	anticorrosion				mm	mm	mm	mm
SV1020-5Z	SVS1020-5Z	12	1.5	5	20	8.5	4	3.8
1030-7Z	1030-7Z	20		7	30			
1040-10Z	1040-10Z	27		10	40			
1050-13Z	1050-13Z	32		13	50			
1060-16Z	1060-16Z	37		16	60			
1070-19Z	1070-19Z	42		19	70			
1080-21Z	1080-21Z	50		21	80			
SV2030-5Z	SVS2030-5Z	18		2	5			
2045-8Z	2045-8Z	24	8		45			
2060-11Z	2060-11Z	30	11		60			
2075-13Z	2075-13Z	44	13		75			
2090-16Z	2090-16Z	50	16		90			
2105-18Z	2105-18Z	64	18		105			
2120-21Z	2120-21Z	70	21		120			
2135-23Z	2135-23Z	84	23		135			
2150-26Z	2150-26Z	90	26		150			
2165-29Z	2165-29Z	95	29		165			
2180-32Z	2180-32Z	100	32		180			

Maximum Rail Length (SV type only)

part number	Max.length
SV1	200mm
SV2	450mm

Please contact NB for further details.


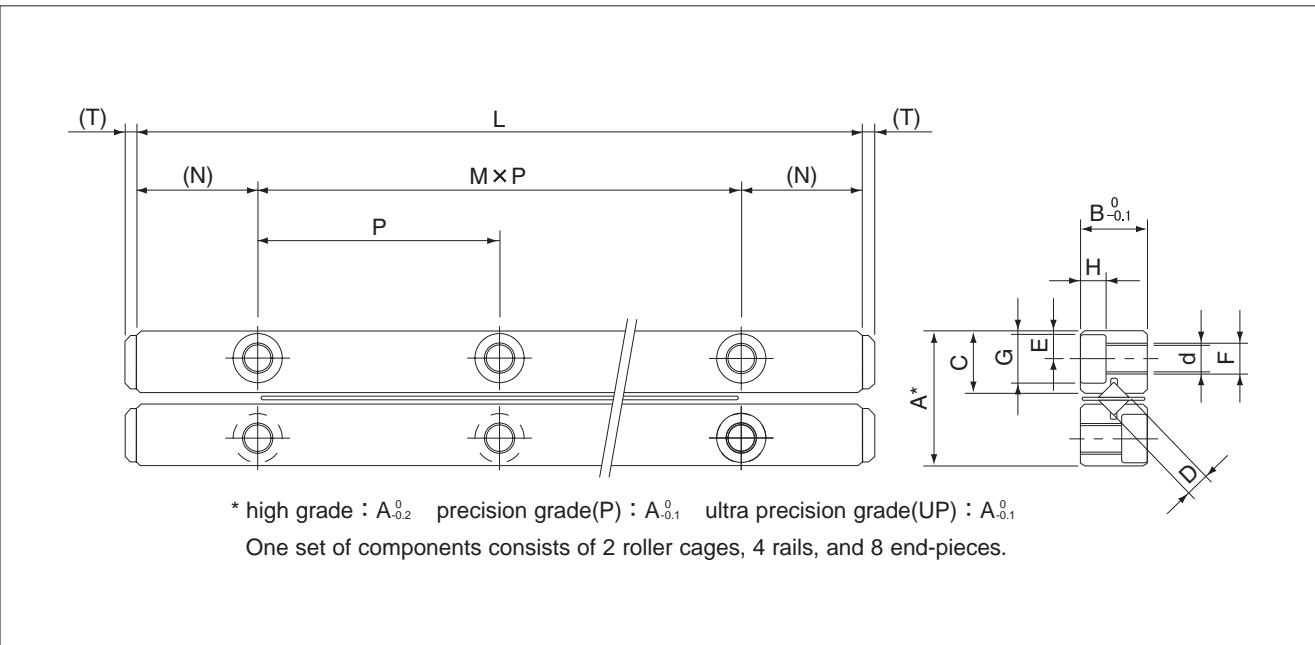


major dimensions								basic load rating		allowable	mass	size
M×P	N	E	F	d	G	H	T	dynamic C	static Co	load F	g	
mm	mm	mm		mm	mm	mm	mm	N	N	N		
1×10								464	476	158	11	1020
2×10								641	714	237	14	1030
3×10								959	1,190	396	18	1040
4×10	5	1.8	M2	1.65	3	1.4	0.8	1,100	1,420	475	22	1050
5×10								1,380	1,900	633	26	1060
6×10								1,510	2,140	712	30	1070
7×10								1,650	2,380	792	34	1080
1×15								1,090	1,170	390	28	2030
2×15								1,900	2,340	780	42	2045
3×15								2,270	2,930	976	55	2060
4×15								2,620	3,510	1,170	69	2075
5×15								3,280	4,680	1,560	83	2090
6×15	7.5	2.5	M3	2.55	4.4	2	2	3,590	5,270	1,750	96	2105
7×15								3,900	5,860	1,950	110	2120
8×15								4,210	6,440	2,140	123	2135
9×15								4,790	7,610	2,530	137	2150
10×15								5,080	8,200	2,730	151	2165
11×15								5,640	9,370	3,120	165	2180

1N≐0.102kgf

SV TYPE

— SV3/SV4 —

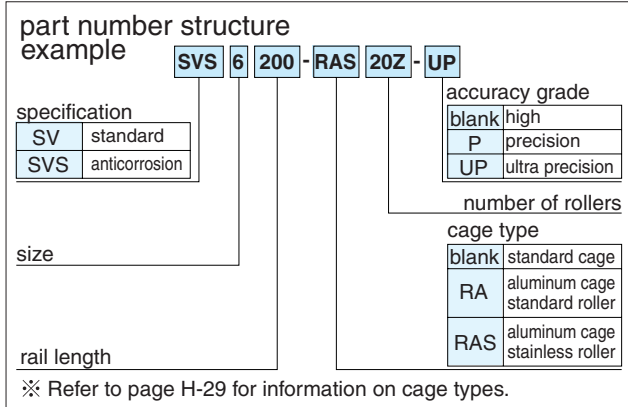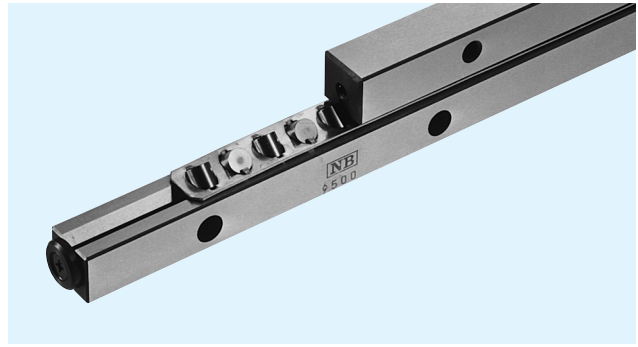


part number		stroke mm	roller diameter D mm	number of rollers Z	L	A	B	C
standard	anticorrosion				mm	mm	mm	mm
SV3050-7Z	SVS3050-7Z	28	3	7	50	18	8	8.3
3075-10Z	3075-10Z	48		10	75			
3100-14Z	3100-14Z	58		14	100			
3125-17Z	3125-17Z	78		17	125			
3150-21Z	3150-21Z	88		21	150			
3175-24Z	3175-24Z	105		24	175			
3200-28Z	3200-28Z	115		28	200			
3225-31Z	3225-31Z	135		31	225			
3250-35Z	3250-35Z	145		35	250			
3275-38Z	3275-38Z	165		38	275			
3300-42Z	3300-42Z	175		42	300			
3325-45Z	3325-45Z	195		45	325			
3350-49Z	3350-49Z	205		49	350			
SV4080-7Z	SVS4080-7Z	58	4	7	80	22	11	10.2
4120-11Z	4120-11Z	82		11	120			
4160-15Z	4160-15Z	105		15	160			
4200-19Z	4200-19Z	130		19	200			
4240-23Z	4240-23Z	150		23	240			
4280-27Z	4280-27Z	175		27	280			
4320-31Z	4320-31Z	200		31	320			
4360-35Z	4360-35Z	225		35	360			
4400-39Z	4400-39Z	250		39	400			
4440-43Z	4440-43Z	270		43	440			
4480-47Z	4480-47Z	295		47	480			

Maximum Rail Length (SV type only)

part number	Max.length
SV3	700mm
SV4	700mm

Please contact NB for further details.


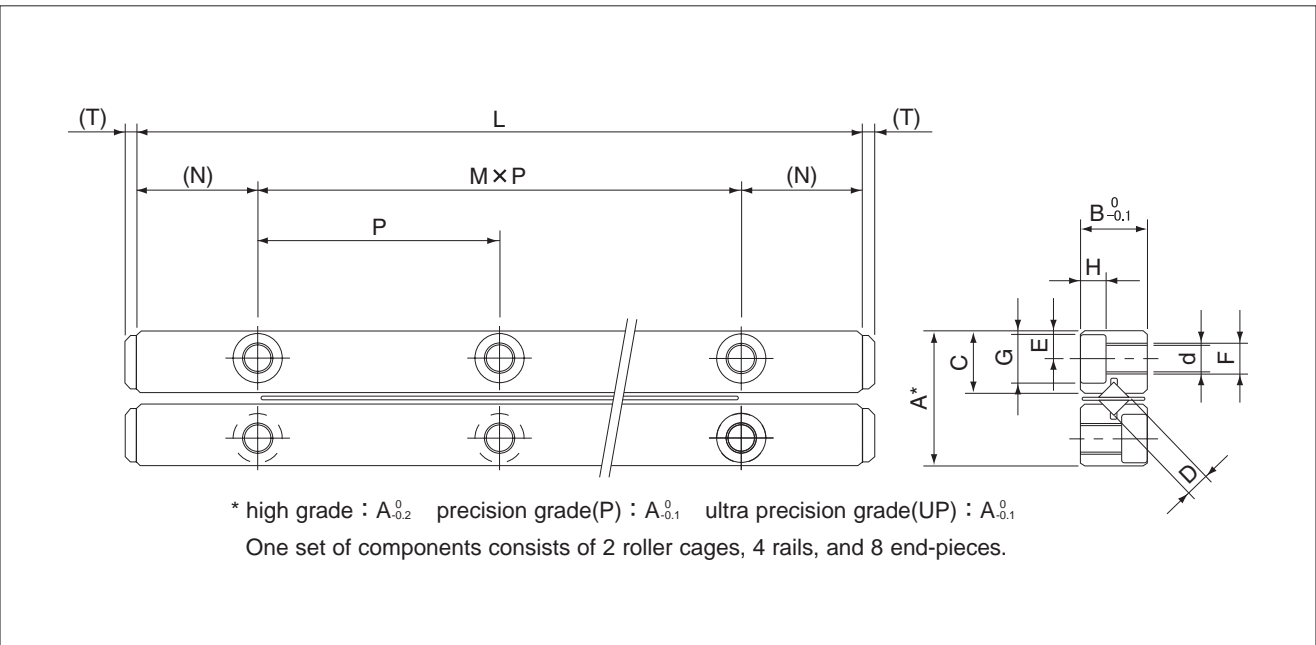


major dimensions								basic load rating		allowable load F N	mass g	size
M×P mm	N mm	E mm	F	d mm	G mm	H mm	T mm	dynamic C N	static Co N			
1×25								3,490	3,890	1,290	94	3050
2×25								5,230	6,490	2,160	135	3075
3×25								6,810	9,080	3,020	187	3100
4×25								7,560	10,300	3,450	234	3125
5×25								9,000	12,900	4,320	281	3150
6×25								10,300	15,500	5,180	327	3175
7×25	12.5	3.5	M4	3.3	6	3.1	2	11,700	18,100	6,040	374	3200
8×25								12,300	19,400	6,480	421	3225
9×25								13,600	22,000	7,340	468	3250
10×25								14,800	24,600	8,200	514	3275
11×25								16,000	27,200	9,070	561	3300
12×25								16,600	28,500	9,500	608	3325
13×25								17,800	31,100	10,300	655	3350
1×40								7,110	7,920	2,640	255	4080
2×40								10,600	13,200	4,400	385	4120
3×40								13,800	18,400	6,160	510	4160
4×40								16,800	23,700	7,920	635	4200
5×40								19,700	29,000	9,680	770	4240
6×40	20	4.5	M5	4.3	8	4.2	2	22,400	34,300	11,400	905	4280
7×40								25,100	39,600	13,200	1,020	4320
8×40								27,600	44,800	14,900	1,160	4360
9×40								30,200	50,100	16,700	1,280	4400
10×40								32,600	55,400	18,400	1,410	4440
11×40								35,000	60,700	20,200	1,540	4480

1N≒0.102kgf

SV TYPE

— SV6/SV9 —

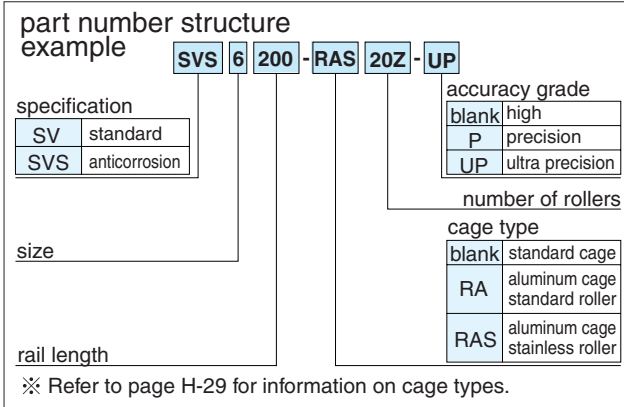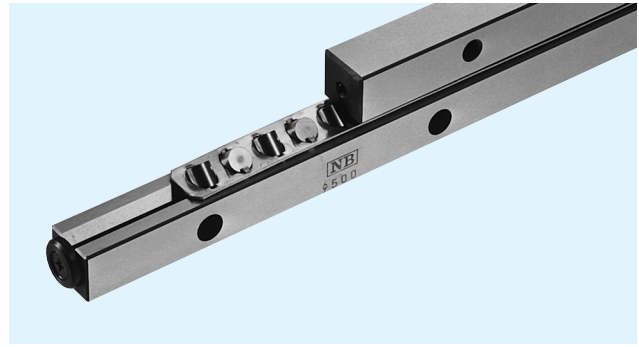


part number		stroke mm	roller diameter D mm	number of rollers Z	L	A	B	C
standard	anticorrosion				mm	mm	mm	mm
SV6100-8Z	SVS6100-8Z	55	6	8	100	31	15	14.2
6150-12Z	6150-12Z	85		12	150			
6200-16Z	6200-16Z	120		16	200			
6250-20Z	6250-20Z	150		20	250			
6300-24Z	6300-24Z	185		24	300			
6350-28Z	6350-28Z	215		28	350			
6400-32Z	6400-32Z	245		32	400			
6450-36Z	6450-36Z	280		36	450			
6500-40Z	6500-40Z	310		40	500			
6600-49Z	6600-49Z	360		49	600			
SV9200-10Z	—	115		9	10			
9300-15Z	—	175	15		300			
9400-20Z	—	235	20		400			
9500-25Z	—	295	25		500			
9600-30Z	—	355	30		600			
9700-35Z	—	415	35		700			
9800-40Z	—	475	40		800			
9900-45Z	—	535	45		900			
91000-50Z	—	595	50		1,000			

Maximum Rail Length (SV type only)

part number	Max.length
SV6	1000mm

Please contact NB for further details.

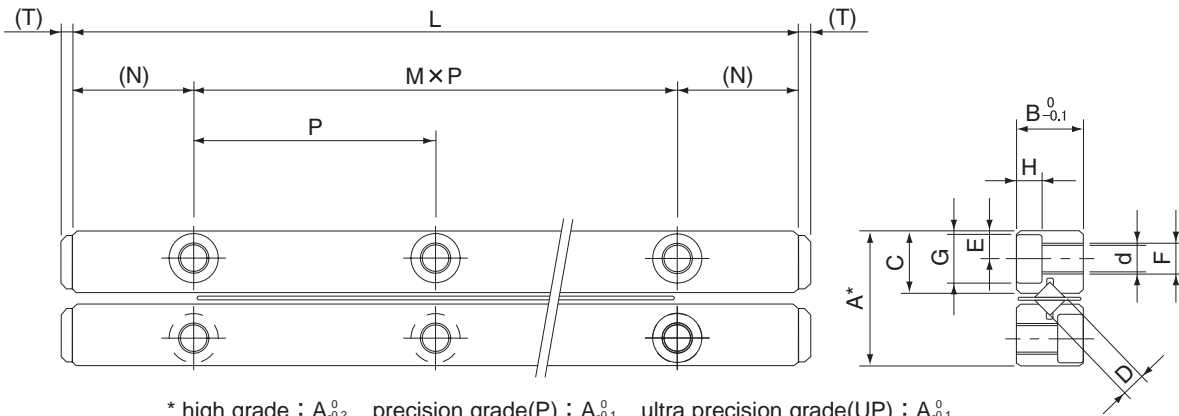

* high grade : $A_{0.2}$ precision grade(P) : $A_{0.1}$ ultra precision grade(UP) : $A_{0.1}$



One set of components consists of 2 roller cages, 4 rails, and 8 end-pieces.

major dimensions								basic load rating		allowable	mass	size
M×P	N	E	F	d	G	H	T	dynamic C	static Co	load F	g	
mm	mm	mm		mm	mm	mm	mm	N	N	N		
1×50								20,700	23,600	7,880	628	6100
2×50								28,500	35,500	11,800	942	6150
3×50								35,700	47,300	15,700	1,260	6200
4×50								42,500	59,200	19,700	1,570	6250
5×50	25	6	M6	5.2	9.5	5.2	3	49,000	71,000	13,600	1,880	6300
6×50								55,300	82,800	27,600	2,200	6350
7×50								61,400	94,700	31,500	2,510	6400
8×50								67,300	106,000	35,400	2,830	6450
9×50								73,100	118,000	39,400	3,140	6500
11×50								84,200	142,000	47,300	3,770	6600
1×100								60,900	70,700	23,500	2,720	9200
2×100								79,300	98,900	32,900	4,030	9300
3×100								104,000	141,000	47,000	5,380	9400
4×100								120,000	169,000	56,400	6,700	9500
5×100	50	9	M8	6.8	10.5	6.2	4	143,000	212,000	70,500	8,050	9600
6×100								158,000	240,000	79,900	9,230	9700
7×100								180,000	282,000	94,000	10,500	9800
8×100								193,000	311,000	103,000	11,900	9900
9×100								214,000	353,000	117,000	13,000	91000


1N≒0.102kgf

SV TYPE

— SV12 —

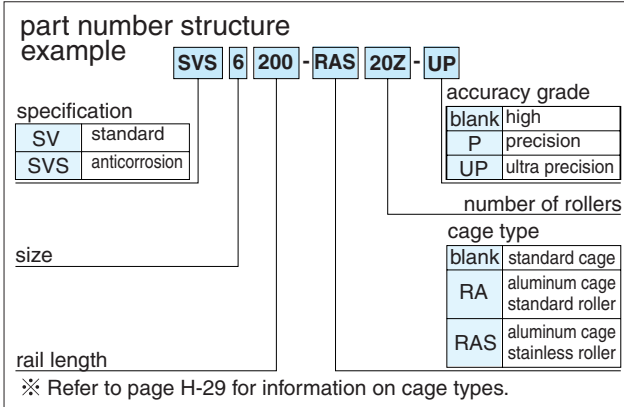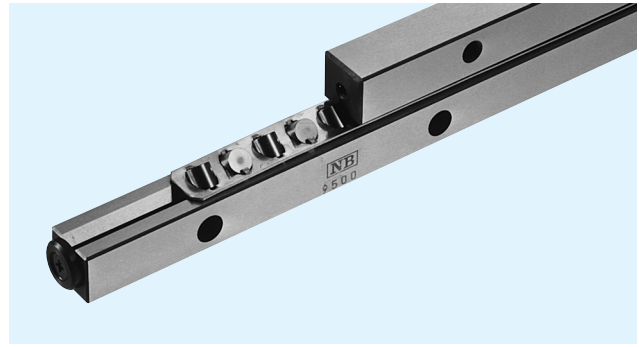



part number		stroke mm	roller diameter D mm	number of rollers Z	L	A	B	C
standard	anticorrosion				mm	mm	mm	mm
SV12300-10Z	—	200	12	10	300	58	28	27
12400-14Z	—	240		14	400			
12500-17Z	—	320		17	500			
12600-21Z	—	360		21	600			
12700-24Z	—	440		24	700			
12800-28Z	—	480		28	800			
12900-31Z	—	560		31	900			
121000-34Z	—	640		34	1,000			
121100-38Z	—	680		38	1,100			
121200-42Z	—	720		42	1,200			

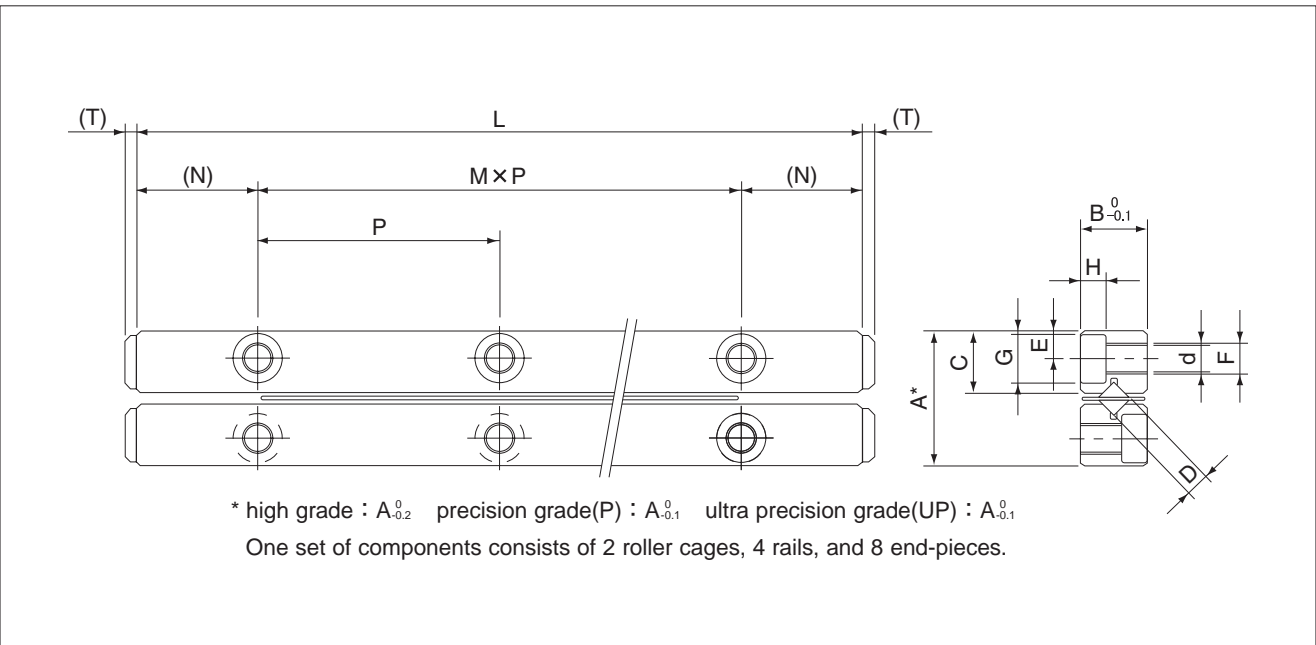


major dimensions								basic load rating		allowable	mass	size
M×P	N	E	F	d	G	H	T	dynamic C N	static Co N	load F N	g	
mm	mm	mm		mm	mm	mm	mm					
2×100								124,000	145,000	48,300	6,880	12300
3×100								162,000	203,000	67,600	9,090	12400
4×100								180,000	232,000	77,200	11,400	12500
5×100								214,000	290,000	96,600	13,700	12600
6×100	50	12	M10	8.5	13.5	8.2	4	247,000	348,000	115,000	15,800	12700
7×100								279,000	406,000	135,000	18,200	12800
8×100								294,000	435,000	144,000	20,500	12900
9×100								324,000	493,000	164,000	22,800	121000
10×100								354,000	551,000	183,000	25,000	121100
11×100								382,000	609,000	202,000	27,300	121200

1N≐0.102kgf

SVW TYPE

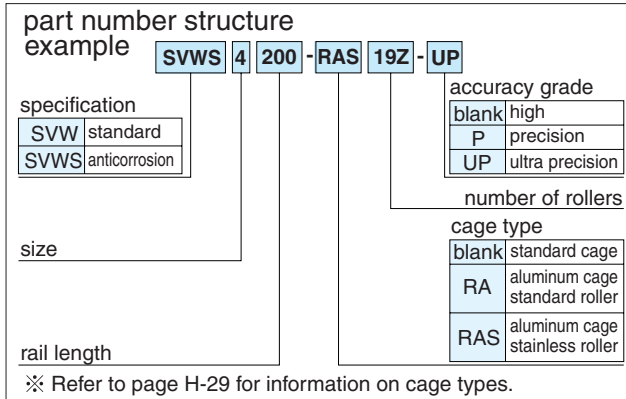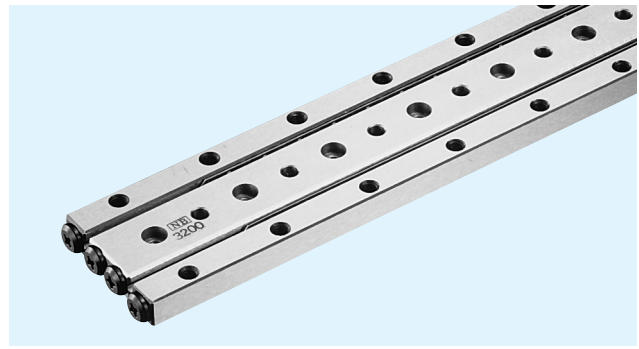

part number		stroke mm	roller diameter D mm	number of rollers Z	L mm	A mm	t mm	B ₁ mm	B ₂ mm	C mm	P ₁ mm	M ₁ ×P ₂ mm
standard	anticorrosion											
SVW1020- 5Z	SVWS1020- 5Z	12		5	20							1×10
1030- 7Z	1030- 7Z	20		7	30							2×10
1040-10Z	1040-10Z	27		10	40							3×10
1050-13Z	1050-13Z	32	1.5	13	50	4.5	0.5	17	7.6	3.8	13.4	4×10
1060-16Z	1060-16Z	37		16	60							5×10
1070-19Z	1070-19Z	42		19	70							6×10
1080-21Z	1080-21Z	50		21	80							7×10
SVW2030- 5Z	SVWS2030- 5Z	18		5	30							1×15
2045- 8Z	2045- 8Z	24		8	45							2×15
2060-11Z	2060-11Z	30		11	60							3×15
2075-13Z	2075-13Z	44	2	13	75	6.5	0.5	24	11	5.5	19	4×15
2090-16Z	2090-16Z	50		16	90							5×15
2105-18Z	2105-18Z	64		18	105							6×15
2120-21Z	2120-21Z	70		21	120							7×15
SVW3050- 7Z	SVWS3050- 7Z	28		7	50							1×25
3075-10Z	3075-10Z	48		10	75							2×25
3100-14Z	3100-14Z	58		14	100							3×25
3125-17Z	3125-17Z	78	3	17	125	8.5	0.5	36	16.6	8.3	29	4×25
3150-21Z	3150-21Z	88		21	150							5×25
3175-24Z	3175-24Z	105		24	175							6×25
3200-28Z	3200-28Z	115		28	200							7×25
SVW4080- 7Z	SVWS4080- 7Z	58		7	80							1×40
4120-11Z	4120-11Z	82		11	120							2×40
4160-15Z	4160-15Z	105	4	15	160	11.5	0.5	44	20.4	10.2	35	3×40
4200-19Z	4200-19Z	130		19	200							4×40
4240-23Z	4240-23Z	150		23	240							5×40
4280-27Z	4280-27Z	175		27	280							6×40

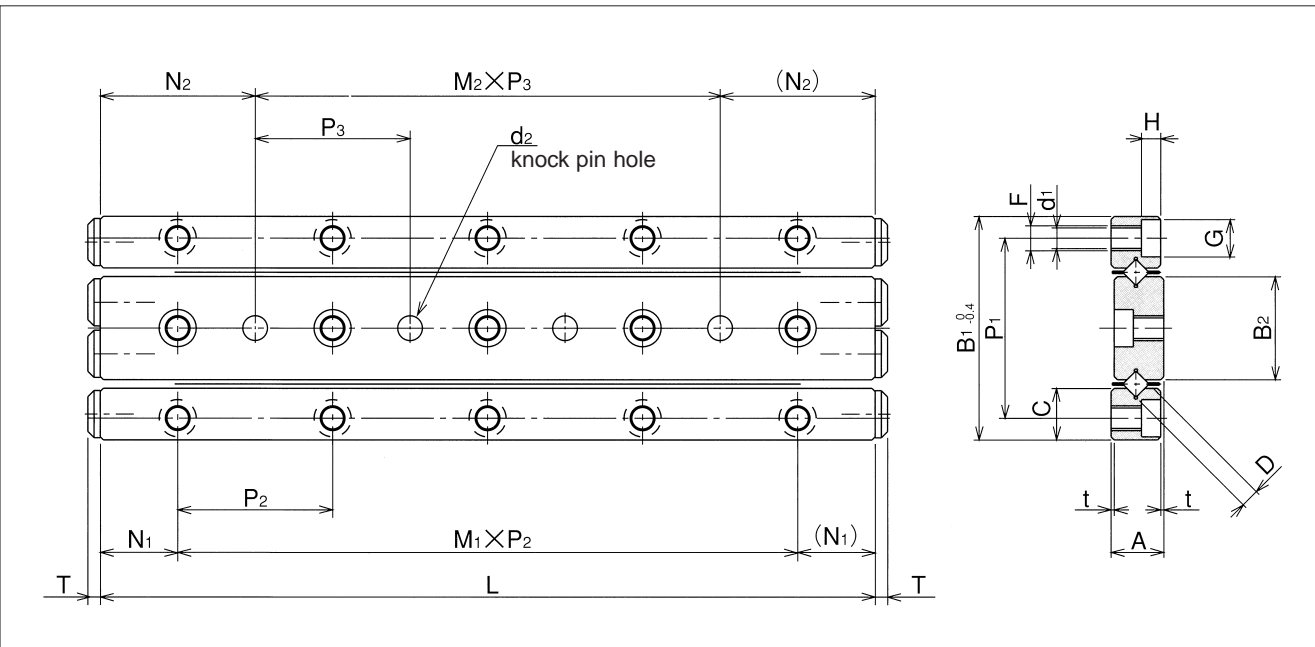

major dimensions									basic load rating		allowable load F N	mass g	size
N ₁ mm	F	d ₁ mm	G mm	H mm	M ₂ ×P ₃ mm	N ₂ mm	d ₂ mm	T mm	dynamic C N	static C ₀ N			
5	M2	1.65	3	1.4	—	10	2	1	464	476	158	11	1020
					1×10				641	714	237	14	1030
					2×10				959	1,190	396	18	1040
					3×10				1,100	1,420	475	22	1050
					4×10				1,380	1,900	633	26	1060
					5×10				1,510	2,140	712	30	1070
7.5	M3	2.55	4.4	2	—	15	3	2	1,090	1,170	390	28	2030
					1×15				1,900	2,340	780	42	2045
					2×15				2,270	2,930	976	55	2060
					3×15				2,620	3,510	1,170	69	2075
					4×15				3,280	4,680	1,560	83	2090
					5×15				3,590	5,270	1,750	96	2105
12.5	M4	3.3	6	3.1	—	25	4	2	3,490	3,890	1,290	94	3050
					1×25				5,230	6,490	2,160	135	3075
					2×25				6,810	9,080	3,020	187	3100
					3×25				7,560	10,300	3,450	234	3125
					4×25				9,000	12,900	4,320	281	3150
					5×25				10,300	15,500	5,180	327	3175
20	M5	4.3	8	4.2	—	40	5	2	7,110	7,920	2,640	255	4080
					1×40				10,600	13,200	4,400	385	4120
					2×40				13,800	18,400	6,160	510	4160
					3×40				16,800	23,700	7,920	635	4200
					4×40				19,700	29,000	9,680	770	4240
					5×40				22,400	34,300	11,400	905	4280

1N≒0.102kgf

STROKE AND RATED LOAD

When the stroke is changed, the new stroke distance must be determined and the rated load must be re-estimated as follows.

Stroke:

When the slide way moves along the tracking base, the cage moves half the distance traveled by the slide way in the same direction. Therefore, although the applied load may be fixed on the table, the distance between the load center and cage center will change. To achieve stable accuracy, determine the stroke distance and length of the tracking base as follows:

Rail length (L)

When the stroke is 400mm or over


$$S \leq L / 1.5$$

When the stroke is less than 400 mm,

$$S \leq L$$

S : stroke (mm) L : rail length (mm)

Figure H-24 Travel Distance

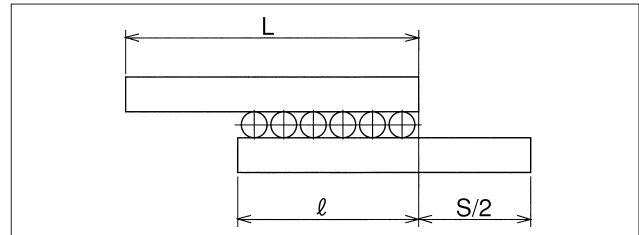

Cage length (l)

$$l \leq L - \frac{S}{2}$$

Number of rollers (Z)

$$Z = \frac{l - 2a}{p} + 1$$

a, P : Refer to roller cage dimensions (Page H-29)

Allowable Load

The allowable load is a load under which the sum of elastic deformation of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. Where very smooth and highly accurate liner motion is required, make sure to use the product within the allowable load values.

Rated Load:

The rated load for the slide way is obtained using the equations listed in Table H-8.



Table H-8 Rated Load

condition	single-rail usage	single-rail vertical usage	double-rail parallel usage
direction of load			
basic dynamic load rating C	$C = \left(\frac{Z}{2}\right)^{3/4} \cdot C_1$	$C = \left(\frac{Z}{2}\right)^{3/4} \cdot C_1 \cdot 2^{7/9}$	
basic static load rating Co	$Co = \frac{Z}{2} \cdot Co_1$	$Co = \frac{Z}{2} \cdot Co_1 \cdot 2$	
allowable load F	$F = \frac{Z}{2} \cdot F_1$	$F = \frac{Z}{2} \cdot F_1 \cdot 2$	

C : basic dynamic load rating (N) Co : basic static load rating (N) F : allowable load (N) C₁ : basic dynamic load rating per roller (N)
Co₁ : basic static load rating per roller (N) F₁ : allowable load per roller (N) Z : number of rollers per cage
Z / 2 : effective roller number (round down to whole number)

R/RS TYPE

— Roller Cage —

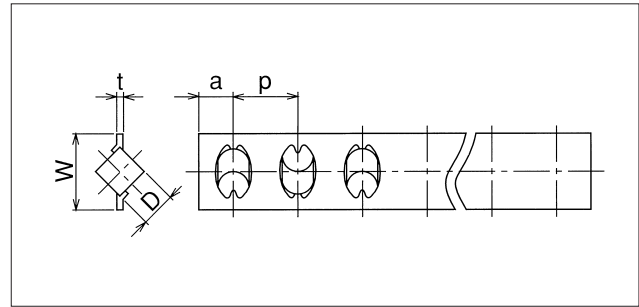
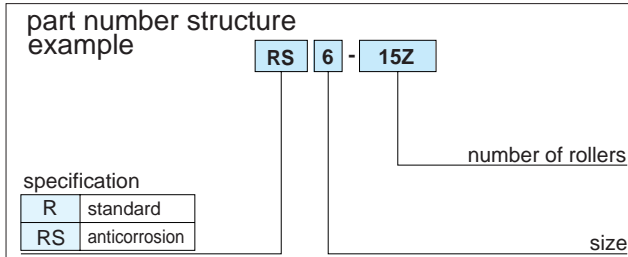


part number		D mm	t mm	W mm	p mm	a mm	C ₁ N	Co ₁ N	F ₁ N
standard	anticorrosion								
R 1	RS1	1.5	0.2	3.8	2.5	2	154	119	39.8
R 2	RS2	2	0.3	5.6	4	2.5	360	293	97.8
R 3	RS3	3	0.4	7.6	5	3	824	649	216
R 4	RS4	4	0.4	10.4	7	4.5	1,660	1,320	442
R 6	RS6	6	0.7	14	8.5	5.5	3,840	2,690	987
R 9	—	9	0.7	19	14	7.5	9,330	7,070	2,350
R12	—	12	1.0	25	20	10	18,900	14,500	4,840

cage material : stainless steel C₁ : dynamic load rating per roller Co₁ : static load rating per roller F₁ : allowable load per roller (N)

RA/RAS TYPE

— Aluminum Roller Cage —

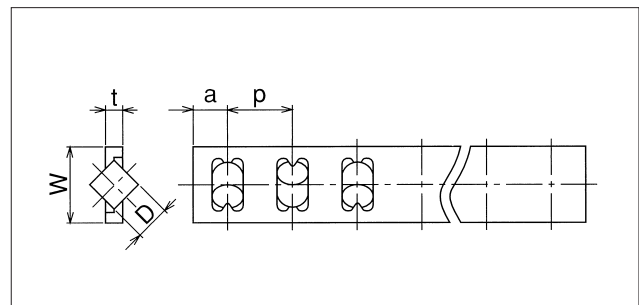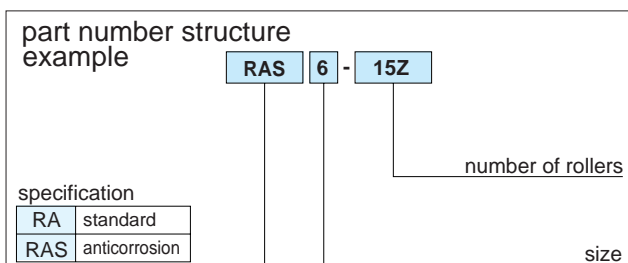

part number		D mm	t mm	W mm	p mm	a mm	C ₁ N	Co ₁ N	F ₁ N
standard	anticorrosion								
RA3	RAS3	3	1.2	7.6	5	3	824	649	216
RA4	RAS4	4	1.4	10.4	7	4.5	1,660	1,320	442
RA6	RAS6	6	2.1	14	8.5	5.5	3,840	2,960	987
RA9	—	9	3.0	20	14	7.5	9,330	7,070	2,350

cage material : aluminum C₁ : dynamic load rating per roller Co₁ : static load rating per roller F₁ : allowable load per roller (N)

SLIDE TABLE

The NB slide table is a precision table equipped with a slide way. Its high-precision and low-friction characteristics make it well suited for use in electronics automatic-assembly machines and optical measurement devices.

STRUCTURE AND ADVANTAGES

The NB slide table consists of a slide way sandwiched between an accurately machined table and a bed. Stopper is provided within the table.

High Accuracy:

The mounting surfaces of the table and bed are precision finished to ensure high-precision linear motion, resulting in a high-performance slide way.

Low Friction:

Its non-recirculating mechanism provides stable motion from low to high speeds.

Compact and High Rigidity:

Being designed compactly, the NB slide table holds the high load capacity and high-rigidity characteristics.


No Need for Adjustment:

The table is carefully assembled so that the accuracy and pre-load are optimized, so it can be used immediately without any further adjustment.

Ease of Mounting:


Standardized mounting holes are provided in the table and bed. High-precision linear motion can be achieved simply by mounting.

Figure H-25 Structure of SVT Type Slide Table

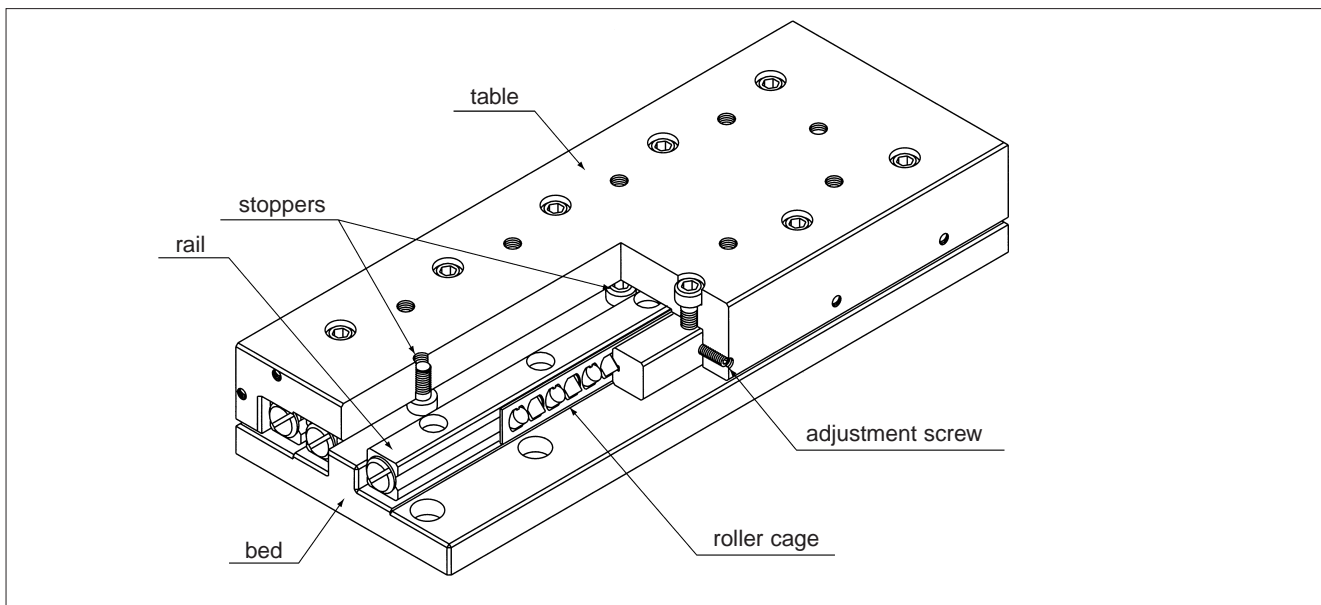

TYPE


SVT·SVTS Type

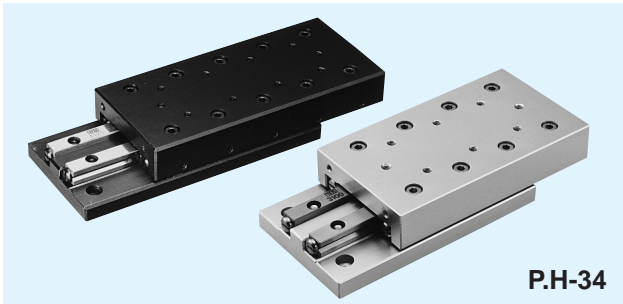

P.H-34

In the SVT type slide table, the slide way is sandwiched between an accurately machined steel tabletop and bed. In the SVTS type, an anti-corrosion SVS type slide way is sandwiched between an accurately machined aluminum tabletop and bed.

SYT·SYTS Type

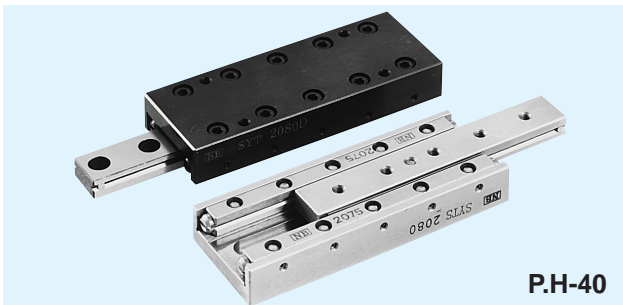


P.H-40

The SYT/SYTS type is a thin, compact slide table. Either tapped or counterbore type is available. The anti-corrosion SYTS type slide table is fabricated with all stainless steel components, making it suitable for use in clean rooms.

ACCURACY

The motion accuracy of a slide table is measured by placing indicators at the centers of the top and side surfaces of the table, as illustrated in Figure H-26. It is expressed in terms of the indicator deflections when the table is moved to the right and left under no-load conditions.

Figure H-26 Accuracy Measurement Method

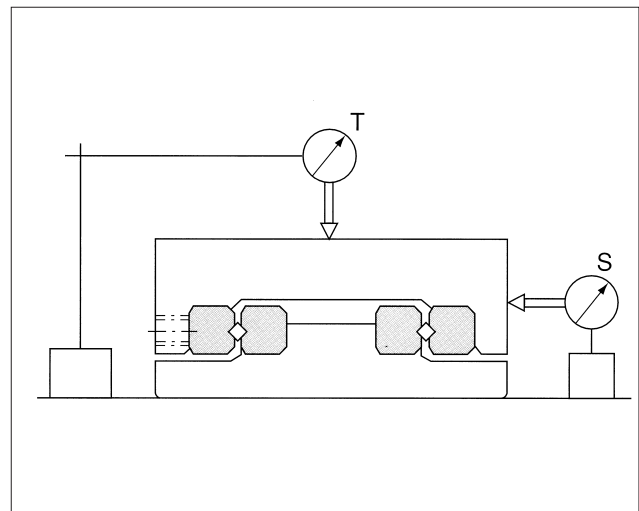

RATED LIFE

The life of an NB slide table is calculated using the following equations.

Travel life :

$$L = \left(\frac{f_T \cdot C}{f_W \cdot P} \right)^{10/3} \cdot 50$$

L : travel life (km) f_T : temperature coefficient
 f_W : load coefficient
 ※ Refer to page Eng. 5 for the coefficients.

Life time :

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell \cdot s \cdot n_1 \cdot 60}$$

L_h : life time (hr) ℓ : stroke length (m)
 n_1 : number of strokes per minute (cpm)

NOTES ON OPERATION

Careful Handling:

Dropping a table may result in scratches or dents on the raceway surface, preventing smooth motion and reducing the life. Care should be exercised when handling a table.

Dust Prevention:

Dust and foreign particles can affect the accuracy and lifetime of a slide table. A slide table used in a hostile environment should be protected with a cover.

Lubrication:

Lithium soap lubrication is applied prior to shipment, so a table can be used immediately upon delivery. Periodic application of a similar lubricant should be necessary depending on the operating conditions.

Cage Slippage:

The cage can slip under high-speed motion, unbalanced-loading, and vibrating conditions. The motion speed of a slide table should be kept under 30 m/min.

Adjustment/Installation Screws:


The NB slide table is adjusted to achieve optimum accuracy and pre-load. The adjustment screw and tracking-bed installation screws should not be changed.

Allowable Load

The allowable load is a load under which the sum of elastic deformations of the rolling element and the raceways in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. Where very smooth and highly accurate liner motion is required, make sure to use the product within the allowable load values.



SPECIAL REQUIREMENTS

NB can fabricate tables to meet special requirements, including tables with a micrometer head and tables for projectors. Contact NB for further information.

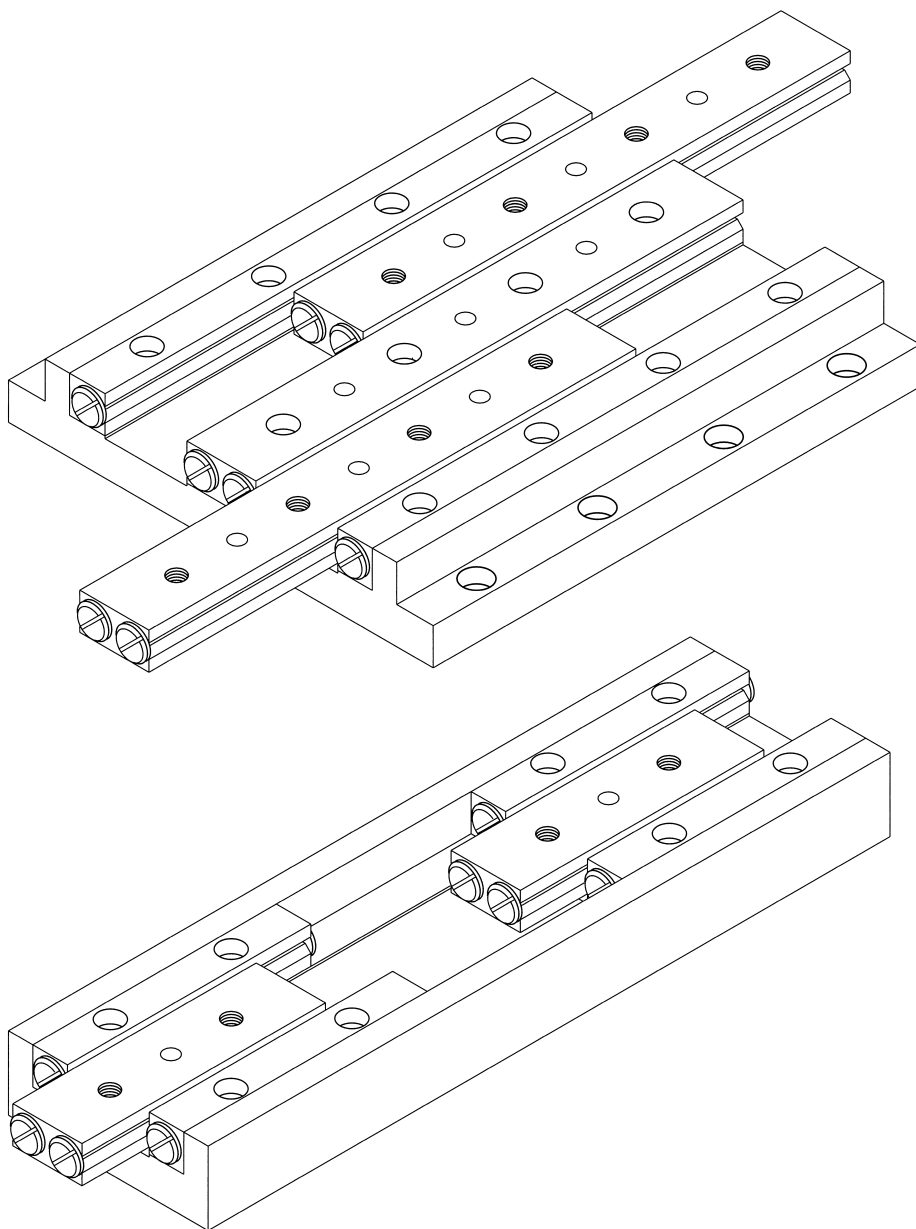


SVT TYPE

— SVT1/SVT2 —

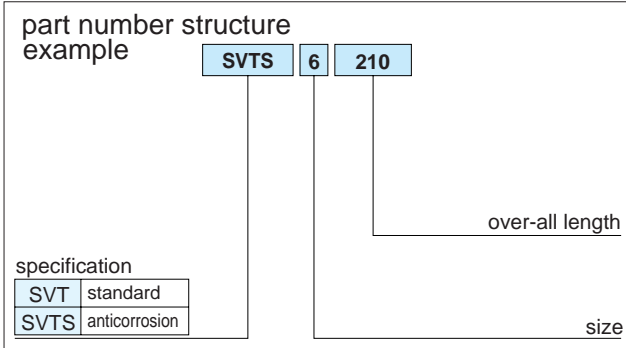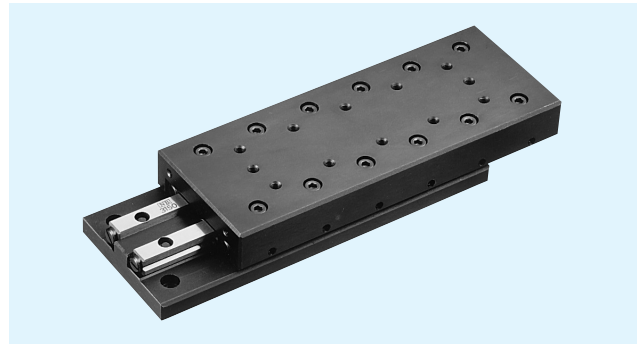


part number		stroke mm	major dimensions				table-top mounting-hole dimensions					table-end mounting-hole dimensions						
standard	anticorrosion		A mm	B mm	L mm	b mm	P ₁ mm	S ₁	ℓ _a mm	N mm	M×P mm	h ₁ mm	h ₂ mm	t ₁ mm	t ₂ mm	S ₂	ℓ _b mm	P ₂ mm
SVT1025	SVTS1025	12			25					—								
1035	1035	18			35					1×10								
1045	1045	25			45					2×10								
1055	1055	32	17 ^{±0.1}	30 ^{-0.2/-0.4}	55	11	10	M2	4	12.5	3×10	12	—	2.5	—	M2	6	22
1065	1065	40			65						4×10							
1075	1075	45			75						5×10							
1085	1085	50			85						6×10							
SVT2035	SVTS2035	18			35					—								
2050	2050	30			50					1×15								
2065	2065	40			65					2×15								
2080	2080	50			80					3×15								
2095	2095	60			95					4×15								
2110	2110	70	21 ^{±0.1}	40 ^{-0.2/-0.4}	110	14	15	M3	6	17.5	5×15	16	—	3.4	—	M2	6	30
2125	2125	80			125						6×15							
2140	2140	90			140						7×15							
2155	2155	100			155						8×15							
2170	2170	110			170						9×15							
2185	2185	120			185						10×15							

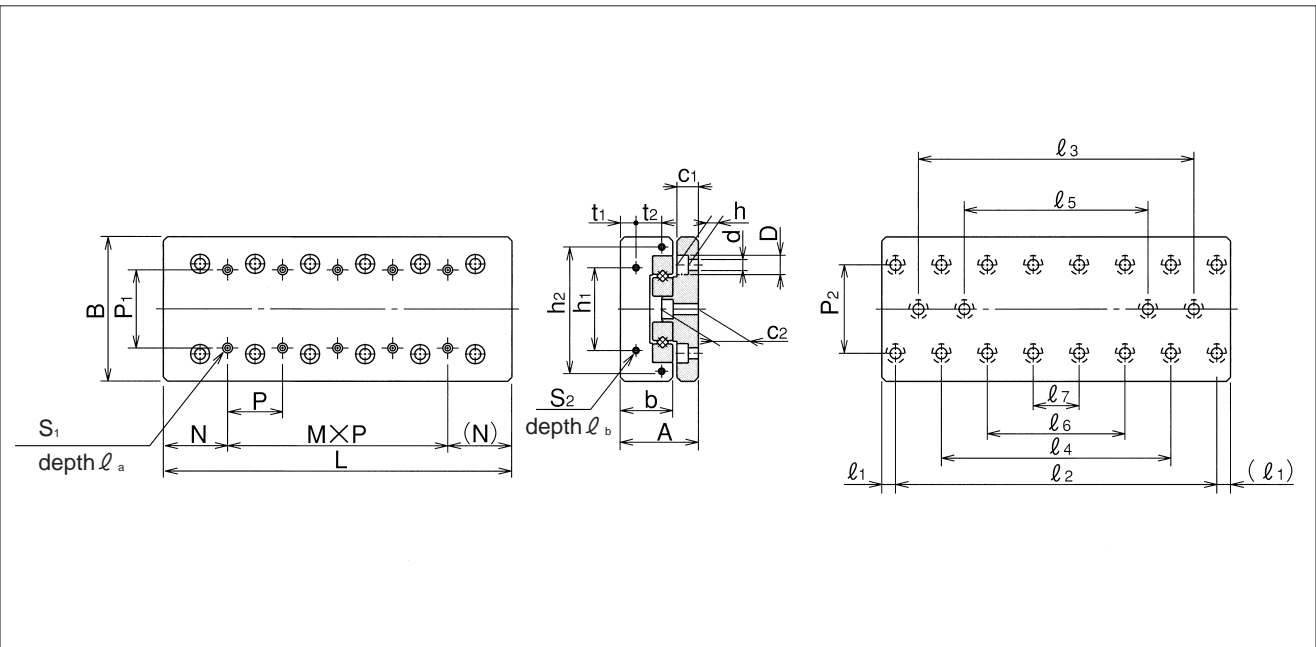

bed-surface mounting-hole dimensions										accuracy※		basic load rating		allowable load F N	allowable static moment			mass		size
d×D×h mm	c ₁ mm	c ₂ mm	ℓ ₁ mm	ℓ ₂ mm	ℓ ₃ mm	ℓ ₄ mm	ℓ ₅ mm	ℓ ₆ mm	ℓ ₇ mm	T μm	S μm	C N	Co N		M _P N·m	M _Y N·m	M _R N·m	SVT g	SVTS g	
2.5×4.5×2.5	5.5	9	3.5	18	-	-	-	-	-	2	4	464	476	158	1.79	1.47	3.22	82	36	1025
				28	-	-	-	-	-	2	4	805	952	316	3.08	3.5	6.45	120	50	1035
				38	-	-	-	-	-	2	4	959	1,190	396	6.98	6.4	8.06	158	69	1045
				48	-	28	-	-	-	2	5	1,100	1,420	475	9.53	8.81	9.68	190	83	1055
				58	-	38	-	-	-	2	5	1,240	1,660	554	12.4	11.6	11.2	225	98	1065
				68	-	48	-	-	-	2	5	1,510	2,140	712	19.3	18.3	14.5	260	113	1075
3.5×6.5×3.5	6.5	10.9	5	78	-	58	-	-	-	2	5	1,650	2,380	792	23.4	22.3	16.1	295	128	1085
				25	-	-	-	-	-	2	4	1,090	1,170	390	7.04	5.78	10.5	195	90	2035
				40	-	-	-	-	-	2	4	1,510	1,750	585	12.1	10.7	15.8	280	133	2050
				55	-	-	-	-	-	2	5	1,900	2,340	780	19.1	17.1	21.1	370	175	2065
				70	-	40	-	-	-	2	5	2,620	3,510	1,170	27.4	29.6	31.6	450	220	2080
				85	-	55	-	-	-	2	5	2,950	4,100	1,360	37.4	39.9	36.9	540	250	2095
				100	-	70	-	-	-	3	6	3,280	4,680	1,560	61.7	58.1	42.2	630	285	2110
				115	-	85	-	-	-	3	6	3,590	5,270	1,750	76.1	72.1	47.5	720	330	2125
130	-	100	-	70	-	3	6	4,210	6,440	2,140	92	95.9	58.1	800	360	2140				
145	-	115	-	85	-	3	6	4,500	7,030	2,340	109	113	63.3	880	400	2155				
160	-	130	-	100	-	3	7	4,790	7,610	2,530	148	143	68.6	970	440	2170				
175	-	145	-	115	85	3	7	5,080	8,200	2,730	170	164	73.9	1,060	480	2185				



※ Refer to Figure H-26 (page H-31) for accuracy T and S.

1N≒0.102kgf 1N·m≒0.102kgf·m

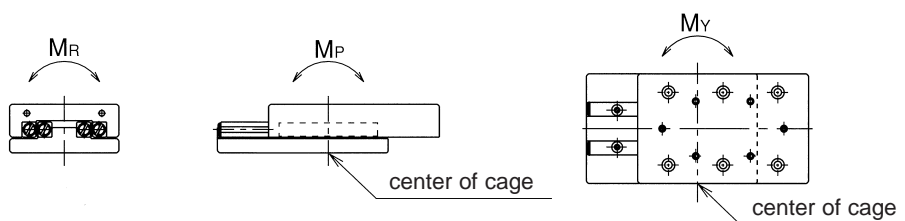


SVT TYPE

— SVT3/SVT4 —

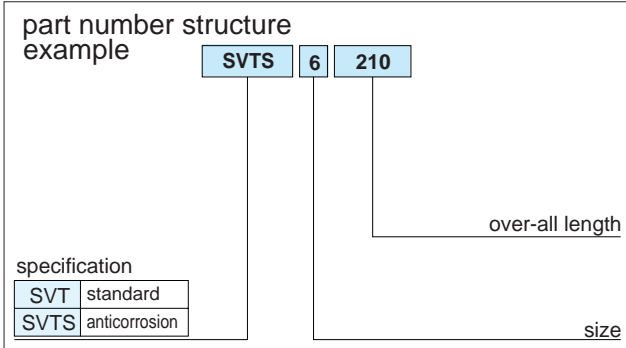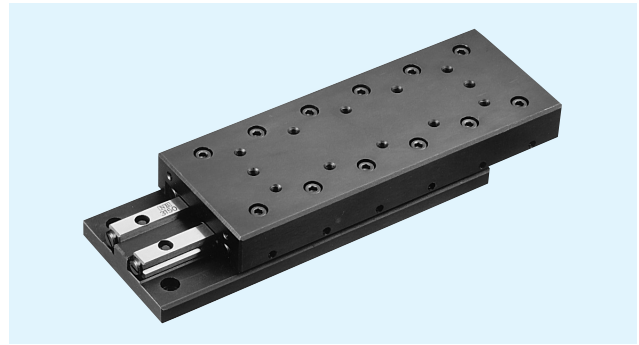


part number		stroke mm	major dimensions				table-top mounting-hole dimensions					table-end mounting-hole dimensions						
standard	anticorrosion		A mm	B mm	L mm	b mm	P ₁ mm	S ₁	ℓ _a mm	N mm	M×P mm	h ₁ mm	h ₂ mm	t ₁ mm	t ₂ mm	S ₂	ℓ _b mm	P ₂ mm
SVT3055	SVTS3055	30			55					—								
3080	3080	45			80					1×25								
3105	3105	60			105					2×25								
3130	3130	75			130					3×25								
3155	3155	90			155					4×25								
3180	3180	105	28 ^{±0.1}	60 ^{±0.1}	180	18.5	25	M4	8	27.5	5×25	40	—	5.5	—	M3	6	40
3205	3205	130			205					6×25								
3230	3230	155			230					7×25								
3255	3255	180			255					8×25								
3280	3280	205			280					9×25								
3305	3305	230			305					10×25								
SVT4085	SVTS4085	50			85					—								
4125	4125	75			125					1×40								
4165	4165	105			165					2×40								
4205	4205	130			205					3×40								
4245	4245	155	35 ^{±0.1}	80 ^{±0.1}	245	24	40	M5	10	42.5	4×40	55	—	6.5	—	M3	6	55
4285	4285	185			285					5×40								
4325	4325	210			325					6×40								
4365	4365	235			365					7×40								
4405	4405	265			405					8×40								

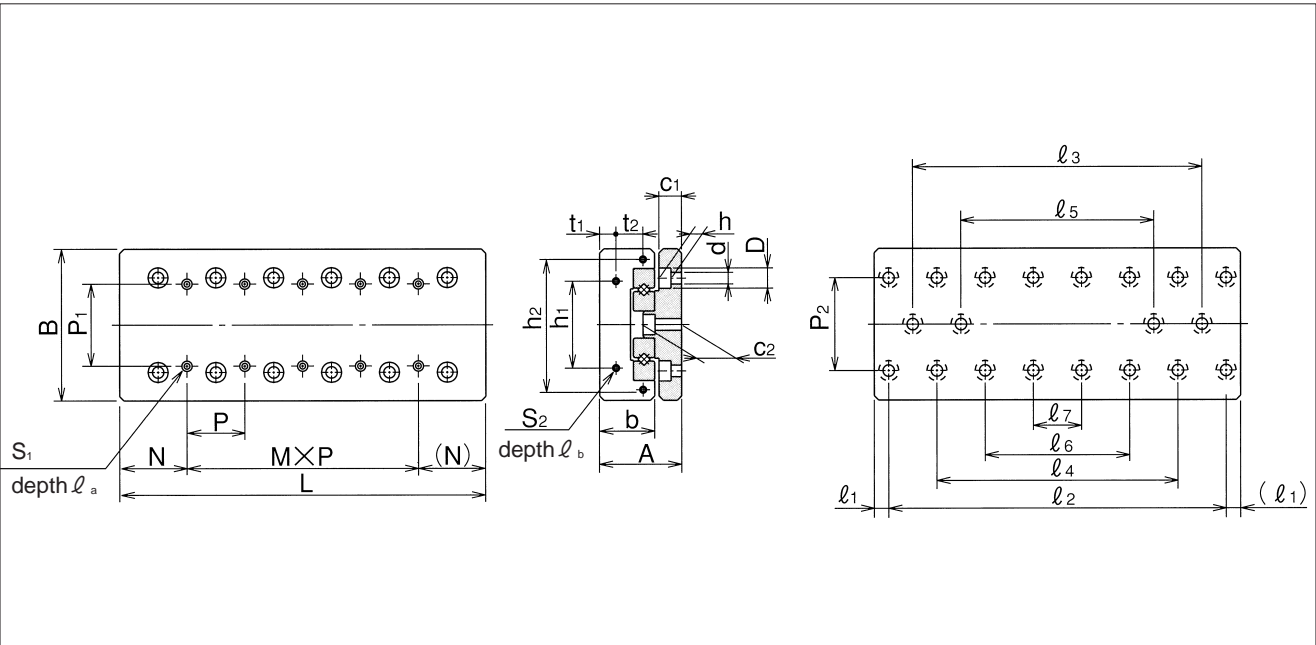

bed-surface mounting-hole dimensions										accuracy※		basic load rating		allowable load F N	allowable static moment			mass		size
d×D×h mm	c ₁ mm	c ₂ mm	l ₁ mm	l ₂ mm	l ₃ mm	l ₄ mm	l ₅ mm	l ₆ mm	l ₇ mm	T μm	S μm	C N	Co N		M _P N·m	M _Y N·m	M _R N·m	SVT g	SVTS g	
4.5×8×4.5	9	15	10	35	—	—	—	—	—	2	5	3,490	3,890	1,290	19.4	22.2	54.5	640	300	3055
				60	—	—	—	—	—	2	5	5,230	6,490	2,160	53.0	58.0	90.9	955	440	3080
				85	—	—	—	—	—	3	6	6,030	7,780	2,590	103	95.7	109	1,250	580	3105
				110	—	—	—	—	—	3	6	7,560	10,300	3,450	170	160	145	1,570	715	3130
				135	85	—	—	—	—	3	6	9,000	12,900	4,320	210	220	181	1,850	850	3135
				160	110	—	—	—	—	3	7	10,300	15,500	5,180	302	314	218	2,150	990	3180
				185	135	85	—	—	—	3	7	11,000	16,800	5,610	355	367	236	2,450	1,130	3205
				210	160	110	—	—	—	3	7	11,700	18,100	6,040	472	455	254	2,740	1,270	3230
				235	185	135	—	—	—	3	7	12,900	20,700	6,910	537	552	290	3,040	1,410	3255
				260	210	160	110	—	—	3	7	13,600	22,000	7,340	606	622	309	3,360	1,540	3280
285	235	185	135	—	—	3	7	14,200	23,300	7,770	757	735	372	3,660	1,680	3305				
5.5×10×5.4	10.5	18	10	65	—	—	—	—	—	2	5	7,110	7,920	2,640	96.0	84.9	159	1,700	780	4085
				105	—	—	—	—	—	3	6	10,600	13,200	4,400	217	199	265	2,500	1,140	4125
				145	—	—	—	—	—	3	7	13,800	18,400	6,160	296	316	371	3,300	1,510	4165
				185	105	—	—	—	—	3	7	16,800	23,700	7,920	488	513	477	4,100	1,870	4205
				225	145	—	—	—	—	3	7	19,700	29,000	9,680	729	759	584	4,900	2,240	4245
				265	185	—	—	—	—	3	7	22,400	34,300	11,400	1,010	1,050	690	5,700	2,600	4285
				305	225	145	—	—	—	4	8	25,100	39,600	13,200	1,350	1,390	796	6,500	3,000	4325
				345	265	185	—	—	—	4	8	27,600	44,800	14,900	1,730	1,780	902	7,300	3,300	4365
385	305	225	—	—	—	4	8	28,900	47,500	15,800	2,160	2,100	955	8,100	3,700	4405				



※ Refer to Figure H-26 (page H-31) for accuracy T and S.

1N≒0.102kgf 1N·m≒0.102kgf·m

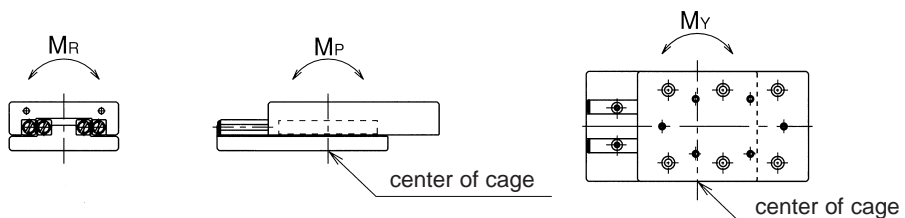


SVT TYPE

— SVT6/SVT9 —

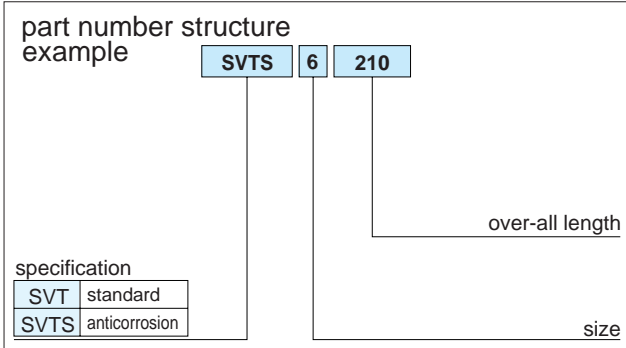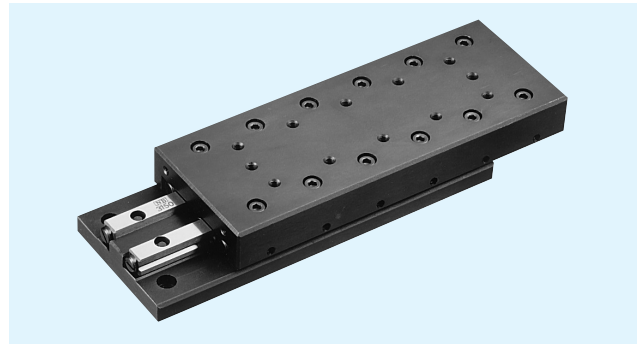


part number		stroke mm	major dimensions				table-top mounting-hole dimensions					table-end mounting-hole dimensions						
standard	anticorrosion		A mm	B mm	L mm	b mm	P ₁ mm	S ₁	ℓ _a mm	N mm	M×P mm	h ₁ mm	h ₂ mm	t ₁ mm	t ₂ mm	S ₂	ℓ _b mm	P ₂ mm
SVT6110	SVTS6110	60			110					—								
6160	6160	95			160					1×50								
6210	6210	130			210					2×50								
6260	6260	165			260					3×50								
6310	6310	200	45 ^{±0.1}	100 ^{±0.1}	310	31	50	M6	12	55	4×50	60	92	8	15	M4	8	60
6360	6360	235			360						5×50							
6410	6410	265			410						6×50							
6460	6460	300			460						7×50							
6510	6510	335			510						8×50							
SVT9210	—	130			210					—								
9310	—	180			310					1×100								
9410	—	350			410					2×100								
9510	—	450			510					3×100								
9610	—	550	60 ^{±0.1}	145 ^{±0.2}	610	43	85	M8	16	105	4×100	90	135	11	20	M4	8	90
9710	—	650			710						5×100							
9810	—	750			810						6×100							
9910	—	850			910						7×100							
91010	—	950			1,010						8×100							

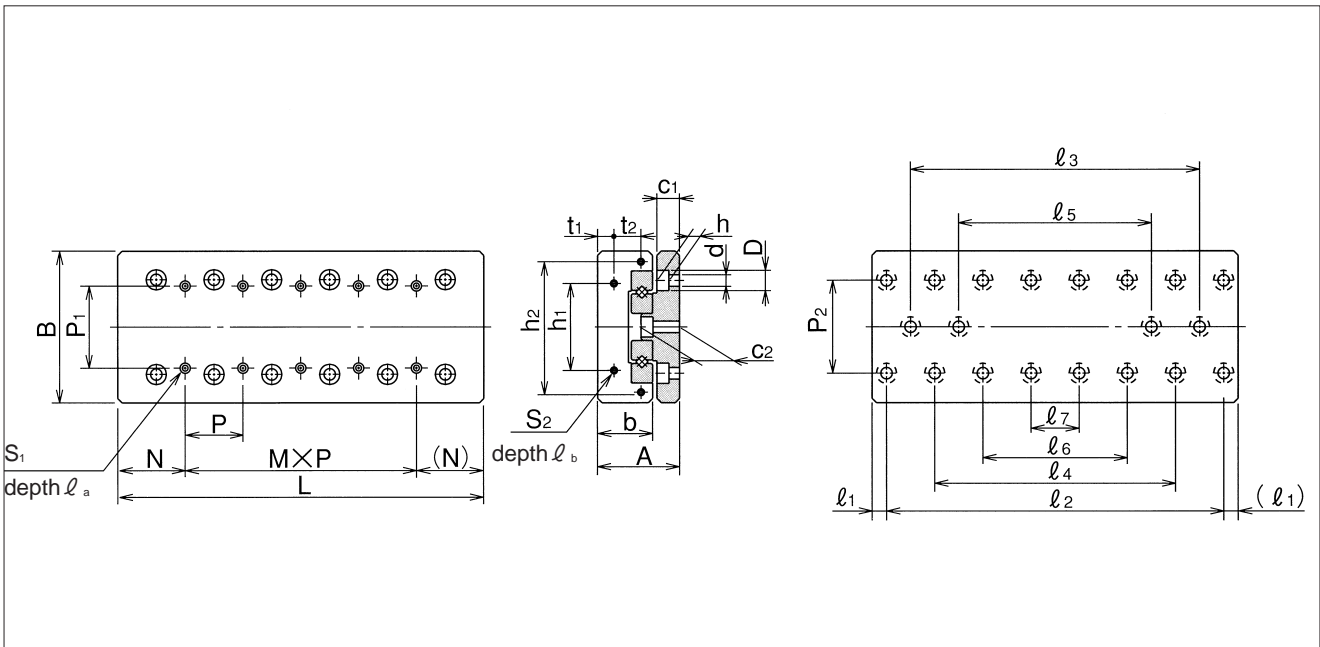

bed-surface mounting-hole dimensions										accuracy※		basic load rating		allowable load F N	allowable static moment			mass		size			
d×D×h mm	c ₁ mm	c ₂ mm	l ₁ mm	l ₂ mm	l ₃ mm	l ₄ mm	l ₅ mm	l ₆ mm	l ₇ mm	T μm	S μm	C N	Co N		M _P N·m	M _Y N·m	M _R N·m	SVT g	SVTS g				
7×11.5×7	13	23	10	90	—	—	—	—	—	3	6	16,500	17,700	5,910	260	230	400	3,280	1,705	6110			
				140	—	—	—	—	—	—	—	3	6	24,700	29,600	9,860	588	539	666	4,820	2,480	6160	
				190	90	—	—	—	—	—	—	—	3	7	32,200	41,400	13,800	1,040	978	933	6,270	3,255	6210
				240	140	—	—	—	—	—	—	—	3	7	39,200	53,200	17,700	1,630	1,540	1,200	7,740	4,030	6260
				290	190	—	—	—	—	—	—	—	3	7	45,800	65,100	21,600	2,340	2,240	1,460	9,200	4,805	6310
				340	240	140	—	—	—	—	—	—	4	8	52,200	76,900	25,600	2,750	2,850	1,730	10,740	5,580	6360
				390	290	190	—	—	—	—	—	—	4	8	58,400	88,800	29,500	3,660	3,770	2,000	12,190	6,355	6410
				440	340	240	—	—	—	—	—	—	4	8	64,400	100,000	33,500	4,700	4,830	2,260	13,800	7,130	6460
490	390	290	190	—	—	—	—	—	—	4	8	70,200	112,000	37,400	5,870	6,010	2,530	15,300	7,905	6510			
9×14×9	16	29	55	100	—	—	—	—	—	3	7	51,100	56,500	18,800	1,610	1,440	2,030	12,520	—	9210			
				200	—	—	—	—	—	—	—	3	7	79,300	98,900	32,900	3,150	3,360	3,560	17,950	—	9310	
				300	100	—	—	—	—	—	—	—	4	8	79,300	98,900	32,900	4,110	3,840	3,560	23,950	—	9410
				400	200	—	—	—	—	—	—	—	4	8	96,600	127,000	42,300	6,420	6,080	4,580	30,090	—	9510
				500	300	100	—	—	—	—	—	—	4	9	112,000	155,000	51,700	7,760	8,090	5,600	35,990	—	9610
				600	400	200	—	—	—	—	—	—	4	9	128,000	183,000	61,100	10,800	11,200	6,620	41,890	—	9710
				700	500	300	100	—	—	—	—	—	5	10	136,000	197,000	65,800	14,400	13,900	7,130	47,790	—	9810
				800	600	400	200	—	—	—	—	—	5	10	151,000	226,000	75,200	18,500	17,900	8,140	53,690	—	9910
				900	700	500	300	100	—	—	—	—	5	10	165,000	254,000	84,600	23,100	22,400	9,160	59,590	—	91010



※ Refer to Figure H-26 (page H-31) for accuracy T and S.

1N≒0.102kgf 1N·m≒0.102kgf·m

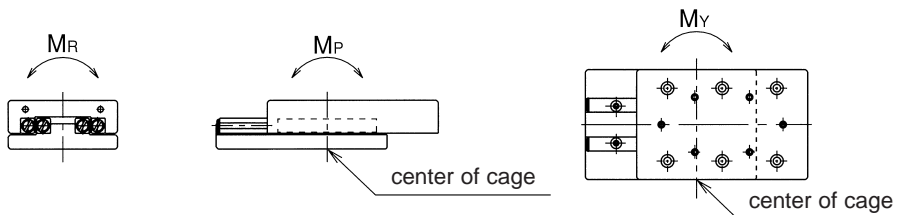


SYT TYPE

– SYT1/SYT2 –

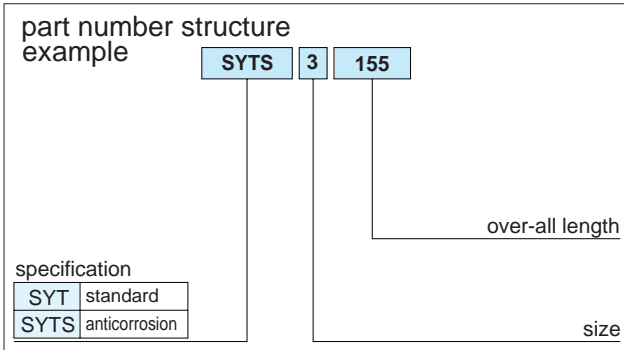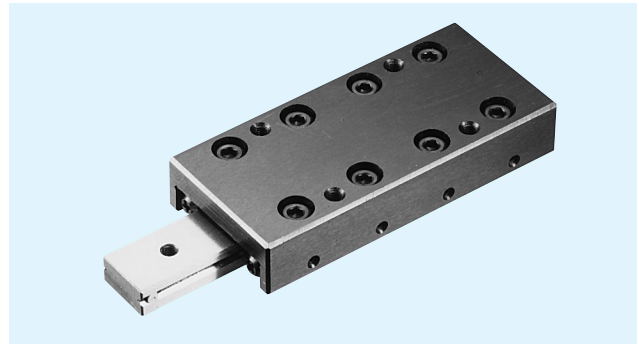


part number		stroke mm	major dimensions						table-top mounting-hole dimensions		
standard	anticorrosion		A mm	B ₁ mm	L mm	b mm	B ₂ mm	c mm	P ₁ mm	S ₁	ℓ mm
SYT1025	SYTS1025	12			25						
1035	1035	18			35						
1045	1045	25			45						
1055	1055	32	8 ^{±0.1}	20 ^{±0.1}	55	7.5	6.6	4	14	M2.6	3.5
1065	1065	40			65						
1075	1075	45			75						
1085	1085	50			85						
SYT2035	SYTS2035	18			35						
2050	2050	30			50						
2065	2065	40			65						
2080	2080	50	12 ^{±0.1}	30 ^{±0.1}	80	11.5	12	6	22	M3	5.5
2095	2095	60			95						
2110	2110	70			110						
2125	2125	80			125						

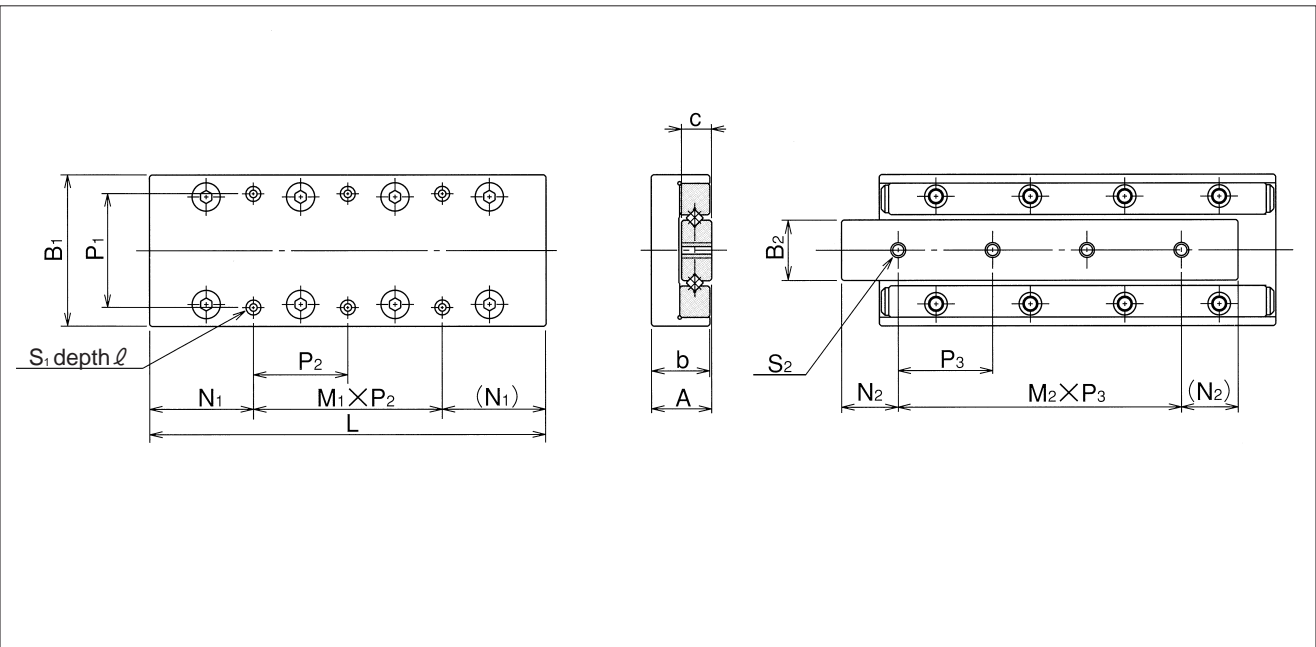

		center rail mounting-hole dimensions			accuracy※		basic load rating		allowable load F N	allowable static moment			mass g	size
N ₁ mm	M ₁ × P ₂ mm	S ₂	N ₂ mm	M ₂ × P ₃ mm	T μm	S μm	C N	C _o N		M _p N·m	M _v N·m	M _r N·m		
3.5	1 × 18	M2.6	5	2 × 7.5	2	4	464	476	158	1.79	1.47	1.79	22	1025
3.5	1 × 28		7.5	2 × 10	2	4	805	952	316	3.08	3.50	3.58	33	1035
12.5	1 × 20		7.5	3 × 10	2	5	959	1,190	396	6.98	6.40	4.48	42	1045
12.5	1 × 30		7.5	4 × 10	2	5	1,100	1,420	475	9.53	8.81	5.37	52	1055
12.5	2 × 20		7.5	5 × 10	2	5	1,240	1,660	554	12.4	11.6	6.27	63	1065
22.5	1 × 30		7.5	6 × 10	2	5	1,510	2,140	712	19.3	18.3	8.06	72	1075
12.5	2 × 30		7.5	7 × 10	2	5	1,650	2,380	792	23.4	22.3	8.96	83	1085
3.5	1 × 28	M3	7.5	1 × 20	2	4	1,090	1,170	390	7.04	5.78	7.63	79	2035
3.5	1 × 43		10	2 × 15	2	4	1,510	1,750	585	12.1	10.7	11.4	113	2050
17.5	1 × 30		10	3 × 15	2	5	1,900	2,340	780	19.1	17.1	15.2	150	2065
17.5	1 × 45		10	4 × 15	2	5	2,620	3,510	1,170	27.4	29.6	22.8	185	2080
17.5	2 × 30		10	5 × 15	2	5	2,950	4,100	1,360	37.4	39.9	26.7	215	2095
32.5	1 × 45		10	6 × 15	2	5	3,280	4,680	1,560	61.7	58.1	30.5	255	2110
17.5	2 × 45		10	7 × 15	2	5	3,590	5,270	1,750	76.1	72.1	34.3	295	2125



※ Refer to Figure H-26 (page H-31) for accuracy T and S.

1N ≒ 0.102kgf 1N·m ≒ 0.102kgf·m

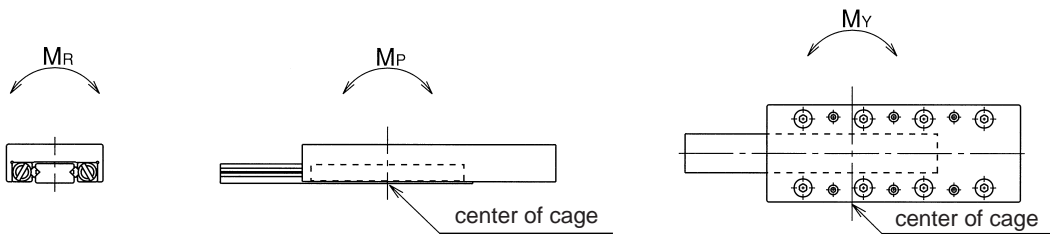


SYT TYPE

– SYT3 –

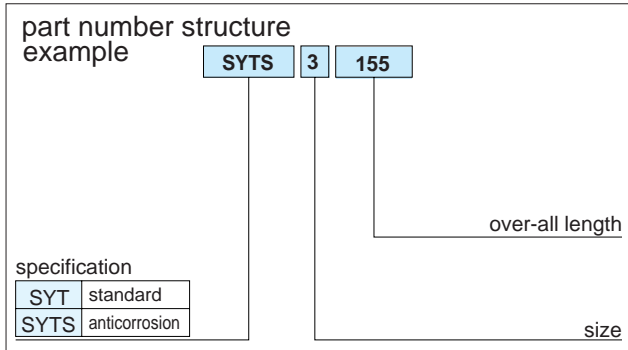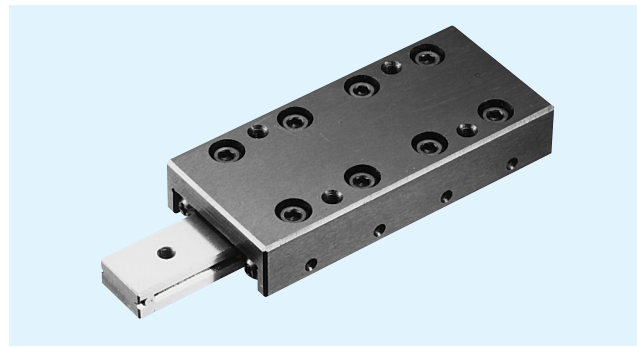


part number		stroke mm	major dimensions						table-top mounting-hole dimensions		
standard	anticorrosion		A mm	B ₁ mm	L mm	b mm	B ₂ mm	c mm	P ₁ mm	S ₁	ℓ mm
SYT3055	SYTS3055	30			55						
3080	3080	45			80						
3105	3105	60			105						
3130	3130	75	16 ^{±0.1}	40 ^{±0.1}	130	15.5	16	8	30	M4	7.5
3155	3155	90			155						
3180	3180	105			180						
3205	3205	130			205						

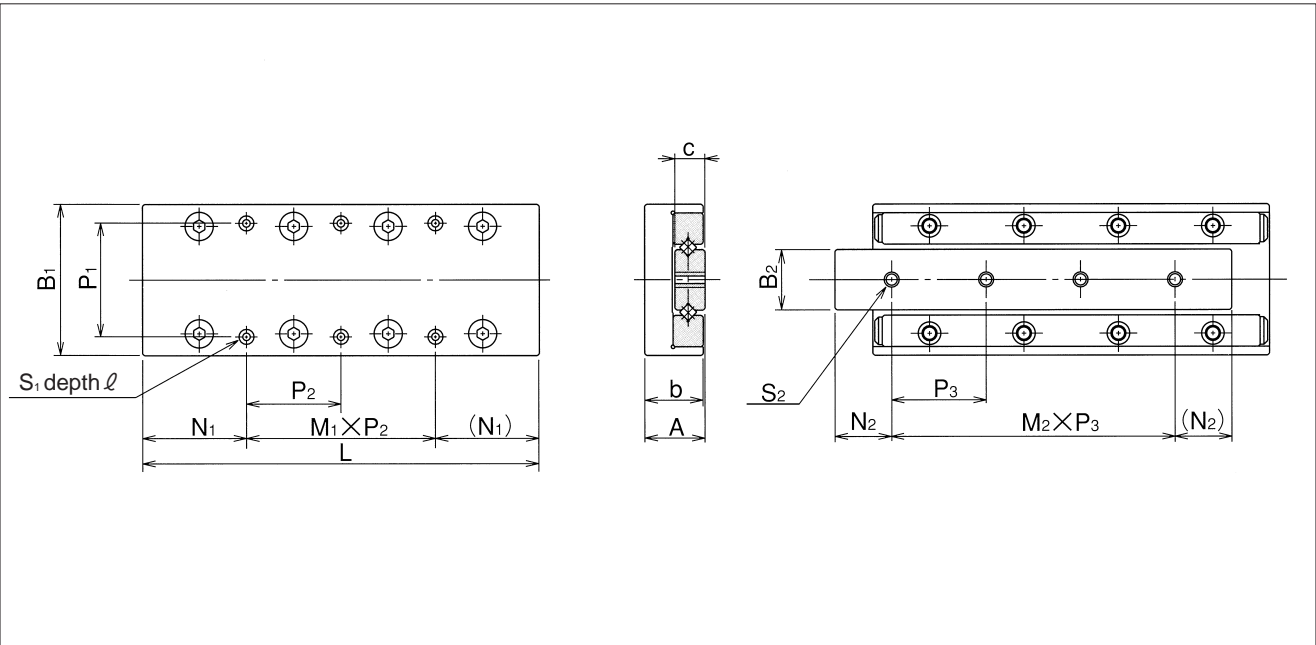

		center rail mounting-hole dimensions			accuracy※		basic load rating		allowable load F N	allowable static moment			mass g	size
N ₁ mm	M ₁ × P ₂ mm	S ₂	N ₂ mm	M ₂ × P ₃ mm	T μm	S μm	dynamic C N	static C ₀ N		M _P N·m	M _V N·m	M _R N·m		
7.5	1 × 40	M4	10	1 × 35	2	5	3,490	3,890	1,290	19.4	22.2	33.8	225	3055
7.5	1 × 65		15	2 × 25	2	5	5,230	6,490	2,160	53.0	58.0	56.4	340	3080
27.5	1 × 50		15	3 × 25	3	5	6,030	7,790	2,590	103	95.7	67.7	440	3105
27.5	1 × 75		15	4 × 25	3	5	7,560	10,300	3,450	170	160	90.3	560	3130
27.5	2 × 50		15	5 × 25	3	5	9,000	12,900	4,320	210	220	112	655	3155
52.5	1 × 75		15	6 × 25	3	5	10,300	15,500	5,180	302	314	135	770	3180
27.5	2 × 75		15	7 × 25	3	5	11,000	16,800	5,610	355	367	146	880	3205



※ Refer to Figure H-26 (page H-31) for accuracy T and S.

1N ≒ 0.102kgf 1N·m ≒ 0.102kgf·m

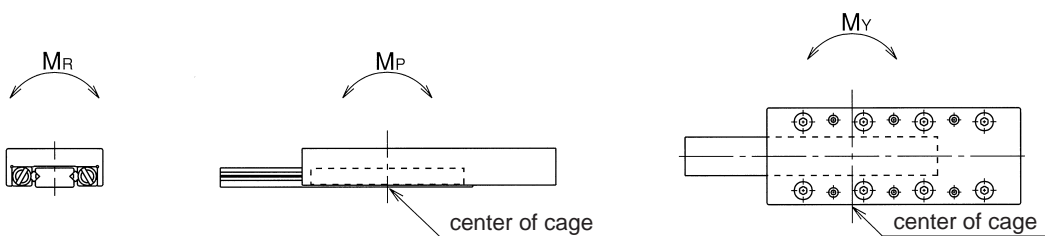


SYT-D TYPE

– SYT1/SYT2 –

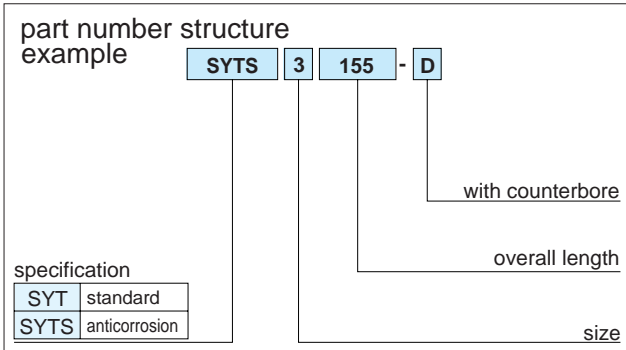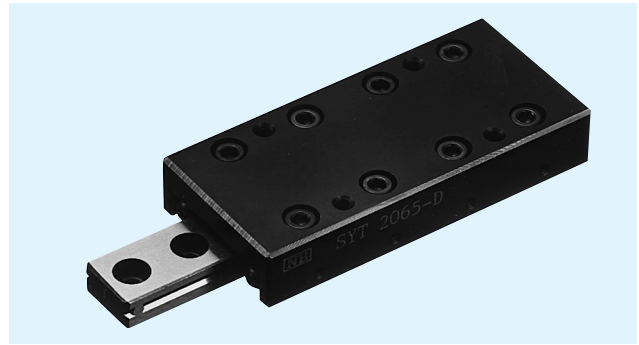


part number		stroke mm	major dimensions						table-top mounting-hole dimensions			
standard	anticorrosion		A mm	B ₁ mm	L mm	b mm	B ₂ mm	c mm	P ₁ mm	S ₁	∅ mm	N ₁ mm
SYT1025-D	SYTS1025-D	12			25							3.5
1035-D	1035-D	18			35							3.5
1045-D	1045-D	25			45							12.5
1055-D	1055-D	32	8 ^{±0.1}	20 ^{±0.1}	55	7.5	6.6	4	14	M2.6	3.5	12.5
1065-D	1065-D	40			65							12.5
1075-D	1075-D	45			75							22.5
1085-D	1085-D	50			85							12.5
SYT2035-D	SYTS2035-D	18			35							3.5
2050-D	2050-D	30			50							3.5
2065-D	2065-D	40			65							17.5
2080-D	2080-D	50	12 ^{±0.1}	30 ^{±0.1}	80	11.5	12.0	6	22	M3	5.5	17.5
2095-D	2095-D	60			95							17.5
2110-D	2110-D	70			110							32.5
2125-D	2125-D	80			125							17.5

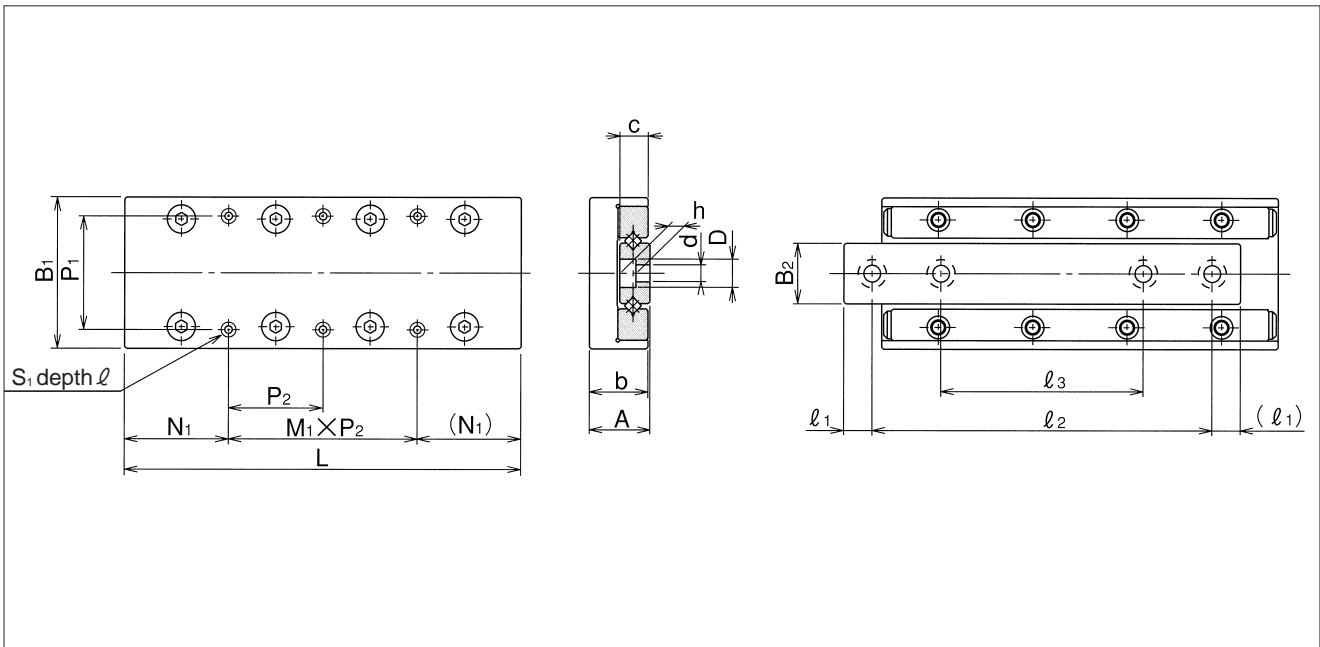

$M_1 \times P_2$ mm	center rail mounting-hole dimensions					accuracy※		basic load rating		allowable load F N	allowable static moment			mass g	size
	$d \times D \times h$ mm	l_1 mm	l_2 mm	l_3 mm	T μm	S μm	C N	Co N	M_p N·m		M_y N·m	M_r N·m			
1×18	$2.5 \times 4.1 \times 2.2$	3.5	18	—	2	4	464	476	158	1.79	1.47	1.79	22	1025	
1×28		5	25	—	2	4	805	952	316	3.08	3.50	3.58	33	1035	
1×20		3.5	38	25	2	5	959	1,190	396	6.98	6.40	4.48	42	1045	
1×30		3.5	48	29	2	5	1,100	1,420	475	9.53	8.81	5.37	52	1055	
2×20		5	55	31	2	5	1,240	1,660	554	12.4	11.6	6.27	63	1065	
1×30		5	65	35	2	5	1,510	2,140	712	19.3	18.3	8.06	72	1075	
2×30		5	75	40	2	5	1,650	2,380	792	23.4	22.3	8.96	83	1085	
1×28	$3.5 \times 6 \times 3.3$	5	25	—	2	4	1,090	1,170	390	7.04	5.78	7.63	79	2035	
1×43		7.5	35	—	2	4	1,510	1,750	585	12.1	10.7	11.4	113	2050	
1×30		5	55	33	2	5	1,900	2,340	780	19.1	17.1	15.2	150	2065	
1×45		5	70	40	2	5	2,620	3,510	1,170	27.4	29.6	22.8	185	2080	
2×30		5	85	45	2	5	2,950	4,100	1,360	37.4	39.9	26.7	215	2095	
1×45		7.5	95	50	2	5	3,280	4,680	1,560	61.7	58.1	30.5	255	2110	
2×45		7.5	110	55	2	5	3,590	5,270	1,750	76.1	72.1	34.3	295	2125	



※ Refer to Figure H-26 (page H-31) for accuracy T and S.

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

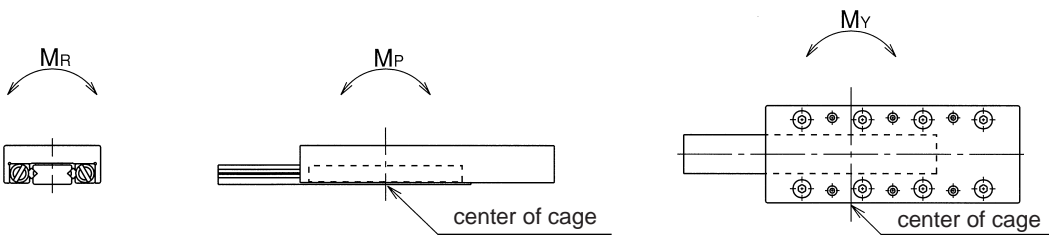


SYT-D TYPE

– SYT3 –

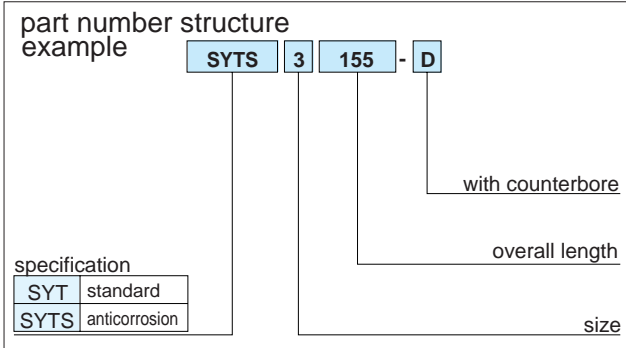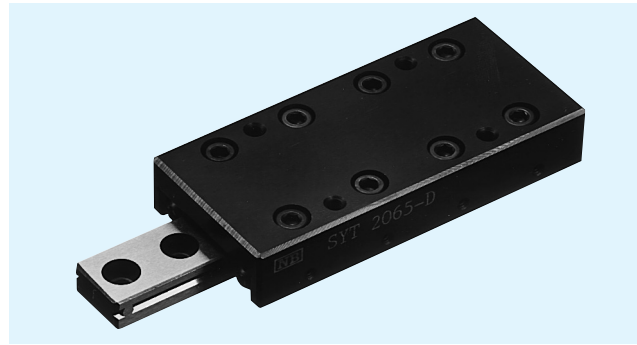


part number		stroke mm	major dimensions						table-top mounting-hole dimensions			
standard	anticorrosion		A mm	B ₁ mm	L mm	b mm	B ₂ mm	c mm	P ₁ mm	S ₁	∅ mm	N ₁ mm
SYT3055-D	SYTS3055-D	30			55							7.5
3080-D	3080-D	45			80							7.5
3105-D	3105-D	60			105							27.5
3130-D	3130-D	75	16 ^{±0.1}	40 ^{±0.1}	130	15.5	16	8	30	M4	7.5	27.5
3155-D	3155-D	90			155							27.5
3180-D	3180-D	105			180							52.5
3205-D	3205-D	130			205							27.5

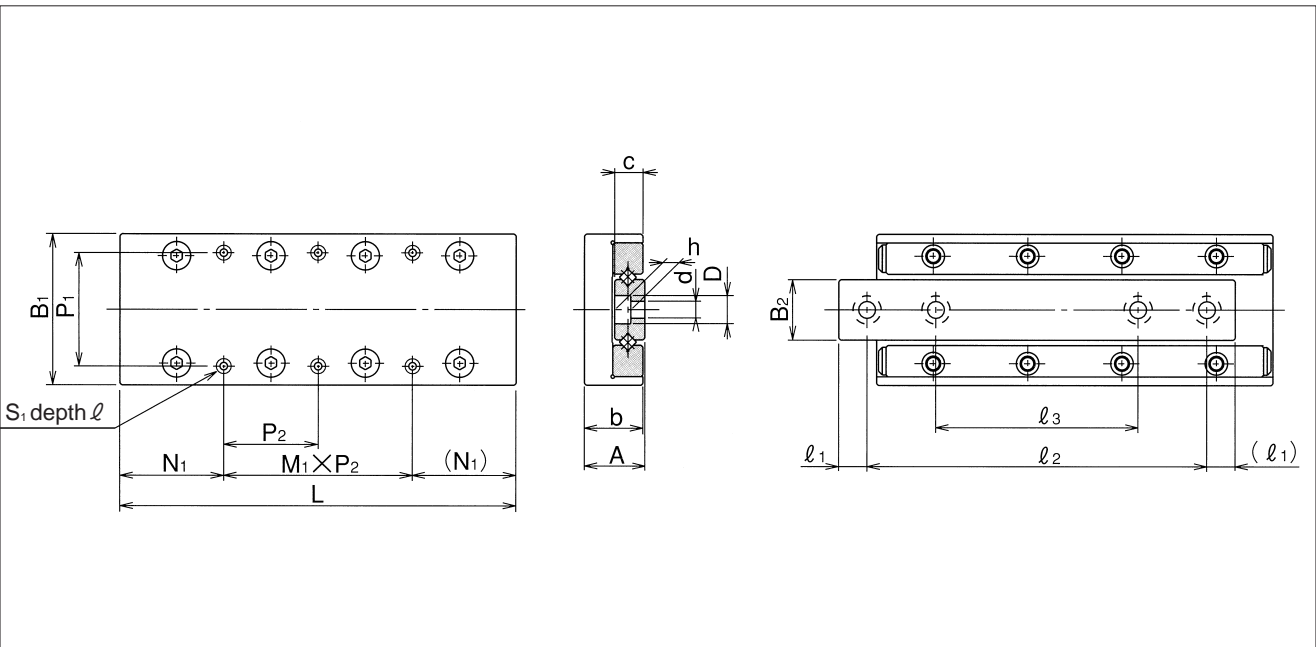

$M_1 \times P_2$ mm	center rail mounting-hole dimensions			accuracy※		basic load rating		allowable load F N	allowable static moment			mass g	size	
	$d \times D \times h$ mm	l_1 mm	l_2 mm	l_3 mm	T μm	S μm	dynamic C N		static Co N	M_p N·m	M_y N·m			M_r N·m
1×40	4.5×7.5×4.3	7.5	40	—	2	5	3,490	3,890	1,290	19.4	22.2	33.8	225	3055
1×65		6	68	43	2	5	5,230	6,490	2,160	53.0	58.0	56.4	340	3080
1×50		7.5	90	55	3	5	6,030	7,780	2,590	103	95.7	67.7	440	3105
1×75		7.5	115	65	3	5	7,560	10,300	3,450	170	160	90.3	560	3130
2×50		7.5	140	95	3	5	9,000	12,900	4,320	210	220	112	655	3155
1×75		7.5	165	85	3	5	10,300	15,500	5,180	302	314	135	770	3180
2×75		7.5	190	95	3	5	11,000	16,800	5,610	355	367	146	880	3205

※ Refer to Figure H-26 (page H-31) for accuracy T and S.

1N≒0.102kgf 1N·m≒0.102kgf·m

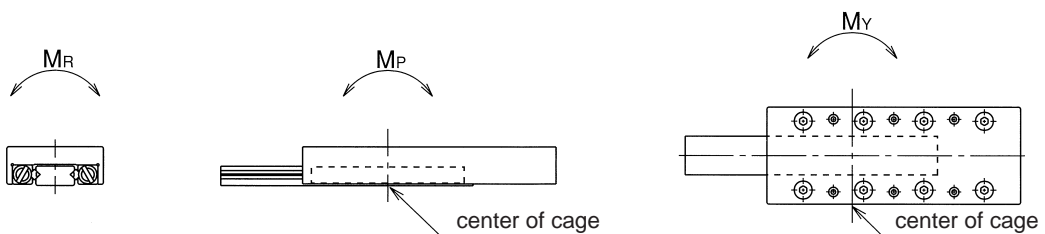

Miniature Slide Table SYBS Type

The NB miniature slide table SYBS type is a limited stroke slide with the most compact envelope dimensions, featuring two ball raceway grooves. The SYBS type utilizes ball as the rolling elements. The ultra compact design contributes greatly to the creation of smaller and lighter industrial machinery and equipment of all types.

Structure and Advantages

NB's miniature slide table incorporates a unique integrated ball cage between the table and bed. All components have been produced with high precision machining technologies.

Ultra Compact Design

The table height of the SYBS type is 3.2 ~ 4.5mm and the width is 6 ~ 12mm. This compact envelope when compared with conventional slide tables helps to realize the miniaturization of machinery and equipment.

Low Friction - Low Noise

Since the rolling ball elements do not re-circulate, the frictional resistance will not vary significantly resulting in smooth operation reliable high precision.

Additionally, the caged balls greatly reduce the contact noise of the rolling elements bringing about a low-noise operation.


High Accuracy

The ball raceway grooves of the bed and table are processed through simultaneous precision machining resulting in minimal processing errors, and bringing about extremely smooth, precision linear movement.

Stainless Steel Structure

The SYBS type slide table is constructed from only stainless steel materials. This allows for use in corrosive or high temperature applications. The SYBS is a perfect component for vacuum or clean room type environments.

Figure H-27 Structure of SYBS Type Slide Table

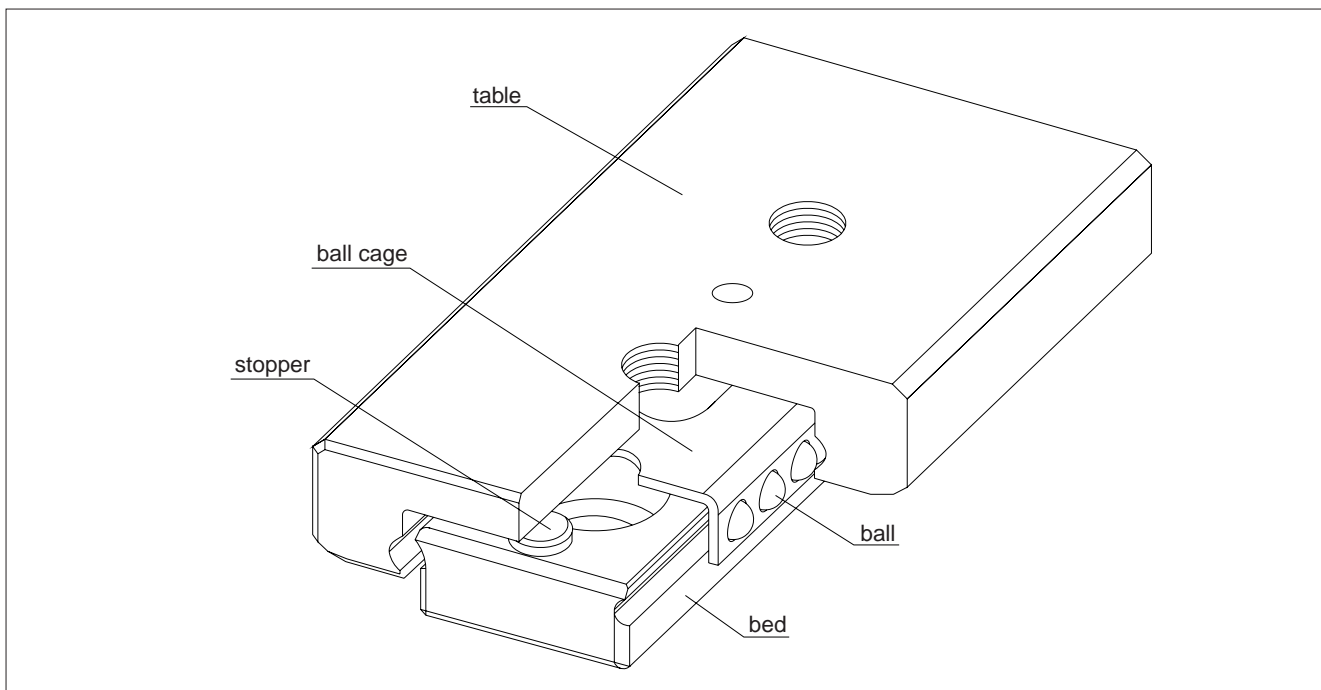


Accuracy

Table H-9 reflects the measured accuracies of the SYBS Miniature Slide Table. The deviation is measured as Figure H-28 illustrates. Dial indicators are placed to the centers of the table's top and side (opposite side from the NB mark) and then the table is moved the full travel distance without any load.

Table H-9 Accuracy Unit: mm

Item	Tolerance and Acceptable Values
Height (H)	±0.020
Width (W)	±0.025
Deviation from Center of Surface C	0.004
Deviation from Center of Surface D	0.006

Figure H-28 Accuracy Measurement Method

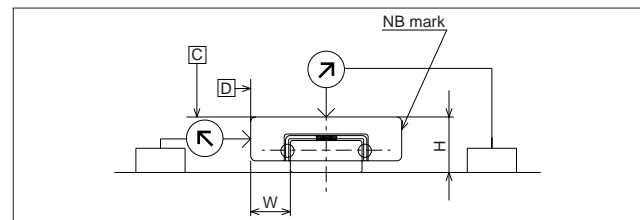


Load Rating

The load capacity of the Miniature Slide Table varies depending upon the direction of the applied load.

Table H-10 Variation of Load Rating vs. Direction of Load

Basic Dynamic Rated Load	Vertical Direction	1.00 x C
	Horizontal Direction	1.13 x C
Basic Static Rated Load	Vertical Direction	1.00 x C ₀
	Horizontal Direction	1.19 x C ₀

Figure H-29 Direction of Load

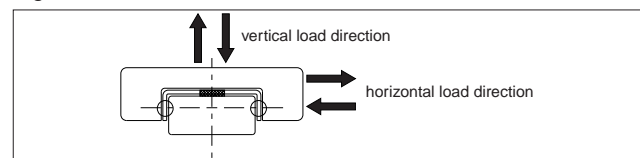

Rated Life

The life of an NB miniature slide table can be calculated using the following equations:

Travel life:

$$L = \left(\frac{f_T}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50$$

L: travel life (km) f_T : temperature coefficient f_w : load coefficient

C: basic dynamic load (N) P: applied load (N)

※Refer to page Eng-5 for the coefficients

Life Time:

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n_1 \cdot 60}$$

L_h: life time (hr) s: stroke length (m)

n₁: number of strokes per minute (cpm)

Mounting

Shape of Mounting Surface

In most general installations, the Miniature Slide Table is mounted by pushing the reference planes of the bed and table against a shoulder that is set up on the mounting surface. Machined escape grooves should be used in the corners of the shoulder (as illustrated in Figure H-30) so that the corners will not interfere with the reference corners of the bed and/or table. Table H-11 lists the recommended shoulder heights of the mounting reference planes for the opposing sides.

When installing the Miniature Slide Table without providing machined escape grooves, the corner radius may be realigned as illustrated in Figure H-31. Table H-12 list the values of the corner radius of the mounting surfaces.

Figure H-30 Shape of Mounting Surface -1

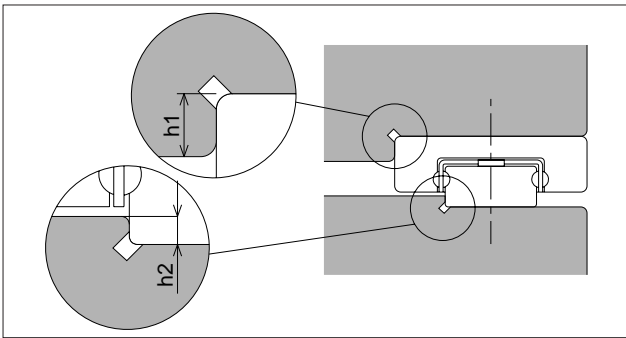


Table H-11 Shoulder Height of Mounting Reference Surfaces Unit: mm

Part Number	Shoulder Height of Table h1	Shoulder Height of Bed h2
SYBS 6	1.0	0.5
SYBS 8	1.2	0.8
SYBS 12	1.5	0.8

Figure H-31 Shape of Mounting Surface -2

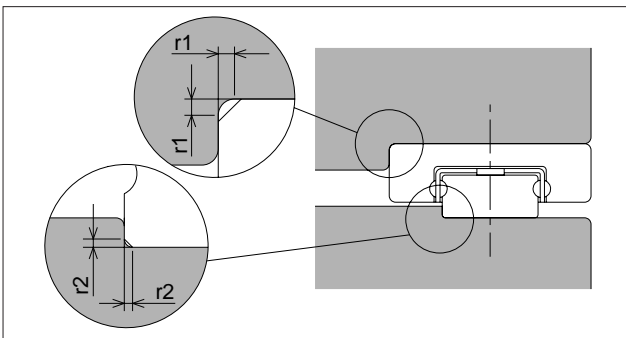


Table H-12 Maximum Corner Radius Unit: mm

Part Number	Mounting Surface of Table	Mounting Surface of Bed
	r1	r2
SYBS 6	0.1	0.05
SYBS 8	0.15	0.1
SYBS 12	0.15	0.1


Recommended Torque Values

The bed should be tightened with a consistent torque by using a torque wrench. Table H-13 lists the recommended tightening torque values:

Table H-13 Recommended Torque Value Unit: N·m

Part Number	Nominal Bolt	Recommended Torque
SYBS 6	M1	0.03
SYBS 8	M1.6	0.15
SYBS 12	M2	0.31

Figure H-32 Shape of SYBS Bed

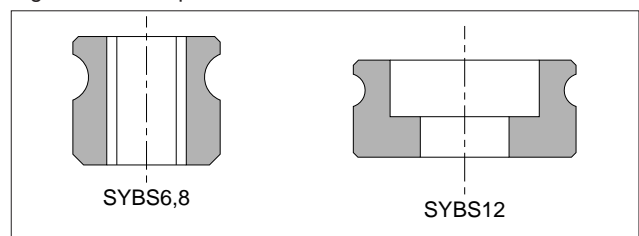

Precautions for Use

Mounting Example and Mounting Screws

All taps used for mounting the SYBS are fully through-hole. Mount the SYBS type as illustrated in Figure H-33 only after considering the size of mounting screw, the maximum penetration depth, and the height of the bed. Make certain that the mounting screws do not interfere with the ball cage; otherwise, the accuracy and travel life of this table will be affected adversely. Special bolts are designed for SYBS type and are available from NB. Please refer to Table H-14 for dimensions of these special mounting screws.

Figure H-33 Mounting Example


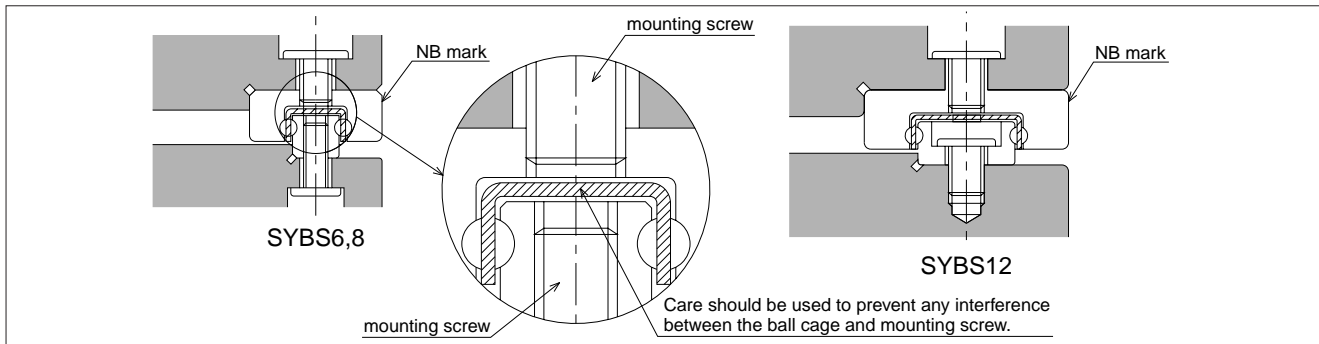


Table H-14 Mounting Screws (Material: Stainless Steel) Unit: mm

M (Nominal Bolt)	D	H	Pitch	L
M1	1.8	0.5	0.25	5
M1.4	2.5	0.5	0.3	6
M1.6	2.3	0.5	0.35	4,5,6
M2	3	0.6	0.4	6

Figure H-34 Mounting Screw

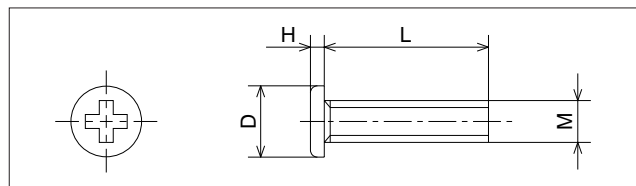

Stopper

On both ends of the SYBS Miniature Slide Table bed section, stopper screws have been attached to prevent the ball cage from escaping. Please note that the screws are designed only to prevent the ball cage from escaping and are not intended for the use as a mechanical stopper. The ball cage may become deformed on contact with the stopper and this will result in a negative affect of the accuracy and rated life of the table.

Lubrication

NB's Miniature Slide Table SYBS Type is supplied with an initial application of lithium soap grease and therefore is ready for immediate use. Periodic application of a similar lubricant should be necessary depending on the operating conditions. For use in clean rooms or vacuum environments, miniature slide tables without grease or with customer specified grease are available. NB also provides low dust generation lubricant. Please refer to page Eng-20 for further details.

Ball Cage Displacement

When a miniature slide table is operated at high speeds; when offset loads or vibrations are present, the ball cage may deviate from the normal position. In general operating conditions this is normal and it is recommended that the table be cycled to perform maximum full stroke travel several times during operation. This will allow the ball cage to be returned to its normal central position.


Pre-Load

The SYBS Miniature Slide Table is prepared with only a slight positive-clearance.

Allowable Load


The allowable load is a load under which the sum of elastic deformation of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. Where very smooth and highly accurate liner motion is required, make sure to use the product within the allowable load values.

SYBS TYPE

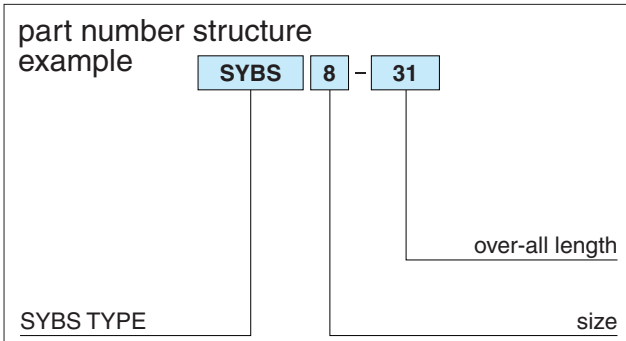

part number	major dimensions				table-top mounting-hole dimensions					
	H mm	W mm	H ₁ mm	stroke mm	B mm	L mm	P ₁ mm	P ₂ mm	S ₁ mm	maximum screw penetration depth mm
SYBS 6-13	3.2	2	0.7	5	6	13	6.0	-	M1.4	0.5
SYBS 6-21				12		21	10.0	-		
SYBS 8-11	4	2.5	1	4	8	11	5.5	-	M2	0.7
SYBS 8-21				12		21	10.0	-		
SYBS 8-31				18		31	10.0	21		
SYBS 12-23	4.5	3	1	12	12	23	8.0	-	M2	1.2
SYBS 12-31				18		31	15.0	-		
SYBS 12-46				28		46	15.0	31		

※1:Exclusive mounting screws are provided with the SYBS-12 type only.
Other various sizes are also available. (Please refer to page H-51)

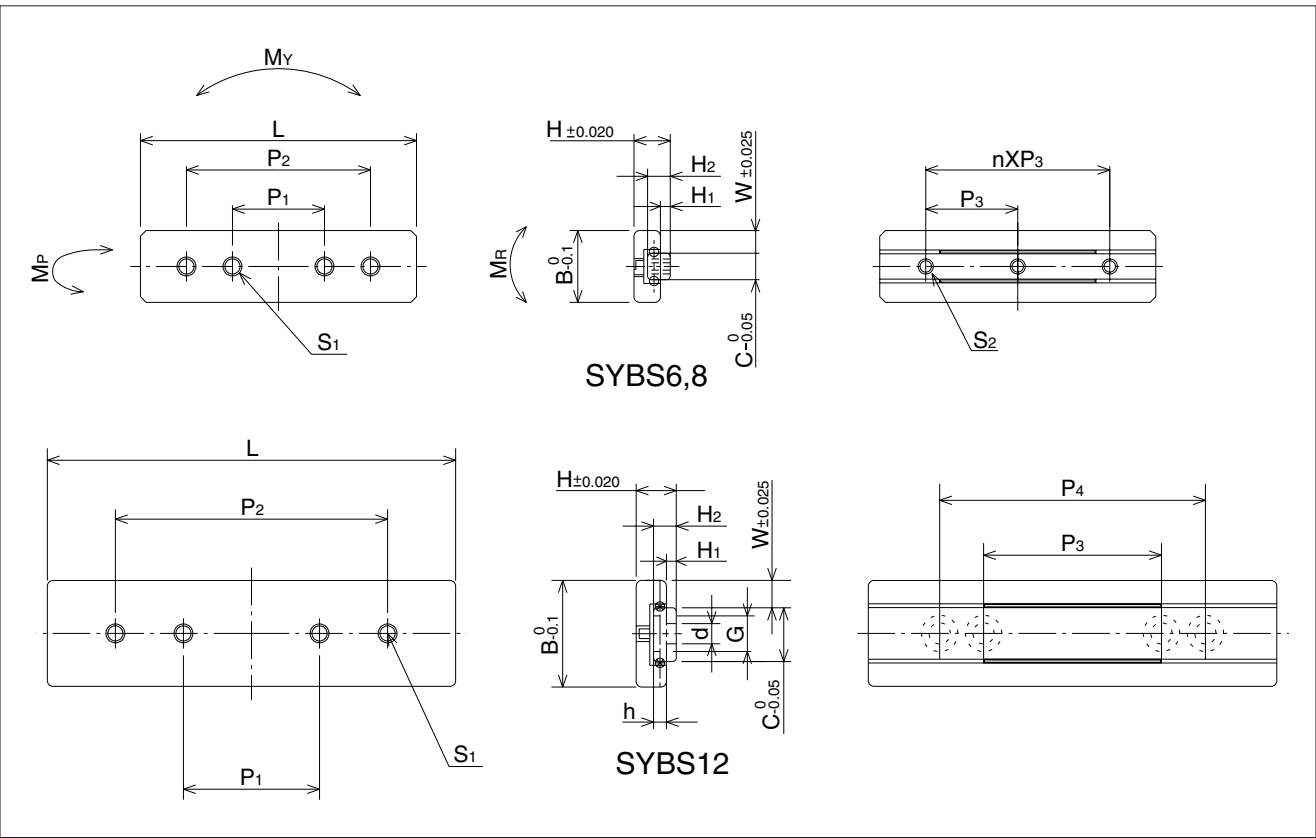

bed-surface mounting-hole dimensions							basic load rating		allowable load	allowable static moment			mass	size
H ₂	C	d×G×h	S ₂	P ₃	n	P ₄	dynamic	static		F	M _P	M _V		
mm	mm	mm		mm		mm	N	N	N	N·m	N·m	N·m	g	
2.0	2	—	M1	7	1	—	154	180	60.1	0.21	0.25	0.21	1.4	6—13
				7	2	—	229	315	105	0.57	0.698	0.37	2.2	6—21
2.6	3	—	M1.6	5	1	—	201	211	70.4	0.23	0.28	0.35	2.0	8—11
				10	1	—	368	493	164	1.02	1.22	0.83	3.7	8—21
				10	2	—	473	704	234	1.97	2.35	1.19	5.5	8—31
2.6	6	※1 2.4×4×1.5	—	15	1	—	404	563	187	1.30	1.55	1.80	7.6	12—23
				15	1	—	473	704	234	1.97	2.35	2.25	10.2	12—31
				20	—	30	658	1,120	375	4.80	5.72	3.60	15.2	12—46

GONIO WAY

RVF type

Nippon Bearing's Gonio Way family has adopted the RVF type with a flat installation surface for easy processing of tables and beds.

NB Gonio Way (RVF type) is a low-friction, non-recirculating curved motion bearing utilizing precision cross-rollers. The RVF type is ideal for changing the gradient or for obtaining an accurate gradient angle without changing the center of rotation. This component is used mainly in optical equipment and measuring devices where high precision is required.

Structure and Advantages

The NB Gonio Way RVF type consists of curved tracking bases with precisely ground V-grooves and flat installation surfaces, as well as a curved roller cage in which cross rollers are fitted. Precision rollers are employed as the rolling elements. Since the rolling elements do not recirculate, the frictional resistance will not vary significantly, providing curved movement with extremely low frictional resistance.

Flat Installation Surface

The flat installation surfaces of the RVF type do not require complicated machining of tables and beds when installing the product. As a result, machining costs can be reduced greatly.

Same Rotation Center

The curved V-grooves, which are finished with a precise grinding process, provide an accurate center of rotation.

Furthermore, the products are composed to provide identical rotation centers when products of each size are installed to two axes. (Refer to Table H-17.)


Low Frictional Resistance and Minute Motion

The precision grinding work and curved roller cage allow for extremely low frictional resistance. The negligible difference between starting and dynamic frictions allows the RVF type to follow minute movements accurately, realizing curved movement of high accuracy.

Low Noise

Since NB Gonio Way employs a non-recirculating design, noise will not be generated at the circulating area. In addition, the curved roller cage realizes quiet operation without contact noise between the rolling elements.

Figure H-35 Structure of RVF Type Gonio Way

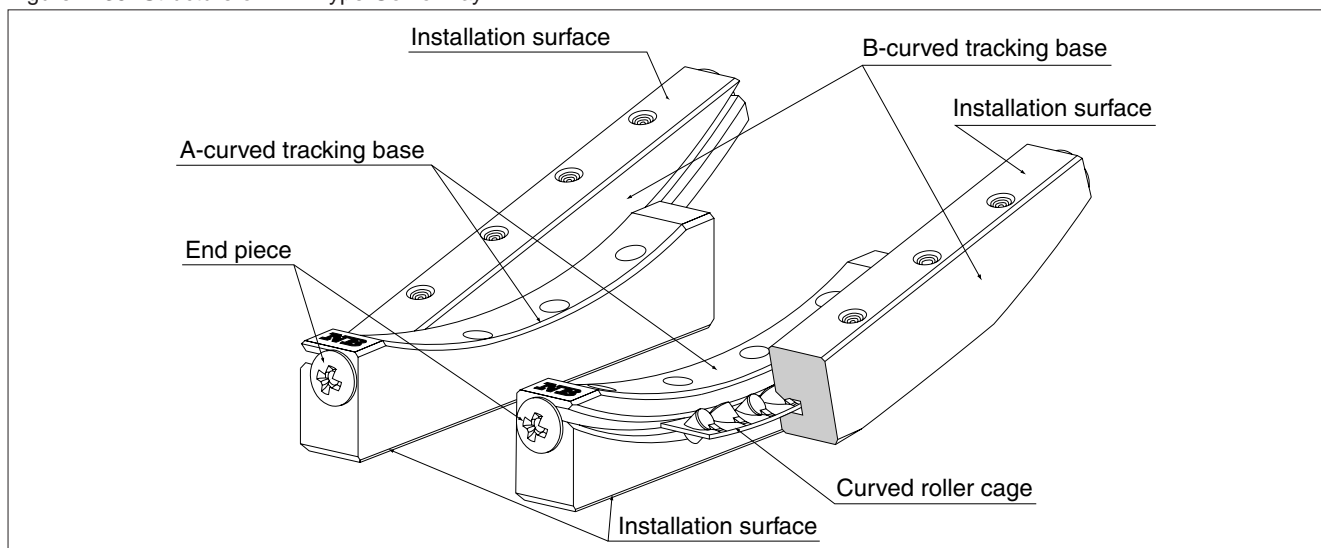


ACCURACY

The accuracies of the Gonio Way RVF type are represented by mutual dimensional errors of four units, which are measured along the overall length using the procedure as shown in Figure H-36.

Table H-15 Accuracy

Part Number	Mutual Error between A and B	Mutual Error between E and F
	Mutual Error between C and D	Mutual Error between H and I
RVF2050- 70	10	10
RVF2050- 87		
RVF2050-103		
RVF2050-120		
RVF3070- 85		
RVF3070-110		
RVF3100-125		
RVF3100-160		

Figure H-36 Measuring Method of Accuracy

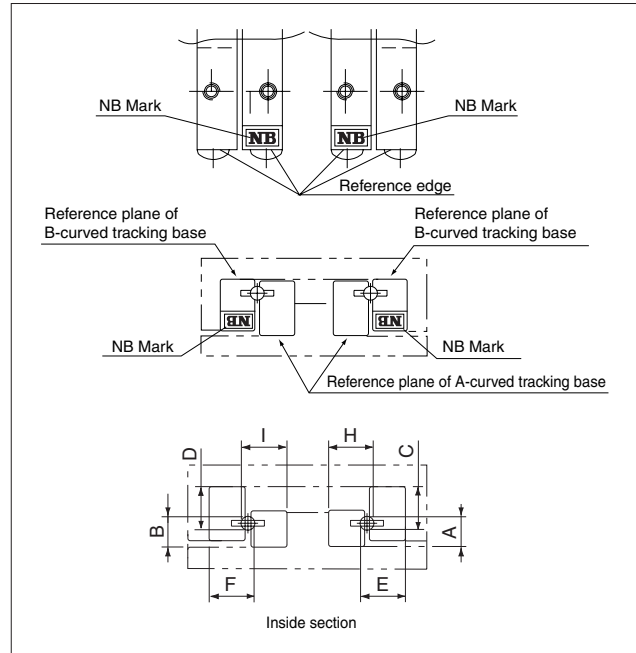

LIFE CALCULATION

The life of an NB miniature slide table can be calculated using the following equations:

Travel life:


$$L = \frac{90}{\theta} \cdot \left(\frac{f_T}{f_w} \cdot \frac{C}{P} \right)^{\frac{10}{3}}$$

L: travel life (106round trips) θ : rotating angle (degree)
 f_T : temperature coefficient f_w : load coefficient
 C: basic dynamic load (N) P: applied load (N)
 ※Refer to page Eng-5 for the coefficients.

Life Time:

$$L_h = \frac{L \cdot 10^6}{60 \cdot n}$$

L_h : life time (hr) s: stroke length (m)
 n : number of strokes per minute (cpm)




ACCURACY OF MOUNTING SURFACE

To maximize the performance of NB's Gonio Way RVF type, it is important to finish the installation surface with high accuracies.


- Parallelism of plane 1 against plane A
- Perpendicularity of plane 2 against plane A
- Perpendicularity of plane 5 against plane A
- Parallelism of plane 3 against plane B
- Perpendicularity of plane 4 against plane B
- Perpendicularity of plane 6 against plane B
- Parallelism of plane 2 against plane C
- Parallelism of plane 4 against plane C
- Mutual error between the size of a and b

Figure H-37 Accuracy of installation surface

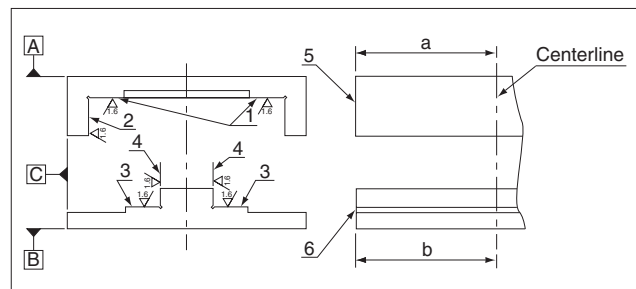

INSTALLATION

Figure H-38. Installation Example

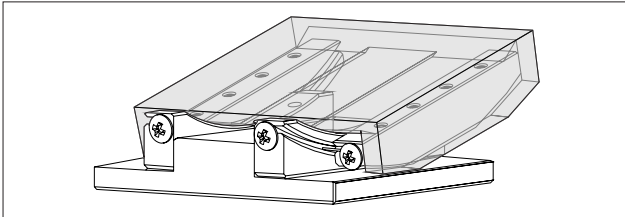

Installation Procedure

Setting the curved tracking bases temporarily

- (1) Remove burrs, stains, and dust from the installation surface of the curved tracking bases of tables and beds. Foreign objects must be kept out of the assembly work as well.
- (2) Apply oil of low viscosity to contact surfaces, check the reference edges of an A-curved tracking base and bed, and then tighten the bolts temporarily. (Figure H-39)
- (3) Align the reference edges (NB mark side) of a B-curved tracking base and an A-curved tracking base to the same orientation. Then, insert the curved roller cage between the curved tracking bases at the center area. Make sure that the curved roller cage will not interfere with the curved raceway grooves of the curved roller tracking bases. (Figure H-39b)
- (4) Check the reference edge of the table, set the table over the B-curved tracking base, and then secure the table temporarily. (Figure H-39c)


Setting four curved tracking bases in parallel position

- (5) Move the table to the maximum stroke ends of both sides and adjust the setting so that the curved roller cage is positioned at the center of the curved tracking base.
- (6) Move the table to the center position and tighten the adjustment screw with slightly strong torque * by using a torque wrench. (Figure H-39d)

* "Slightly strong torque" here means slightly stronger than the torque at which the oscillation of the test indicator is stabilized at the minimum value when the table is moved right and left, or when pressure is applied to the rolling direction while the test indicator is attached to the side face (reference side) of the table. (Figure H-40i)

- (7) Move the table to the maximum stroke end of one side and tighten the regulating screw on the curved roller cage with the same torque as in step (6). (Figure H-39e)

Figure H-39. Installation Procedure (1)

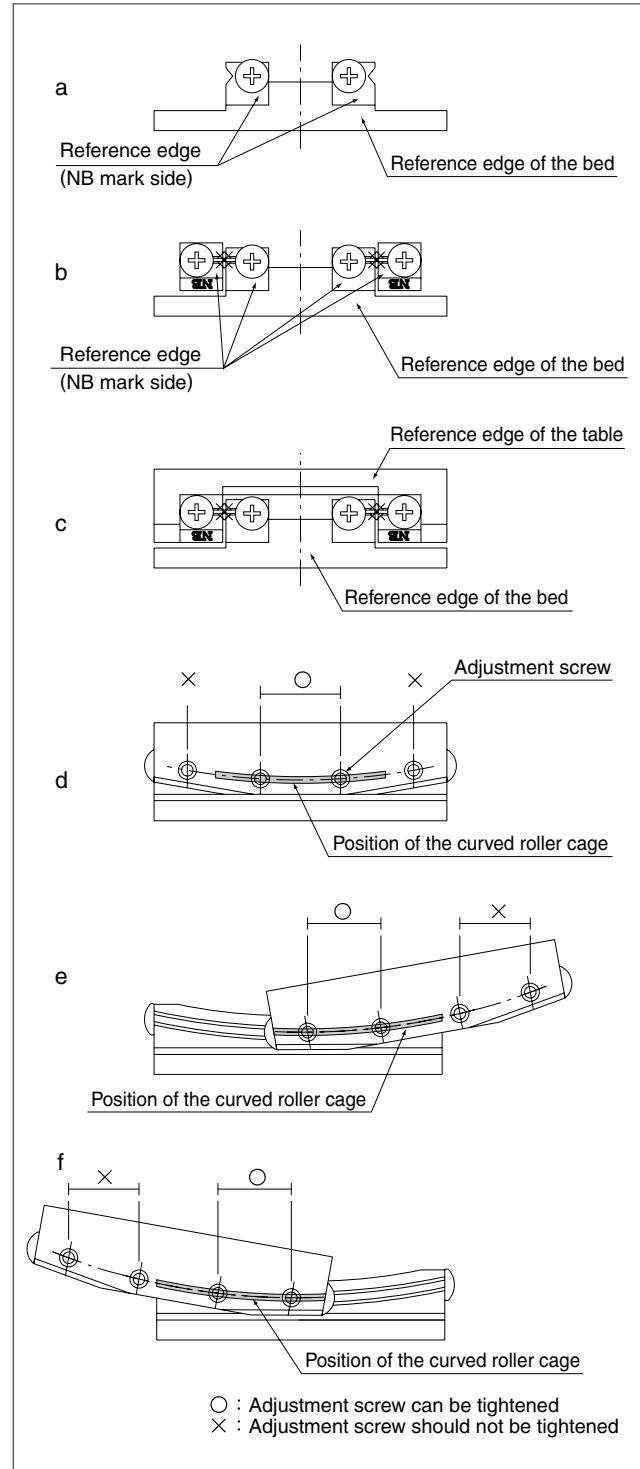

- (8) Move the table to the maximum stroke end of the other side and tighten the adjustment screw with a torque wrench by repeating the procedure above. (Figure H-39f)

Securing the curved tracking bases

- (9) Mount an edge reference plate between the reference edge of the A-curved tracking base and end piece, press it against the reference edge of the bed, and then tighten only the mounting bolt in the middle. (Figure H-40g)
- (10) Repeat the procedure above to mount an edge reference plate between the reference edge of the B-curved tracking base and the end piece. Press it against the reference edge of the bed, and then tighten only the mounting bolt in the middle. (Figure H-40h) In order to maintain parallelism of curved tracking bases, do not cycle the table during this process and make sure that there is no clearance between the edge of the table and the edge reference plate.
- (11) Secure the rest of the mounting bolts on the curved roller cage one by one while moving the table as instructed in steps (7) and (8).

Adjusting the preload


- (12) Move the table to the right and left with the test indicator attached to the side face of the table (reference side). Or, apply pressure in the rolling direction and confirm that the oscillation of the attached indicator is stabilized at the minimum level. (Figure H-40i)
- (13) Return the mounting bolt on the B-curved tracking base at the adjustment screw side to the temporary setting.
- (14) Return the table to the center position, slightly loosen the adjustment screw in the middle, and then gradually loosen the adjustment screws on the curved roller cage while moving the table as instructed in steps (7) and (8). Make sure not to reduce the preload too much.
- (15) Finally, secure the B-curved tracking base at the adjustment screw side, which has been installed temporarily. Secure the mounting bolts on the curved roller cage one by one while moving the table as instructed above.

Table H-16 Recommended Tightening Torque for Mounting Bolts Unit/N·m

Nominal Designation of Screw	Tightening Torque
M2.5	0.5
M3	1.1

(When using stainless-steel screw A2-70 on aluminum seating for tightening)

Figure H-40 Installation Procedure (2)

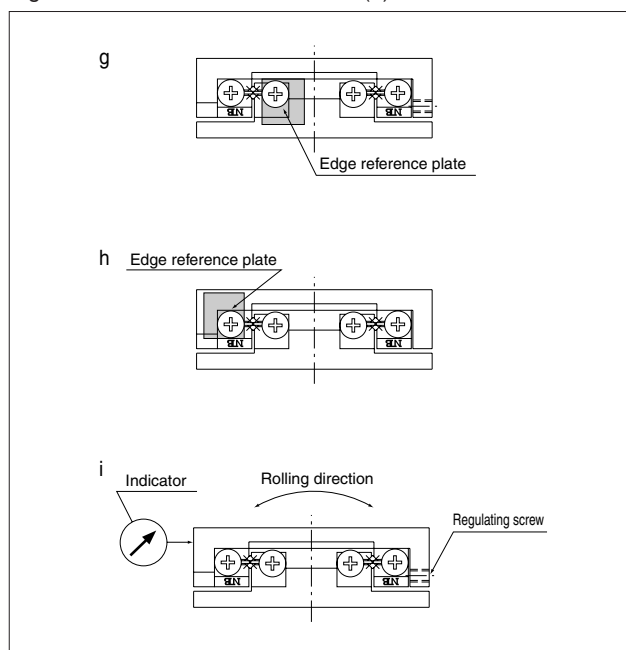

2-AXES AND CUSTOM SPECIFICATIONS

When incorporating RVF type units onto two axes as illustrated in Figure H-41, adjust the height of one lifting axis as instructed in Table H-17. Then, adjust dimension b (the height of the installation surface of the A-curved tracking base) in Figure H-41 to the same dimension in order to obtain the identical rotation center for the two axes. In addition, requests can be made for custom specifications including table units fitted for two axes, non-standard lengths for curved tracking bases, the radius of rotation, the rotation range, and the number of rollers. Contact NB for further information and arrangements.

Figure H-41 Two-Axes Specifications

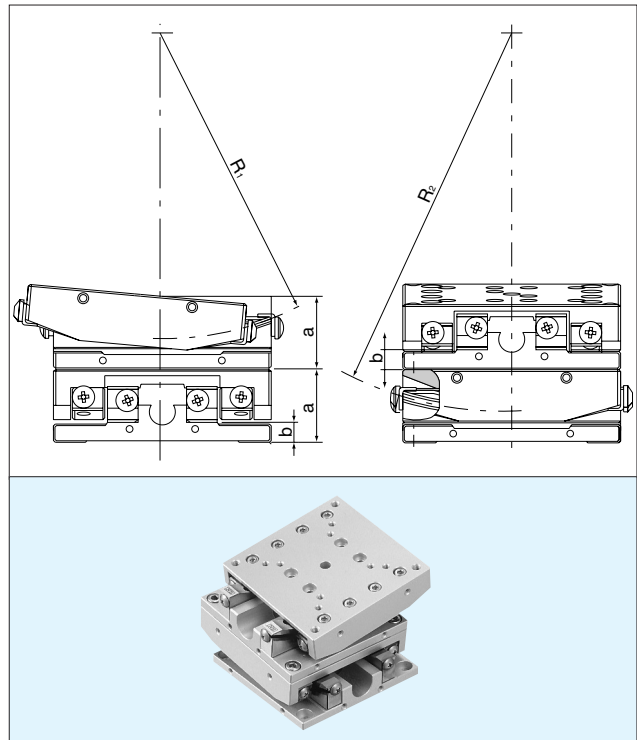


Table H-17 Two-Axes Specifications

Unit/mm

Model Number Combinations	a	R ₁	R ₂
RVF2050- 70 RVF2050- 87	17	70	87
RVF2050-103 RVF2050-120	17	103	120
RVF3070- 85 RVF3070-110	25	85	110
RVF3100-125 RVF3100-160	35	125	160

PRECAUTIONS FOR USE

Lubrication:

NB gonio ways are lubricated using lithium soap grease prior to shipment, so they can be used immediately. Periodic application of a similar type grease is recommended depending on the operating conditions.

NB also provides low dust generation grease for the linear system. Please refer to page Eng-20 for further details.

Dust Prevention:

If a foreign matter, such as dust and dirt, enters the inside of the NB gonio way, it may deteriorate the accuracy and life of the system. A gonio way used in a hostile environment should be protected with a cover.

Use Environment:

The recommended operating temperature range of the NB gonio way is -20°C to 110°C .

Adjustment:

Inaccurate adjustment of the accuracy on the mounting surface or pre-load may reduce the motion accuracy, resulting in skewing and shortening of gonio way life. The adjustment should be carried out carefully.

Cage Slippage:

When used under high-speed, unbalanced-load, or vibrational conditions, cage slippage may occur. The stroke distance should be determined with sufficient margin, and an excessive pre-load should not be applied.

End Pieces:

End pieces are attached to each end of the NB gonio way to prevent removal of the curved roller cage. Do not use as a mechanical stopper.

Careful Handling:

Dropping a NB gonio way may result in scratches or dents on the raceway surface, preventing smooth motion and affecting accuracy. Care should be exercised in handling.

Use as a Set:



The accuracy tolerance of a gonio way is designed to be adjusted within a particular set of components. If components from different sets are used, accuracy may be affected.

Allowable Load:


The allowable load is a load under which the sum of elastic deformation of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. Where very smooth and highly accurate liner motion is required, make sure to use the product within the allowable load values.

RVF TYPE

— SVT6/SVT9 —

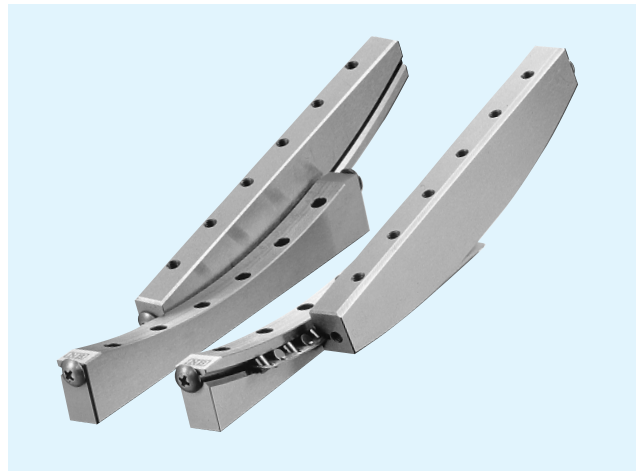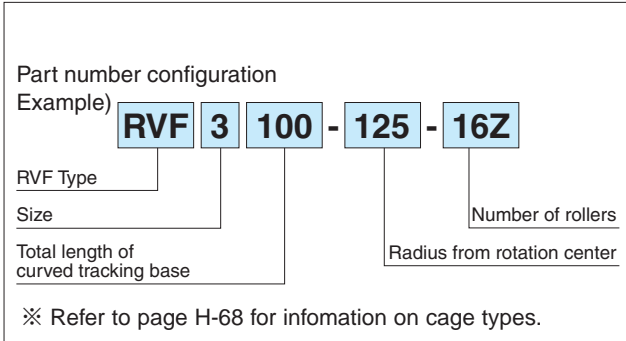

Part Number	Rotation Range	Roller Diameter D mm	Number of Rollers Z	Major Dimensions							
				L mm	R mm	R ₁ mm	R ₂ mm	H ₁ mm	H ₂ mm	h ₁ mm	h ₂ mm
RVF2050- 70-11Z	±5°	2	10	50	70	67	73	72.5	64.5	7.5	7.5
RVF2050- 87-10Z			10		87	84	89.5	89.5	81.5	7.5	7.5
RVF2050-103-10Z			10		103	100	106	105.5	97.5	7.5	8
RVF2050-120- 9Z			9		120	117	123	122.5	114.5	7.5	8
RVF3070- 85-11Z	±10°	3	10	70	85	81	89	89.5	75.5	14	12.5
RVF3070-110-10Z			10		110	106	114	114.5	100.5	12.8	12.5
RVF3100-125-16Z			100	16	125	121	129	129.5	110.5	17.5	18
RVF3100-160-14Z				14	160	156	164	164.5	145.5	15	18

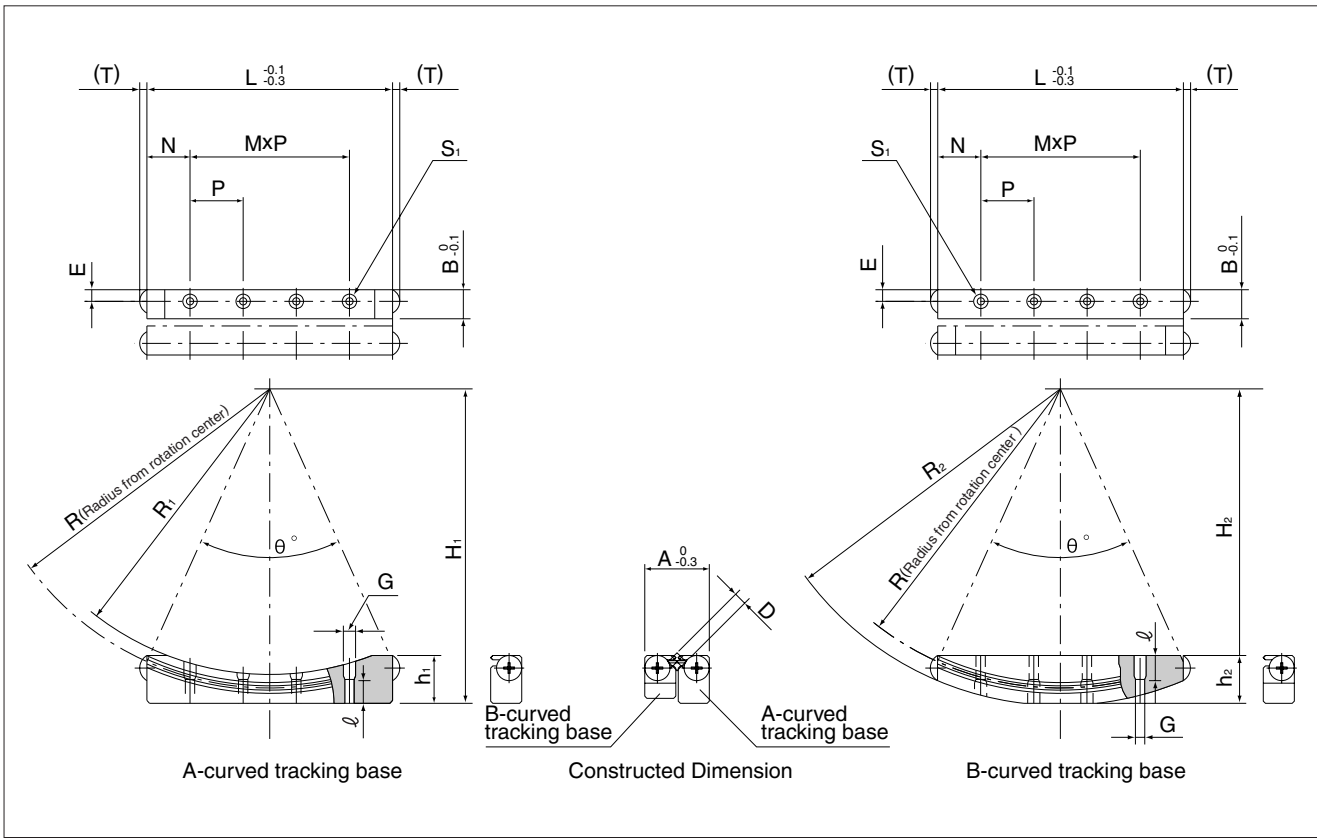

(One set includes A-curved tracking bases (2), B-curved tracking bases (2), curved roller cages (2), end pieces (8), and installation referense plate (2).)

A	B	MxP	N	E	S ₁	ℓ	G	T	θ°	allowable	Basic Load Rating		Weight	size
										load	Dynamic	Static		
										F	C	Co		
15	7.25	3 × 12.5	6.25	2.5	M2.5	4	3	2.1	41.8°	800	1,179	1,468	66	2050- 70-10z
									33.3°	810	1,179	1,468	70	2050- 87-10z
	3 × 13	5.5	2.1					28.0°	815	1,179	1,468	70	2050-103-10z	
								24.0°	657	997	1,174	70	2050-120- 9z	
18	8.5	3 × 15	12.5	3	M3	7	3.5	1.9	48.6°	1,840	2,631	3,515	182	3070- 85-10z
									37.1°	1,870	2,631	3,515	182	3070-110-10z
	5 × 15	12.5	1.9					47.1°	2,950	3,745	5,626	327	3100-125-16z	
								36.4°	2,630	3,387	4,921	323	3100-160-14z	

GONIO WAY

RV type

The NB Gonio way is a curved SV type slide way. It is a curved motion bearing utilizing low-friction, non-recirculating, precision cross-rollers. It is used when there is a need to change the gradient or obtain an accurate gradient angle without changing the center of rotation in high-precision optical and measurement equipment.

STRUCTURE AND ADVANTAGES

The NB Gonio way consists of hardened curved tracking bases with precisely machined V-grooves and a curved roller cage with cross-rollers. High-precision rollers are used as the rotating elements. Since the rotational elements do not recirculate, there is less friction fluctuation, resulting in a low-frictional curved motion.

Suitable for Minute Motion:

The frictional resistance is extremely small and there is little or no difference between the static and dynamic frictional resistance. The NB Gonio slide way is well suited for minute motion. It can follow minute motion accurately, resulting in highly accurate curved motion.

High Rigidity and High Load Capacity:

The rollers provide a larger contact area than ball elements and there is less elastic deformation. Additionally, since the rollers do not recirculate, the effective number of rotating elements is larger, resulting in high rigidity and high load capacity.


Ease of Assembly and Installation:

The rollers are retained inside a curved roller cage, allowing assembly, installation, and the handling of components simplified. A set of components consists of 4 curved tracking bases, 2 curved roller cages, and 8 end pieces. It can be assembled immediately.

Low Noise:

The use of a roller cage prevents noise from being generated by contact between the rotating elements, resulting in quiet operation.

Figure H-42 Structure of RV Type Gonio Way

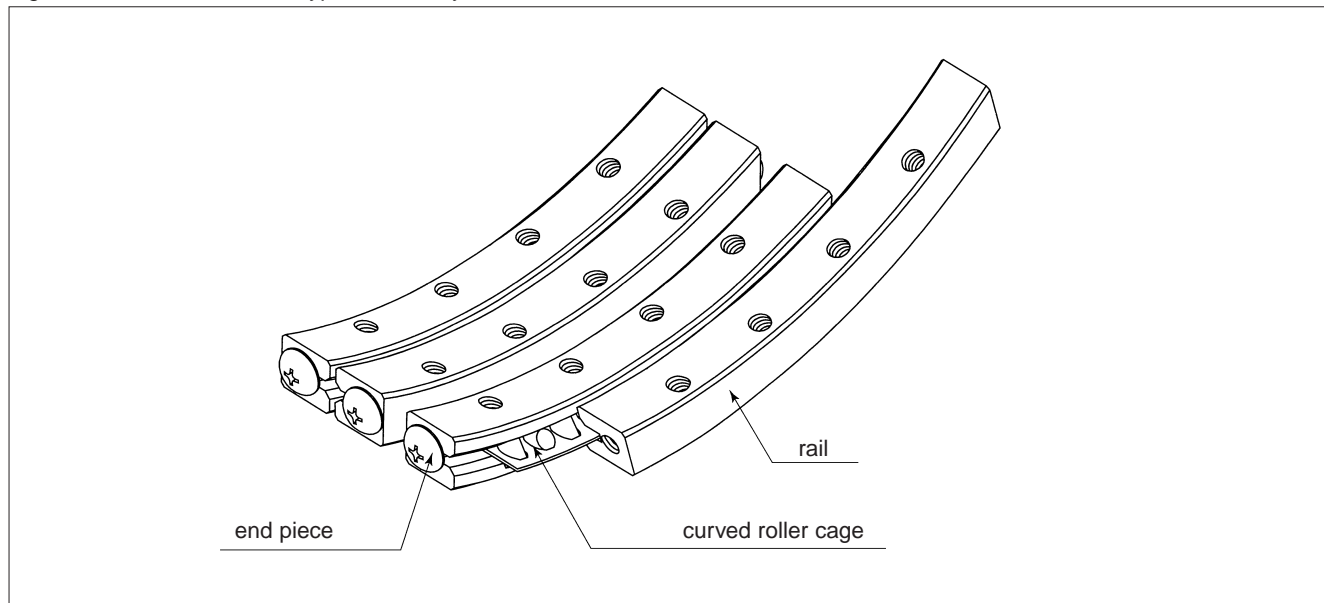

ACCURACY

The accuracy of a Gonio way is measured along its over all length, as shown in Figure H-43.


Table H-18 Accuracy unit/ μm

part number	accuracy
RV2040- 50	10
RV2060- 60	
RV3070- 90	
RV3070-110	
RV3100-160	

The reference surfaces are located on the opposite side of the “NB” mark.

There are inner reference plane and outer reference planes in one set of RV.

Figure H-43 Accuracy Measurement

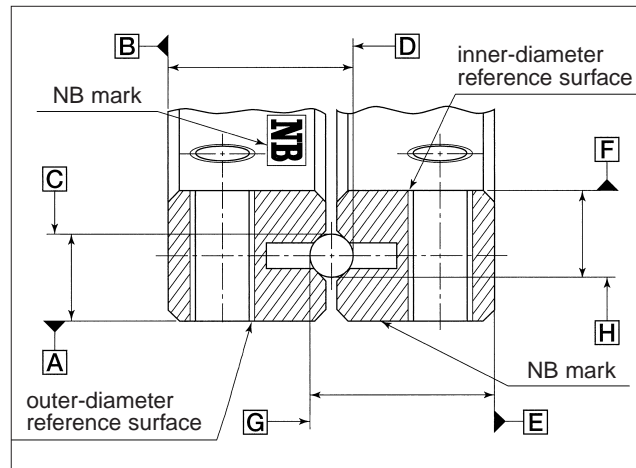

LIFE CALCULATION

The life of a Gonio way is obtained using the following equations.

Travel life:


$$L = \left(\frac{90}{\theta} \right) \cdot \left(\frac{f_T}{f_w} \cdot \frac{C}{P} \right)^{\frac{10}{3}}$$

L : travel life (10⁶ round trips) θ : rotating angle (degree)
 f_T : temperature coefficient f_w : load coefficient
 C : basic dynamic load rating (N) P : applied load (N)
 ※ Refer to page Eng. 5 for the coefficients.

Life time:

$$L_h = \frac{L \cdot 10^6}{60 \cdot n}$$

L_h : life time (hr)
 n : strokes frequency per min. (cpm)




SPECIAL REQUIREMENTS

NB can fabricate Gonio slide ways to meet special requirements, including slide ways with non-standard roller sizes, curved tracking base lengths, rotation center diameters, rotation ranges, and number of rollers. Contact NB for further information.

MOUNTING


Figure H-44 Example of Mounting

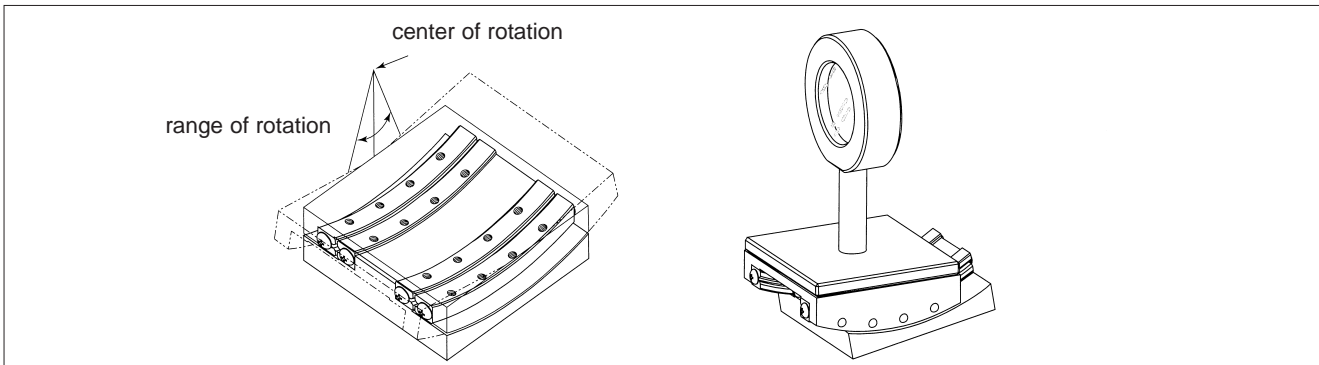

Accuracy of Mounting Surfaces:

The accuracy of the mounting should be maintained as needed for the operation. The accuracy of surfaces 1, 2, 3, and 4 (Figure H-45) directly affect the motion accuracy. They should be sufficient for the intended operation.


Figure H-45 Accuracy of Installation Surfaces

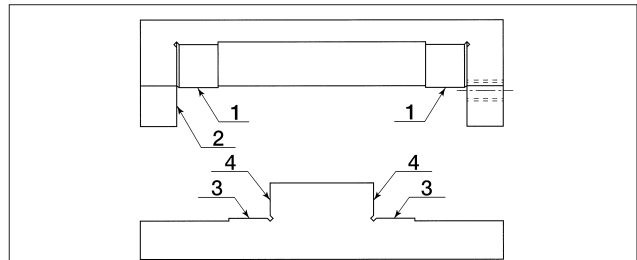

Procedure:

- (1) Remove burrs, dirt, dust, etc. from the table and the installation surfaces of the bed.
- (2) Apply a low viscosity oil to contact surfaces. Fix the rail ①② and ③ by tightening bolts to specified torque values (Table H-19, Figure H-46a).
- (3) Temporarily attach the rail ④ on curved tracking base to the adjustment side (Figure H-46b).
- (4) Remove the end pieces on one side of the rails and insert roller cages to the center (Figure H-46c).
- (5) Re-attach end-pieces.
- (6) Move table to the right and left (in the direction of the stroke) to position roller cages at the center of the curved rails.
- (7) Set an indicator at the side of the table on the reference surface (Figure H-46d).
- (8) Move table to one of the stroke ends and tighten the adjustment screws slightly. (Figure H-47e).

Figure H-46 Mounting Method (1)

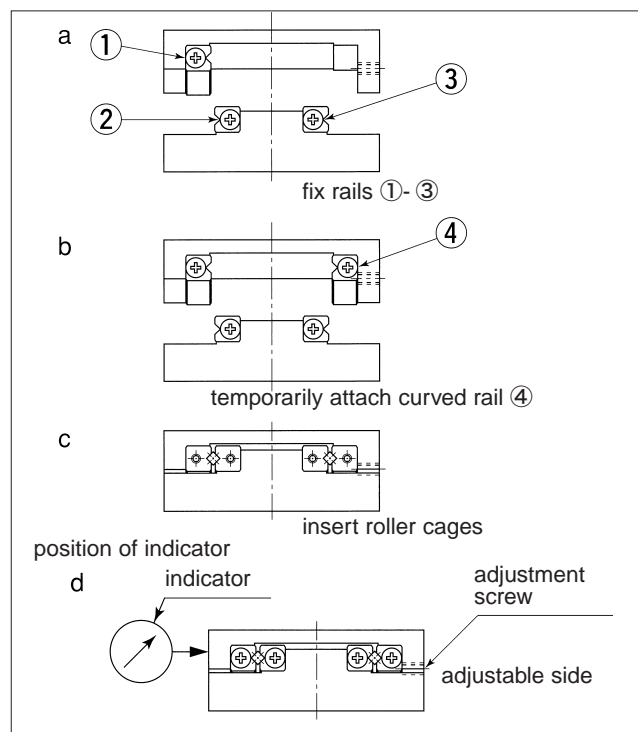


- (9) Move table fully to the other stroke end and tighten the adjustment screws slightly. (Figure H-47f).
- (10) Move the table to the center and lightly tighten adjustment screws (Figure H-47g).
- (11) Repeat steps (8) ~ (10) until there is no clearance around the table. If there is no clearance, the indicator will show a minimum fluctuation value when the table is moved to the right and left. Exercise care so as not to apply an excessive amount of pre-load.
- (12) Repeat steps (8) ~ (10) and tighten the adjustment screws uniformly.
- (13) Fix the rail ④. Tighten the roller cage bolts sequentially by moving the table in the same manner as for tightening the adjustment screws.

Table H-19 Recommended Torque for Installation Bolts unit/N · m

bolt size	torque
M3	1

Figure H-47 Mounting Method (2)

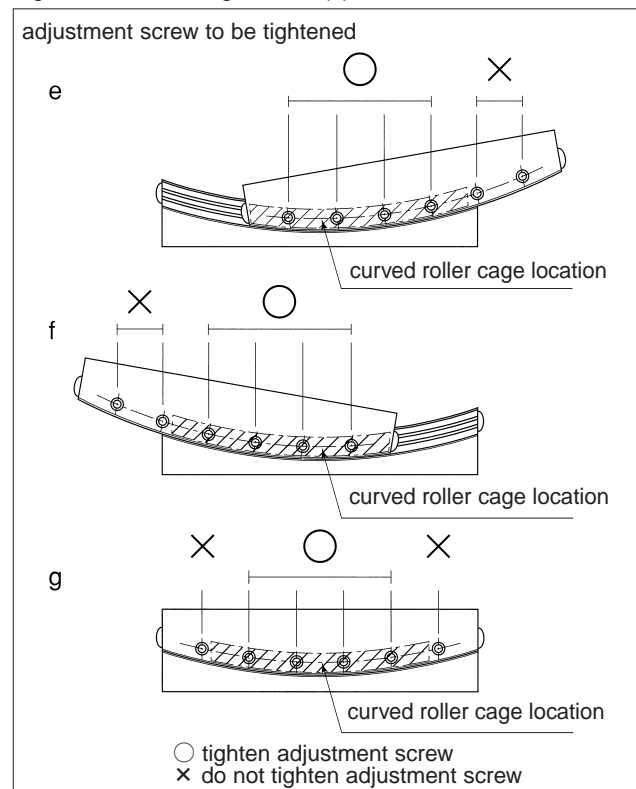

NOTES ON INSTALLATION

Lubrication:

NB Gonio slide ways are pre-lubricated using lithium soap grease prior to shipment, so they can be used immediately. Periodic application of a similar type grease is recommended depending on the operating conditions.

Dust Prevention:

Dust and foreign particles can affect the accuracy and life of a Gonio slide way. A table used in a hostile environment should be protected with a cover.

Operating Temperature:

The operating temperature should be kept between -20°C and 110°C.

Pre-load Adjustment:

Inaccurate pre-load adjustment will reduce the motion accuracy, resulting in skewing and shortening life. Careful adjustment is a requirement.

Cage Slippage:

When used under high speeds, or unbalanced loads, or when vibration condition are present, the roller cage slippage may occur. The rotation range should be determined with a sufficient margin, and an excessive pre-load should not be applied.

End Pieces:

End pieces are attached to each end of the rail to prevent removal of the cage. Do not use them as a mechanical stopper.

Careful Handling:

Dropping a Gonio slide way may result in scratches or dents on the raceway surfaces, preventing smooth motion and affecting accuracy. Care should be exercised in handling.

Use as a Set:



The accuracy tolerance of a Gonio slide way is designed to be adjusted within a particular set of components. If components from different sets are used, the accuracy may be affected.

Allowable Load


The allowable load is a load under which the sum of elastic deformation of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. Where very smooth and highly accurate liner motion is required, make sure to use the product within the allowable load values.

RV TYPE

— Gonio Way —

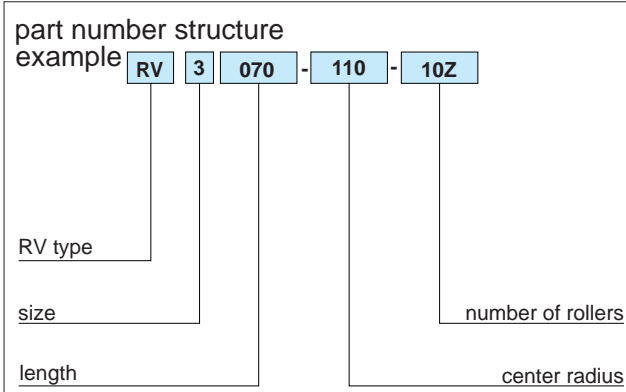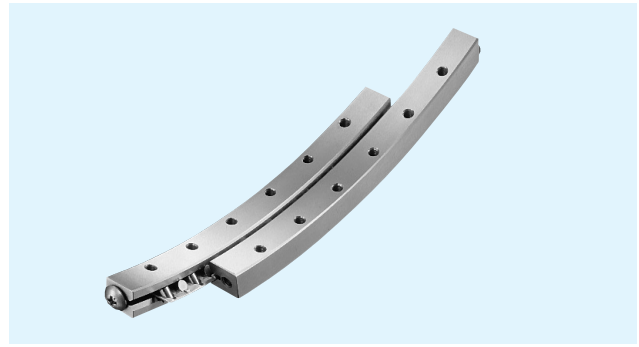

part number	rotation range	roller diameter D mm	No. of rollers Z	major dimensions						
				L mm	R mm	R ₁ mm	R ₂ mm	A mm	B mm	C mm
RV2040- 50- 7Z	±10°	2	7	40	50	53	47	15	6	7.25
RV2060- 60-12Z			12	60	60	63	57			
RV3070- 90-11Z	±10°	3	11	70	90	94	86	18	8	8.5
RV3070-110-10Z			10	70	110	114	106			
RV3100-160-14Z			14	100	160	164	156			

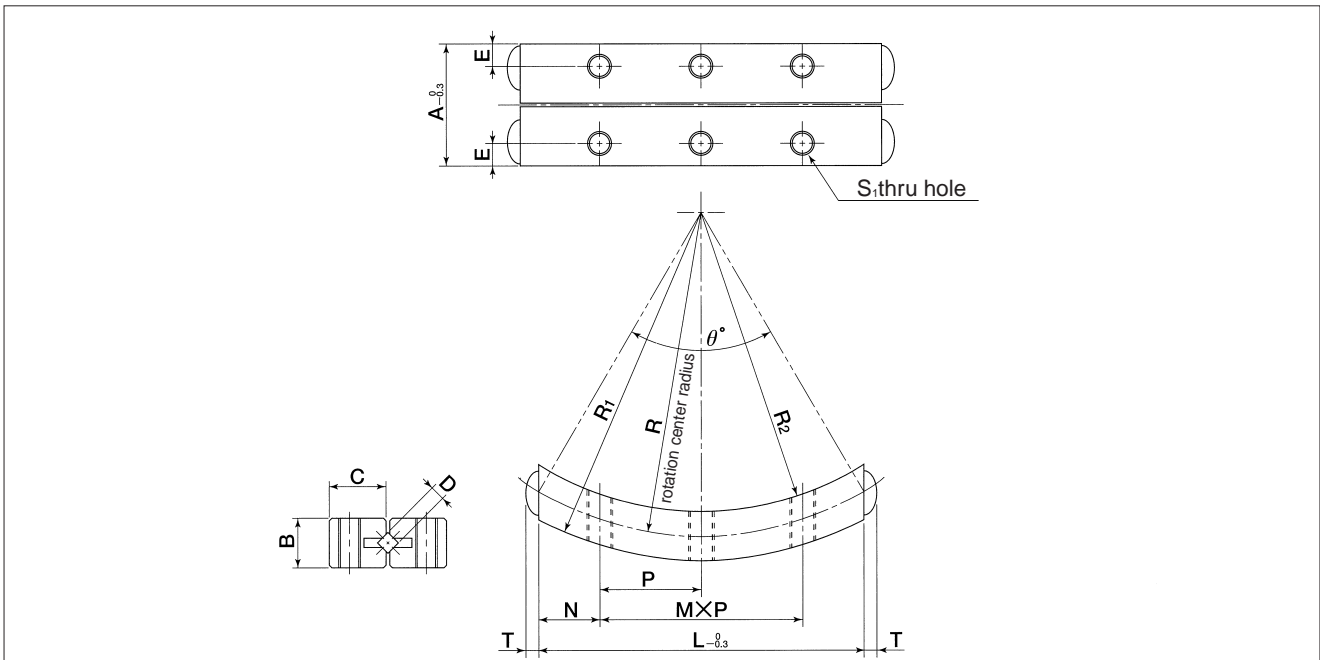

※ One set consists of 4 curved rails, 2 curved roller cages, and 8 end pieces.

M×P mm	N mm	E mm	S ₁	T mm	θ	basic load rating		allowable load F N	mass g	part number
						dynamic C N	static C ₀ N			
2×12.5	7.5	2.5	M3	1.5	47.2°	820	1,440	482	49	2040- 50- 7Z
3×12.5	11.25				60.0°	1,490	2,800	936	75	2060- 60-12Z
3×15	12.5	3	M3	1.9	45.8°	2,640	5,550	1,850	137	3070- 90-11Z
3×15					37.1°	2,440	5,620	1,870	135	3070-110-10Z
5×15					36.4°	2,860	7,890	2,630	193	3100-160-14Z

